

SPECIFICATIONS:



1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE:100M MIN.@500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

FOR 1 MINUTE



2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.
- 3. LIFE TEST: 10000 CYCLES
- 4. OPERATING TEMPERATURE: -25°C TO +85°C

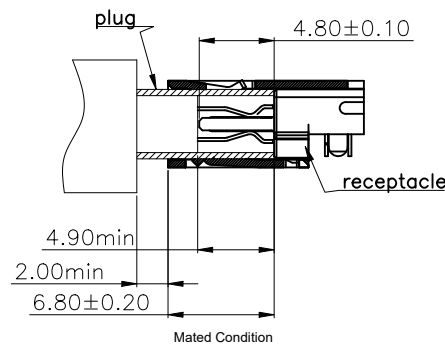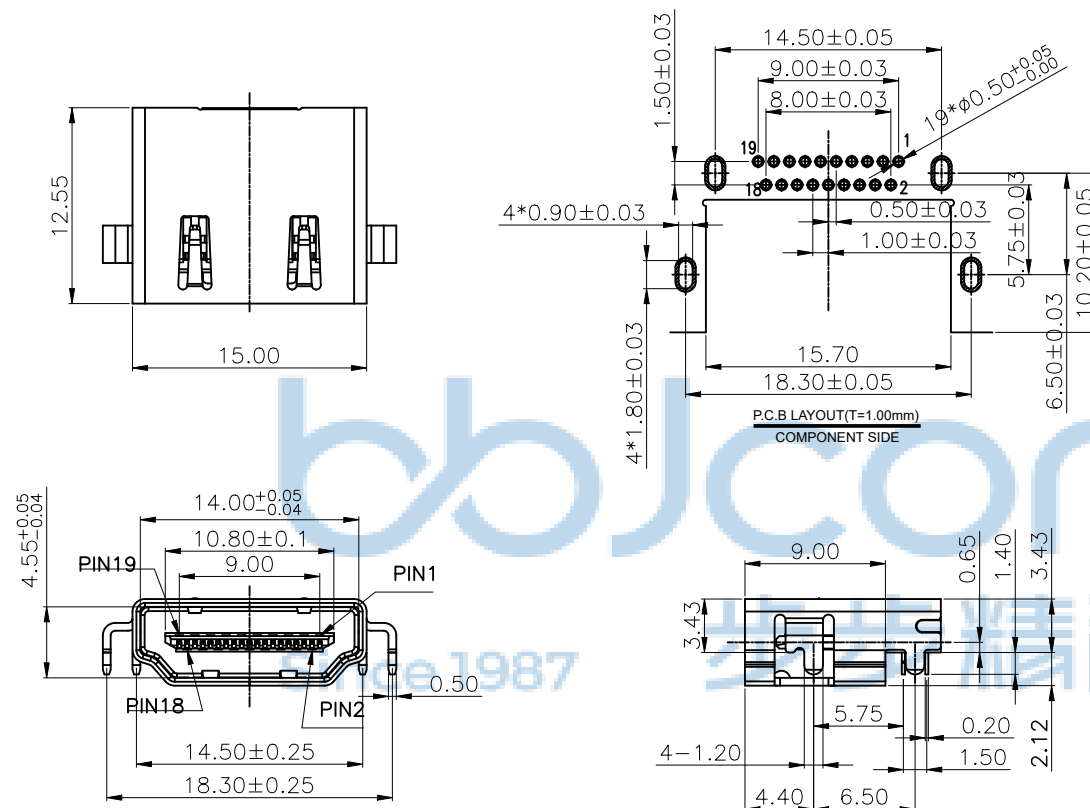

C	SHELL	1	S50C T=0.5MM,NI 50u"MIN NICEL ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: HDMI 19P 母座 四脚插 沉板2.12 平口 S50C钢壳 L=12.55 CH=0.65 编带	
APPD	JM_Zheng	PJ NO: 124-222-190010-J8G		SIZE:A4 DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
PDWG NO: 0873-1	DR	SGF	SCALE:N/A	REV:A0	UNIT:mm PAGE:1/2

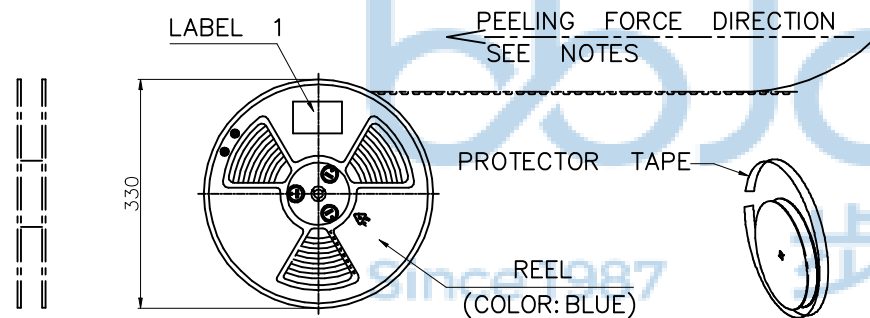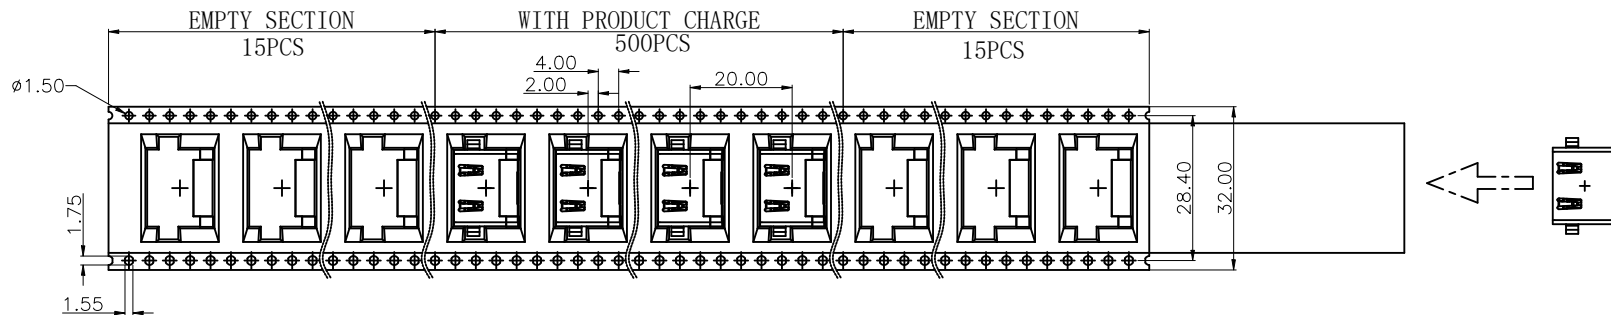

NOTES:

1. DIMNSION:

CARTON: 345*345*240mm,K=K. (1PCS)

EDGE BOARD: 340*310mm (4PCS)




CLAPBOARD: 330*330mm (2PCS)

2. QUANTITY:

500 PCS/REEL

6 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON

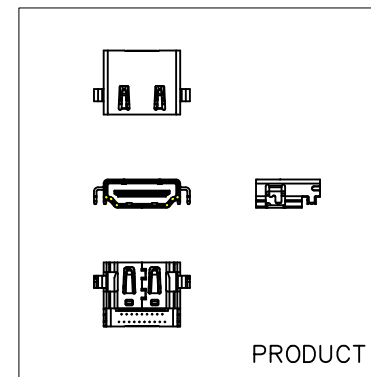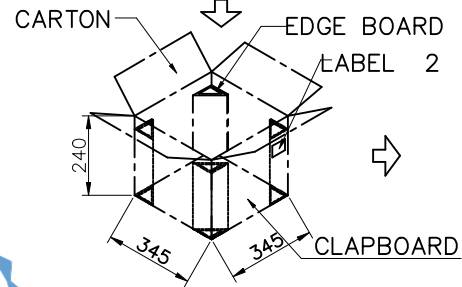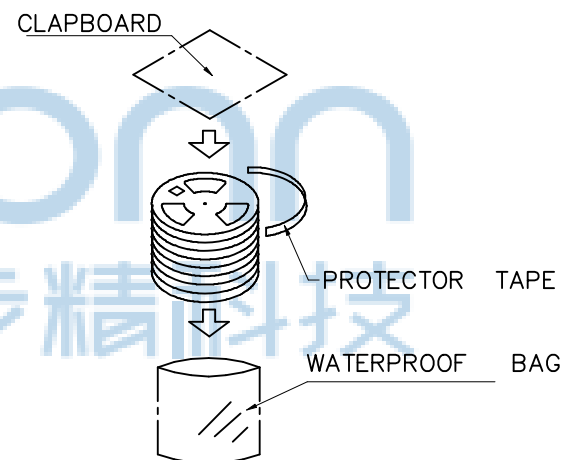

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: HDMI 19P 母座 四脚插 沉板2.12 平口 S50C钢壳 L=12.55 CH=0.65 编带	
APPD	JM_Zheng	PJ NO: 124-222-190010-J8G	
CHKD	LYX	SIZE:A4 DRW NO:	
PDWG NO: 0873-1	DR	SGF	FINISH:SEE NOTES MAT'L:SEE NOTES
			SCALE:N/A REV:A0 UNIT:mm PAGE:2/2