

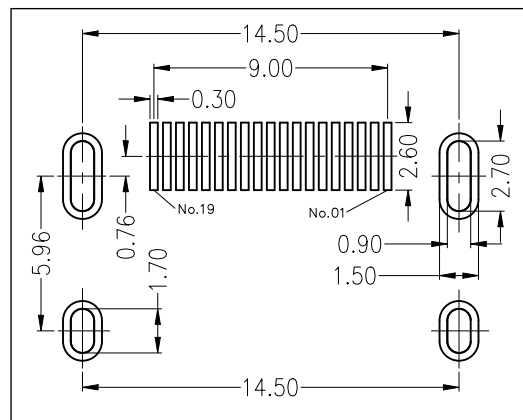
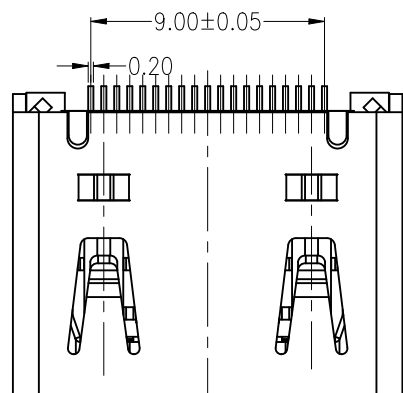
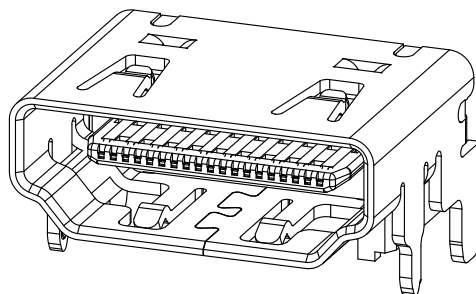
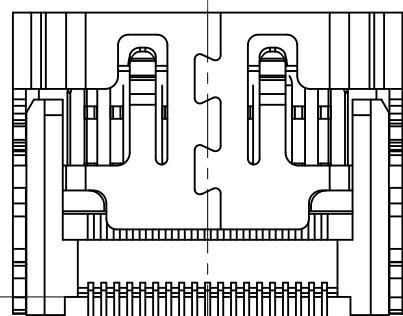
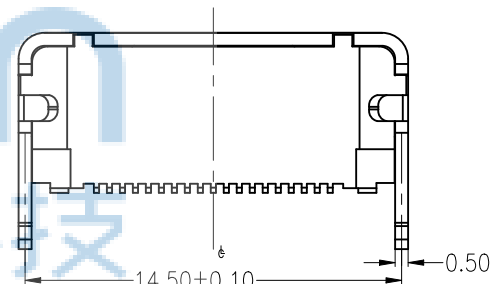


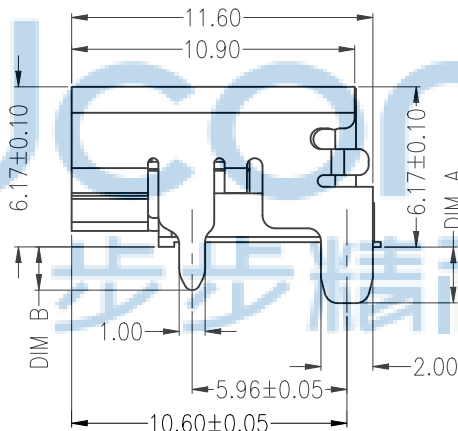

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)

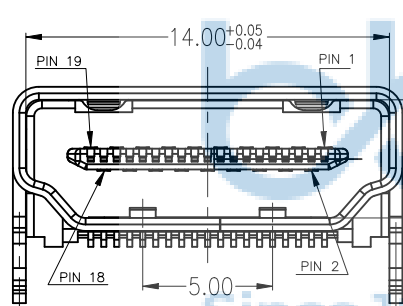

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

- MATERIAL:
HOUSING: LCP, BK, UL 94V-0
SHELL: SPCC/BRASS C2680
TERMINAL: BRASS C2680
- CONTACT PLATING:
50u" Min NICKEL UNDERPLATING OVER ALL
GOLD FLASH PLATING AT CONTACT AREA
80u" Min TIN AT SOLDERING AREA
SHELL PLATING: NICKEL 50U"Min
- ELECTRICAL:
INSULATION RESISTANCE: 100MΩ MIN
CONTACT RESISTANCE: 30mΩ MAX
DIELECTRIC WITHSTAND: 500 VAC FOR 1Min
CURRENT RATING: 0.5A
VOLTAGE RATING: 40V
- MECHANICAL:
INSERTION FORCE: 4.5 KGF MAX
WITHDRAWAL FORCE: 1.0~4.0 KGF
- DURABILITY: 10000 CYCLES
- TEMPERATURE RANGE: -55°C to +105°C




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上 四脚插 平口 铜壳镀镍 无凸点 端子SMT 端子镀金G-F	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$		PJ. NO.: 124-221-000002-00G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG. NO: 0100-2		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

外壳脚规格:

规格	DIM A	DIM B	外壳脚凸点
1	2.16	1.66	无凸点
2	2.16	1.66	有凸点
3	1.50	1.50	无凸点
4	2.20	2.20	无凸点
5	1.50	1.50	有凸点

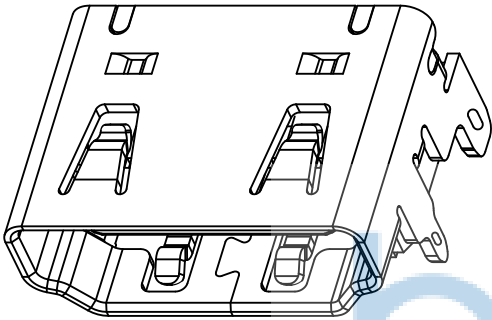


脚有凸点

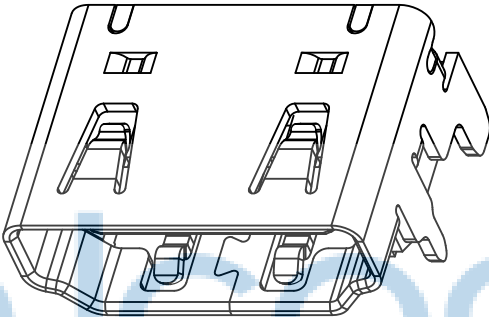


脚无凸点




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上 四脚插 平口 铜壳镀镍 无凸点 端子SMT 端子镀金G-F	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 124-221-000002-00G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0100-2		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	

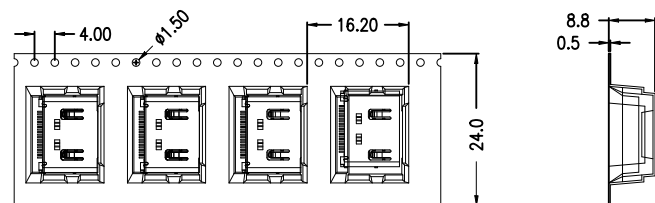

出料方向: 前

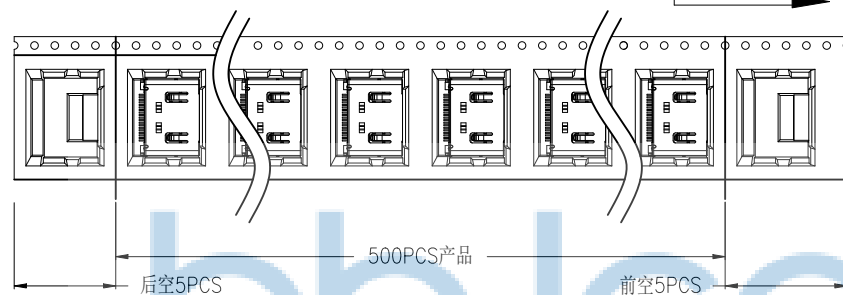

NO. 1

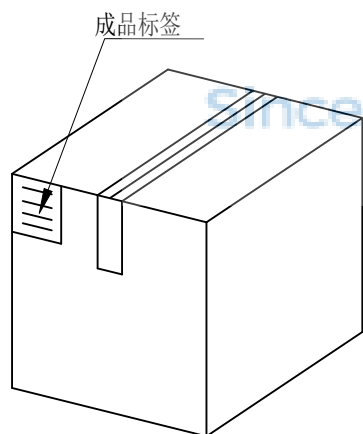

纸箱规格: 33*33*30.5cm


NO. 4

1. 包装要求:


- 1.1 每卷包装500pcs, 卷带前后各空出5pcs位置;
- 1.2 每10盘放一箱, 共计5kset;
- 1.3 纸箱外贴上标签

备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。

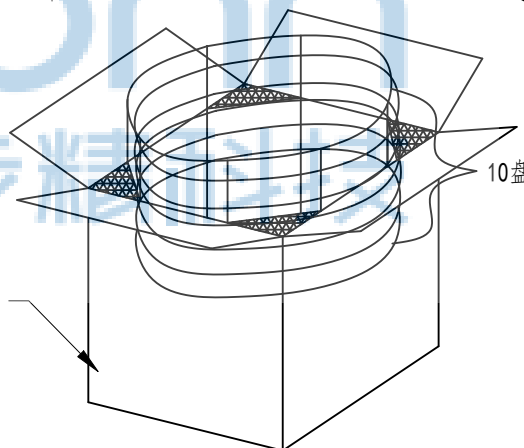

NO. 3

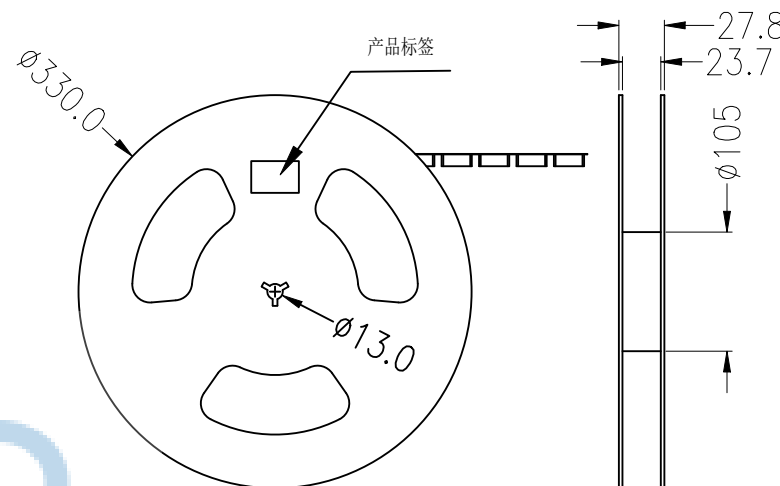

NO. 2



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0100-2	深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3* .X*: ±2* .XX*: ±1* NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上 四脚插 平口 铜壳镀镍 无凸点 端子SMT 端子镀金G-F APPD. JM_Zheng CHKD. LYX DR. TSP PJ. NO.: 124-221-000002-00G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3
---	--