




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

SPECIFICATIONS:


- 1.0 Electrical Performance:
 - 1.1 Contact current Rating:
 - 3.0 Amperes for VBUS and GND contacts.
 - 0.25 Amperes for all other contacts.
 - 1.2 Dielectric Withstanding Voltage: AC 100V(RMS).
 - 1.3 Insulation resistance: 100M ohms Min.
 - 1.4 Contact Resistance:
 - 30m ohm Max for VBUS and GND contacts.
 - 50m ohm Max for all other contacts.
 - 1.5 Voltage Rating : 30 Vac (rms).
- 2.0 Mechanical Performance:
 - 2.1 Mating Force: 35N Max.
 - 2.2 Unmating Force: 10N Min 8N Min After Durability.
 - 2.3 Durability: 5000 cycles.
- 3.0 Environmental Performance:
 - 3.1 Temperature Range:
 - 3.1.1 Operating Temperature: -55'to+85'.
 - 3.1.2 Storage Temperature: -20'to+60'.
 - 3.1.3 Salt Spray 72h Min.
- 4.0 MATERIAL:
 - 4.1 Housing: PA9T, UL94-V0.
 - 4.2 Contact: 2.0 contacts C5191.
3.0 contacts C2680.
 - 4.3 Shell: SUS340.
- 5.0 PLATING:
 - 5.1 Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all.
 - 5.2 Shell: The shell feet Wetting tin.

USB 3.1 AF Pin Assignment:

Pin No.	1	2	3	4	5	6	7	8	9
Signal Name	VBUS	D-	D+	GND	SSRX-	SSRX+	GND_DRAIN	SSTX-	SSTX+
Remark	USB2.0 Contact Pin				USB3.1 Contact Pin				

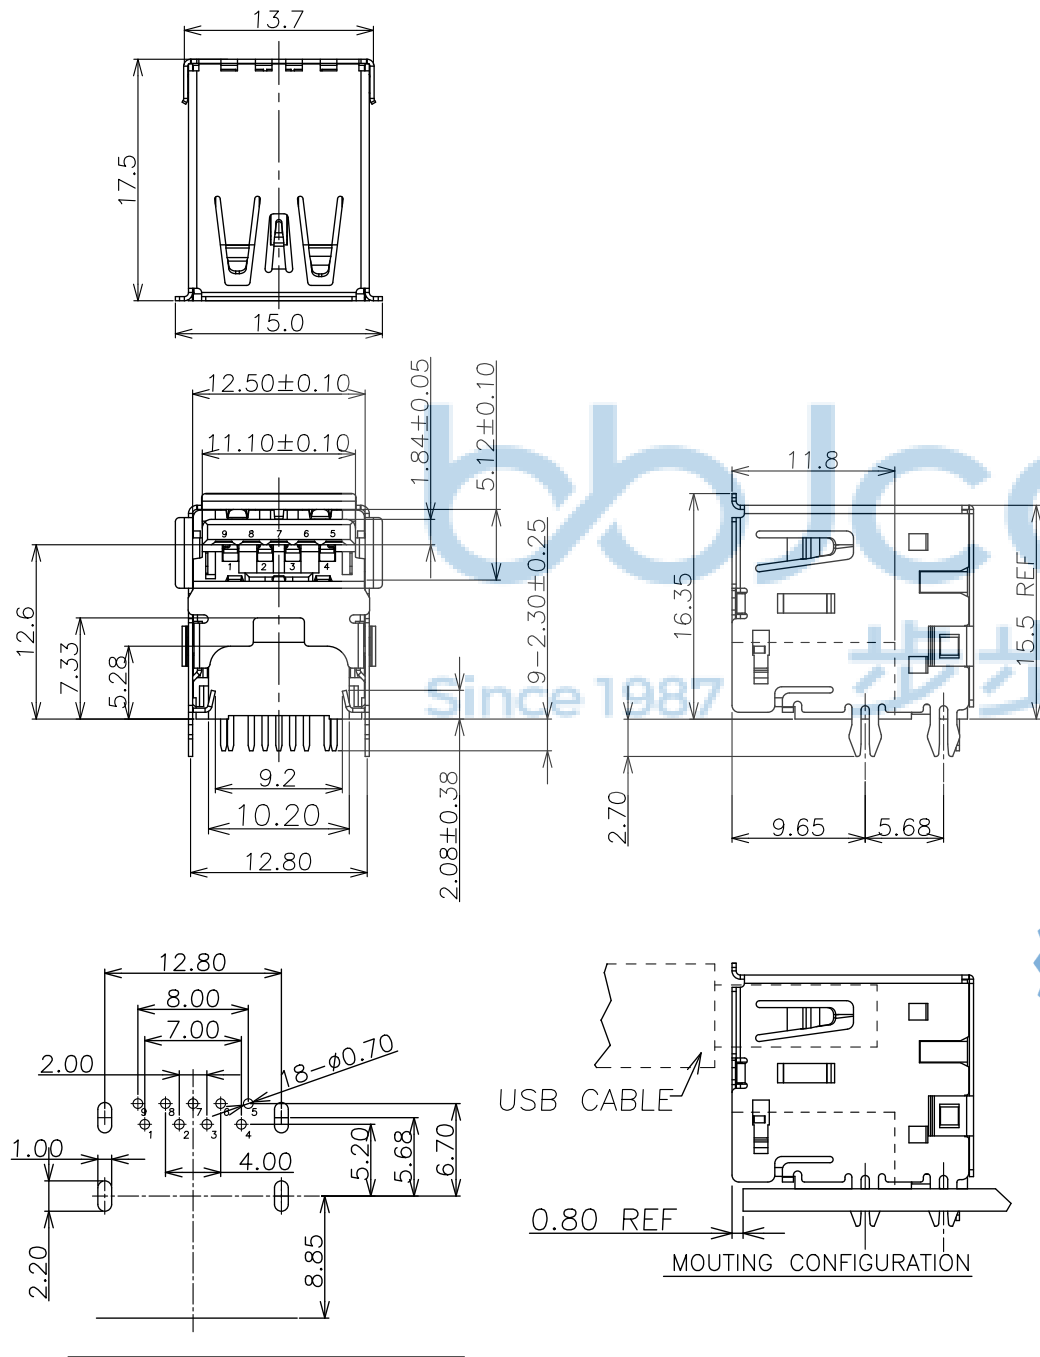


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG, NO:	0900-1	NAME:	USB 3.0 A母 单层 垫高款 90度 DIP 镀金G-F 四脚直插 鱼叉脚 卷边 不锈钢外壳 PA9T蓝胶 L=17.50 H=15.50 盒装
APPD.	JM_Zheng	PJ. NO.:	127-272-090001-J8G
CHKD.	LYX	SIZE:	A4 DRW NO.:
DR.	TSP	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/2

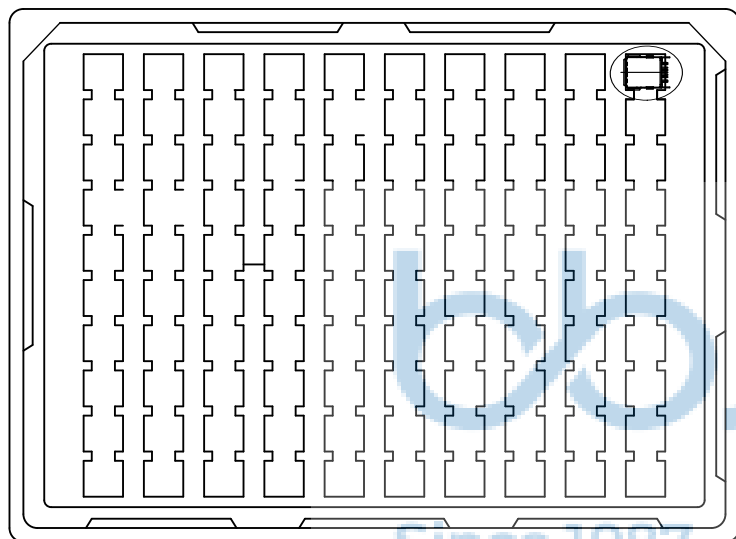

包装说明:

- 数量: 一盘=100Pcs
- 每10盘1000PCS叠成一叠, 每一叠配一个上盖, 在每叠产品左上角贴标签, 每叠上下各放一纸板并用透明胶缠紧;
- 每两叠并排放入纸箱, 每箱2000PCS, 包装过程中注意不可碰伤刮伤产品。
- 适用料号: 加高U3及特别要求双层USB3. 0, 双层USB 2. 0
- 外箱材质A=A.

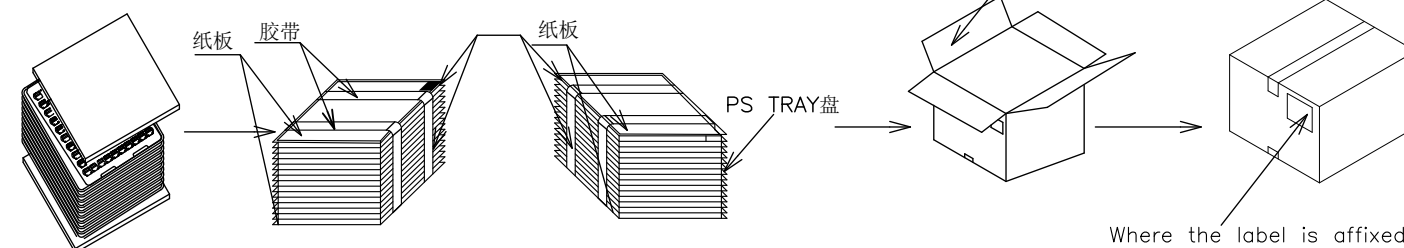

BOX DIMENSIONS:
470*320*325

Where the label is affixed

包装示意图

100	20	2000 PCS	-- KG	-- KG
PCS/ 盘	盘/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0900-1		深圳市步步精科技有限公司		NAME: USB 3.0 A母 单层 垫高款 90度 DIP 镀金G-F 四脚直插 鱼叉脚 卷边 不锈钢外壳 PA9T蓝胶 L=17.50 H=15.50 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 127-272-090001-J8G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 2/2	