
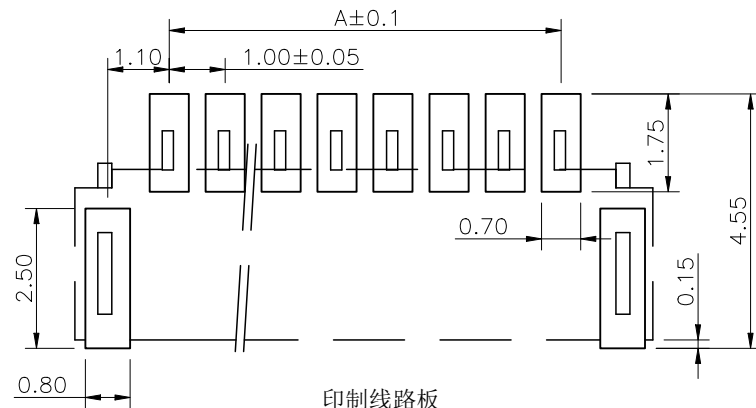
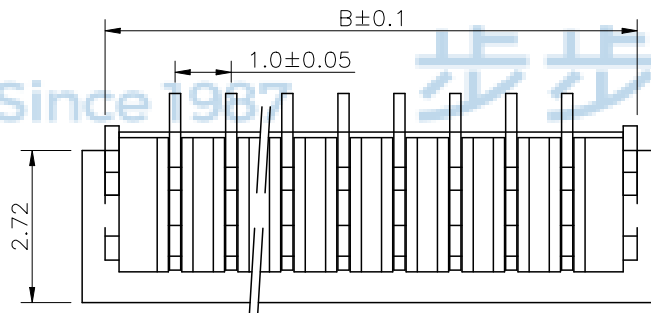
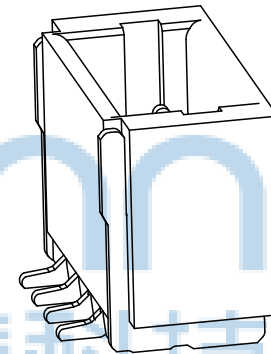


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:





- 1、额定电流: 1.0A AC/DC.
- 2、额定电压: 50V AC/DC.
- 3、耐电压:500V ACminute.
- 4、接触电阻: 20mΩ MAX.
- 5、绝缘电阻: 100MΩ MAX.
- 6、工作温度: -25~+105℃.

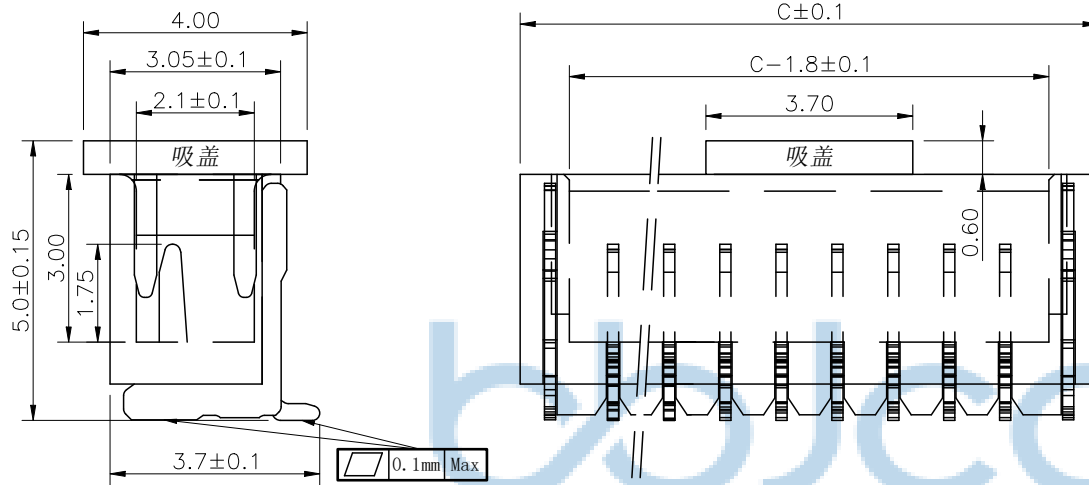

CKT	A	B	C
2P	1.00	3.50	4.30
3P	2.00	4.50	5.30
4P	3.00	5.50	6.30
5P	4.00	6.50	7.30
6P	5.00	7.50	8.30
7P	6.00	8.50	9.30
8P	7.00	9.50	10.30
9P	8.00	10.50	11.30
10P	9.00	11.50	12.30
11P	10.00	12.50	13.30
12P	11.00	13.50	14.30
13P	12.00	14.50	15.30
14P	13.00	15.50	16.30
15P	14.00	16.50	17.30
16P	15.00	17.50	18.30
17P	16.00	18.50	19.30
18P	17.00	19.50	20.30
19P	18.00	20.50	21.30
20P	19.00	21.50	22.30

序号	产品名称	材料规格	表面处理/颜色	数量
1	基座	VicrystR8530LCP	米黄色	1
2	簧片	黄铜	镀锡	N
3	固定片	黄铜	镀锡	2

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 1002-1		深圳市步步精科技有限公司 工程 部		NAME: 针座 1.0-2P 立贴 不带扣 米黄色 加盖编带	
APPD	JM_Zheng	PJ NO: 123-244-020001-J8G		SIZE:A4 DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
DR	SGF	SCALE:N/A		REV:A0 UNIT:mm PAGE:1/2	

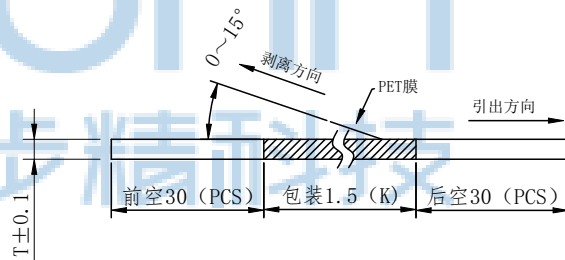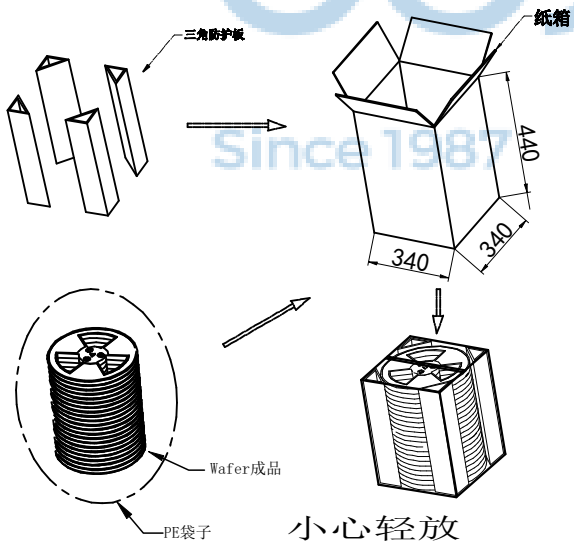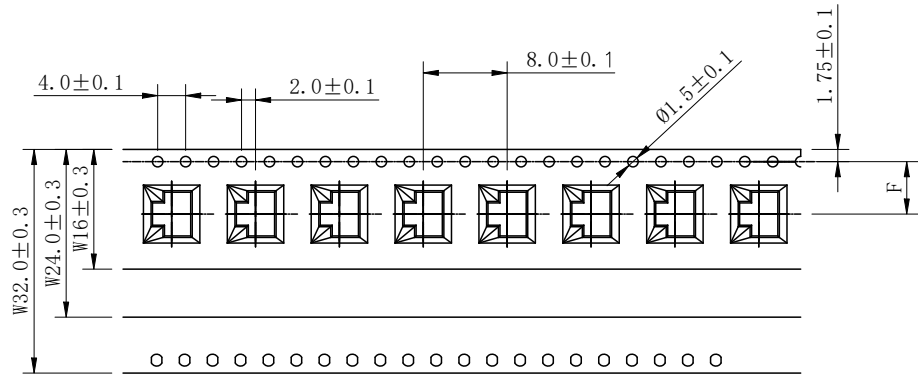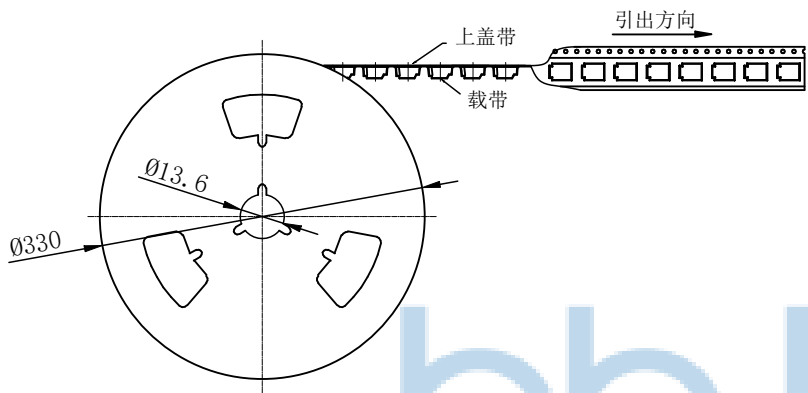

载带尺寸			
	W	Bo	F
2P	16±0.3	4.50±0.1	7.5±0.1
3P	16±0.3	5.50±0.1	7.5±0.1
4P	16±0.3	6.50±0.1	7.5±0.1
5P	16±0.3	7.50±0.1	7.5±0.1
6P	16±0.3	8.50±0.1	7.5±0.1
7P	24±0.3	9.50±0.1	11.5±0.1
8P	24±0.3	10.5±0.1	11.5±0.1
9P	24±0.3	11.5±0.1	11.5±0.1
10P	24±0.3	12.5±0.1	11.5±0.1
11P	24±0.3	13.5±0.1	11.5±0.1
12P	24±0.3	14.5±0.1	11.5±0.1
13P	24±0.3	15.5±0.1	11.5±0.1
14P	32±0.3	16.5±0.1	14.2±0.1
15P	32±0.3	17.5±0.1	14.2±0.1
16P	32±0.3	18.5±0.1	14.2±0.1

物料及技术参数	
载带	PS 雾透色 t=0.3±0.1
盖带	热封/自粘上盖带: PET=0.05mm
纸箱	纤维板, 波纹, 双墙, 黄色
转盘	聚苯乙烯, 耐热温度70℃, 蓝色
PET膜剥离力	30-70g, 剥离速度300mm/分钟
带子前后预留	前空22PCS, 后空22PCS

转装包装明细			
PIN位	每转包装数	每箱盘数	每箱只数
02P-07P	1500 (PCS)	20 (盘)	30 (K)
08P-13P	1500 (PCS)	14 (盘)	21 (K)
14P-16P	1500 (PCS)	11 (盘)	16.5 (K)

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 1002-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: 针座 1.0-2P 立贴 不带扣 米黄色 加盖编带

PJ NO: 123-244-020001-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/2