

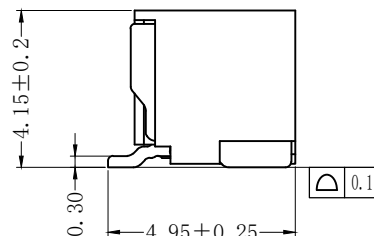




| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

技术要求:



- 1、塑件材料: LCP (UL-94V-0)
- 2、接触件: 磷青铜镀锡
- 3、接触电阻:  $\leq 20\text{m}\Omega$
- 4、绝缘电阻:  $\geq 100\text{M}\Omega$
- 5、额定电压: 50V AC DC
- 6、额定电流: 1.0A AC DC
- 7、耐压: 能承受500V AC/Min ute
- 8、工作温度:  $-25^{\circ}\sim +105^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $260_{-0}^{+5}$ , 时间 $2.5\pm 0.5$ 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

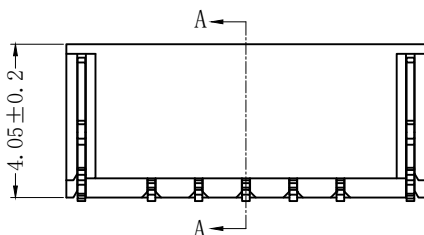

SECTION A-A

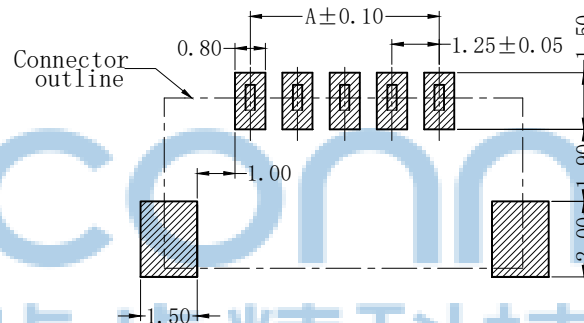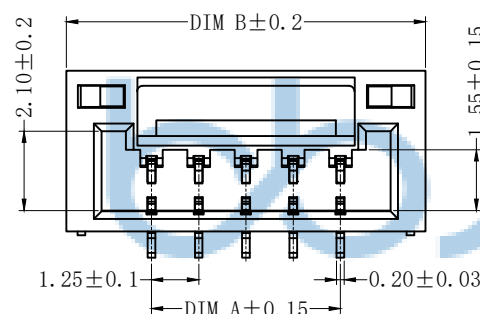

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

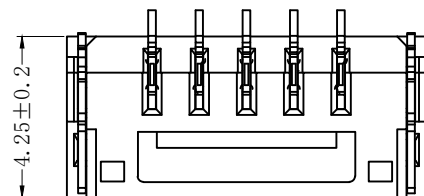

| Circuits | Dimensions (mm) |       |
|----------|-----------------|-------|
|          | A               | B     |
| 02       | 1.25            | 5.75  |
| 03       | 2.50            | 7.00  |
| 04       | 3.75            | 8.25  |
| 05       | 5.00            | 9.50  |
| 06       | 6.25            | 10.75 |
| 07       | 7.50            | 12.00 |
| 08       | 8.75            | 13.25 |
| 09       | 10.00           | 14.50 |
| 10       | 11.25           | 15.75 |
| 11       | 12.50           | 17.00 |
| 12       | 13.75           | 18.25 |
| 13       | 15.00           | 19.50 |
| ...      | ...             | ...   |
| 20       | 23.75           | 28.25 |


| 3  | 焊片 Fitting Nail | 磷青铜 Phosphor Bronze | 2   | 电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN. |
|----|-----------------|---------------------|-----|--------------------------------------|
| 2  | 端子 Contact      | 磷青铜 Phosphor Bronze | n*1 | 电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN. |
| 1  | 基座 Wafer        | LCP (UL94V-0)       | 1   | 本色                                   |
| 序号 | 名称              | 材料                  | 数量  | 附注                                   |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0510-1


|                                                       |                                               |                                                                                                                                   |
|-------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 深圳市步步精科技有限公司                                          |                                               | NAME:<br>针座 GH1.25(1.25-10P) 立贴 加盖 带扣 米黄色                                                                                         |
| .X: $\pm 0.38$<br>.XX: $\pm 0.25$<br>.XXX: $\pm 0.13$ | X': $\pm 3'$<br>X": $\pm 2'$<br>XX': $\pm 1'$ | PJ. NO.: 123-254-100001-Y3G<br>SIZE: A4 DRW NO.:<br>FINISH: SEE NOTES MAT'L.: SEE NOTES<br>SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3 |
| APPD. JM_Zheng                                        | CHKD. LYX                                     | DR. TSP                                                                                                                           |

# 各PIN结构示意图


| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | LQ       |




2P




3P




4P




5P




6P




7P

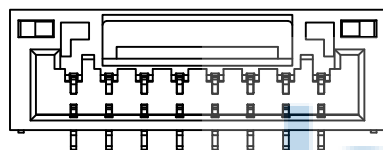


8P

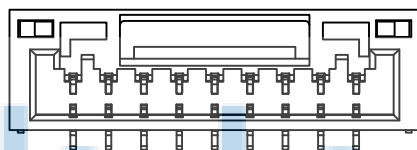


9P

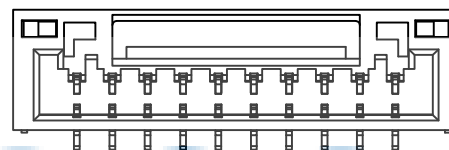


10P

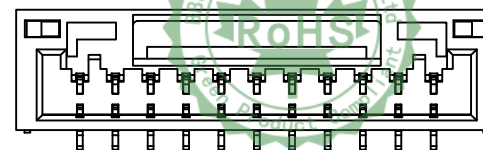

11P

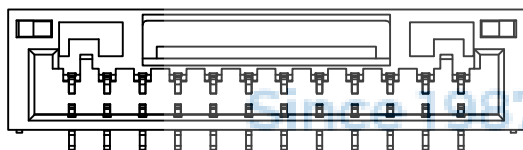


12P

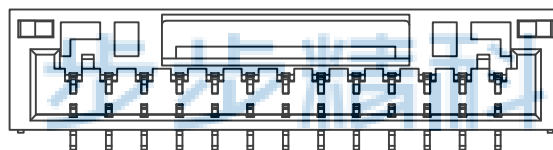


13P




14P

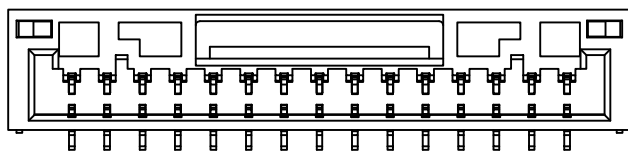



15P

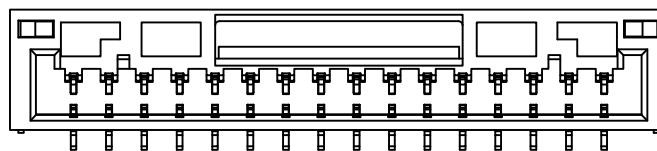




16P



20P



|                                                                                                                                                                              |          |                                                                                             |            |                                           |          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------|------------|-------------------------------------------|----------|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司<br>.X: ±0.38    .X': ±3"<br>.XX: ±0.25    .X': ±2"<br>.XXX: ±0.13    .XX': ±1" |            | NAME:<br>针座 GH1.25(1.25-10P) 立贴 加盖 带扣 米黄色 |          |
| APPD.                                                                                                                                                                        | JM_Zheng | PJ. NO.: 123-254-100001-Y3G                                                                 |            | SIZE: A4 DRW NO.:                         |          |
| CHKD.                                                                                                                                                                        | LYX      | FINISH: SEE NOTES                                                                           |            | MAT'L.: SEE NOTES                         |          |
| PDWG.NO:                                                                                                                                                                     | DR.      | LQ                                                                                          | SCALE: N/A | REV.: A0                                  | UNIT: mm |
|                                                                                                                                                                              |          |                                                                                             |            | PAGE: 2/3                                 |          |

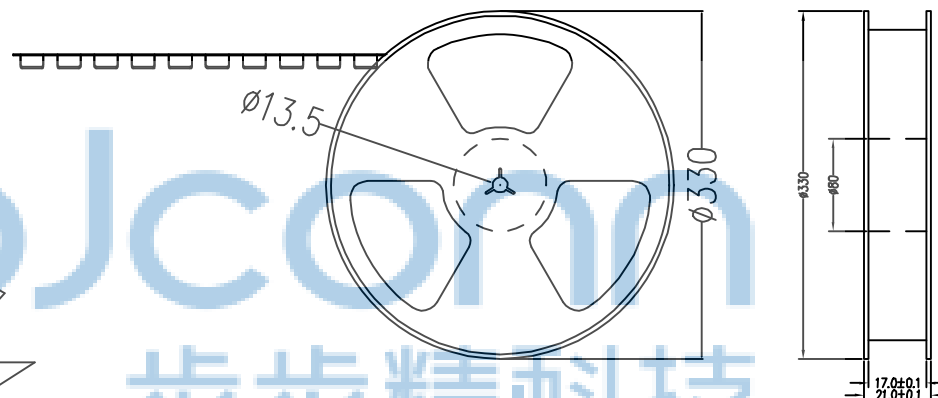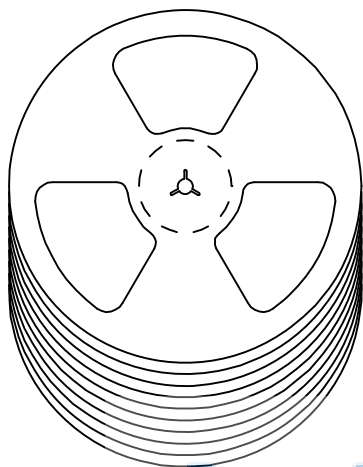

备注:

1. 包装数量: 1000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM

纸箱规格: 345\*345\*35MM

|                                                                                                                                                                              |                |                                           |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------|--|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |                | 深圳市步步精科技有限公司                              |  |
| .X: $\pm 0.38$                                                                                                                                                               | X': $\pm 3'$   | NAME:<br>针座 GH1.25(1.25-10P) 立贴 加盖 带扣 米黄色 |  |
| .XX: $\pm 0.25$                                                                                                                                                              | .X': $\pm 2'$  | P.J. NO.: 123-254-100001-Y3G              |  |
| .XXX: $\pm 0.13$                                                                                                                                                             | .XX': $\pm 1'$ | SIZE: A4 DRW NO.:                         |  |
| APPD. JM_Zheng                                                                                                                                                               | CHKD. LYX      | FINISH: SEE NOTES MAT'L.: SEE NOTES       |  |
| PDWG.NO: 0510-1                                                                                                                                                              | DR. TSP        | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3    |  |