




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTES:




1. Plating specification,
2-1. Contact:
Contact area: Ni30u"Min/Au See Table;
Solder area: Ni30u"Min/Sn100u"Min.
Other area: Ni 30u"Min.
2-2. Shell: Ni50u"~150u";
2. Mechanical Performance ,
3-1. Insertion Force:35 N Max;
3-2. Extraction Force:10 N Min;
3-3. Durability:1500 CYCLE.
3. Electrical Performance,
4-1. Insulation Resistance:1000M Ω Min.
4-2. Contact Resistance :30m Ω Max.
4-3. Dielectric Strength :500V AC.
4-4. Contact Current Rating: 3 A.
5. The product accords with ROHS STD.
6. Operation Tempreature -55° C~+85° C.

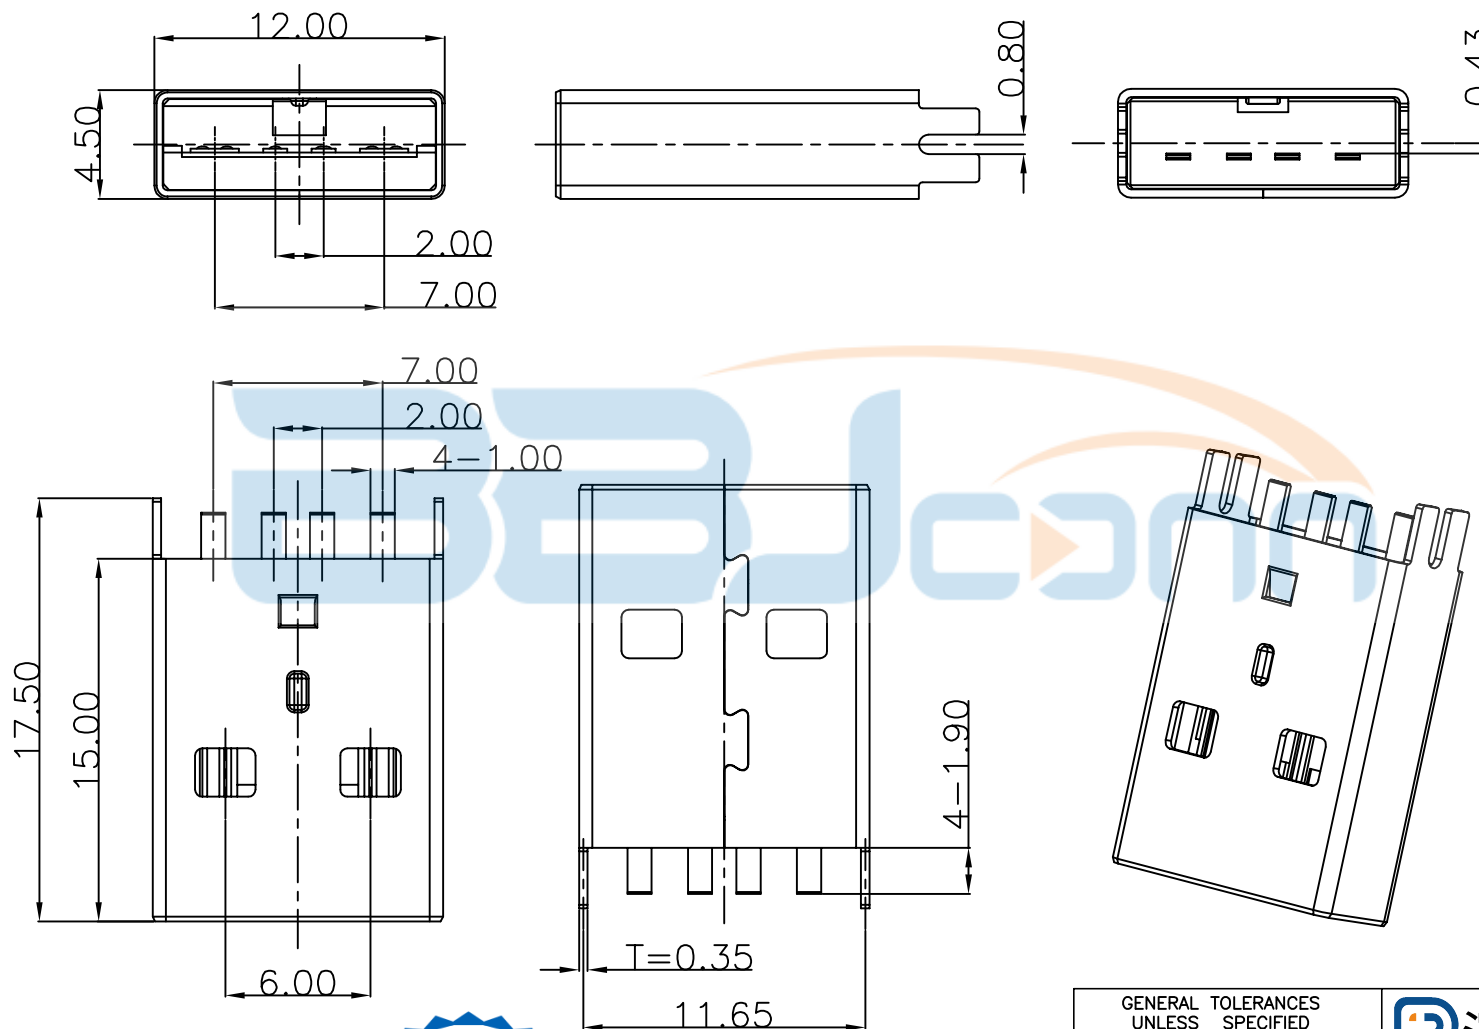

GENERAL TOLERANCES UNLESS SPECIFIED			深圳市步步精科技有限公司			
.x $\pm$ 0.35	.x° $\pm$ 3°		TITLE: USB 2.0 公头 180度 H=15.00 夹板0.8 平口 (居中款)			
.xx $\pm$ 0.25	.x° $\pm$ 2°		DRAWN/ DATE	设计	LHC	SIZE:A4 UNIT:MM. PART. NO: UB.02.62-11-W001
.xxx $\pm$ 0.15	.xx° $\pm$ 1°		CHECKED/ DATE	审核	LYX	SCALE: 1:1 PROJECTION REV.: 版本
			APPROVED/ DATE	核准	LJP	DWG. PATH 0500-1 SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

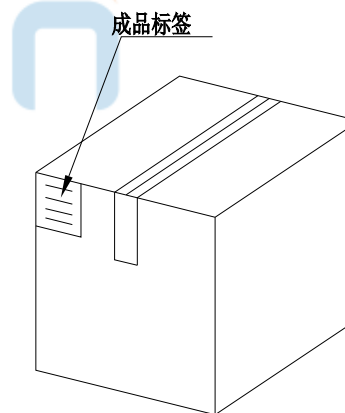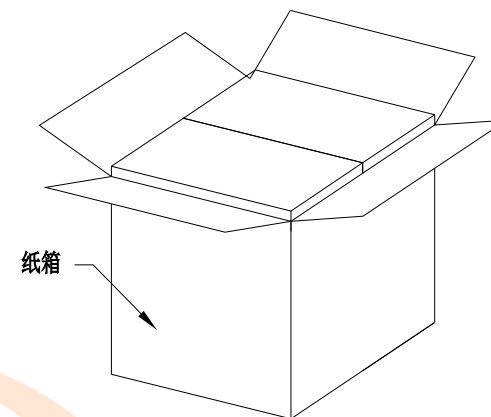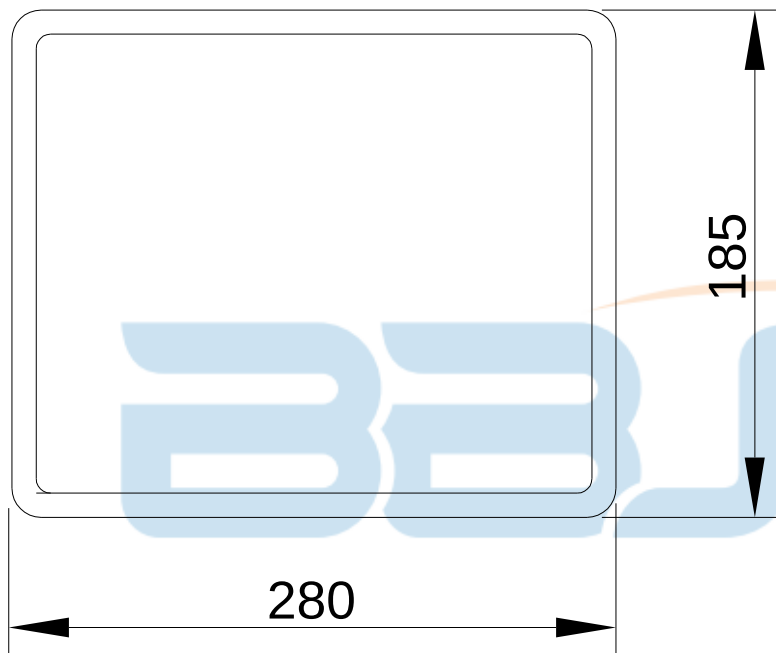

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每40盘放一箱, 共计4000PCS;
- 1.3 纸箱外贴上标签



TOLERANCE UNSPECIFIED . .0 ±0.35 .00 ±0.25 .000 ±0.15 X.° ±2.00° CUSTOMER DRAWING			深圳市步步精科技有限公司			
DRAWN/ DATE			TITLE: USB 2.0 公头 180度 H=15.00 夹板0.8 平口 (居中款)			
CHECKED/ DATE			SIZE: A4	UNIT: MM.	PART. NO: UB.02.62-11-W001	REV.: 版本
APPROVED/ DATE			DWG. PATH	PROJECTION		SHEET: 页码
设计 ZY			SCALE: 1:1		0500-1	
审核 LYX			核准 LJP			