

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	







NOTES:

MATERIALS


- HOUSING:
HI-TEMP. PLASTIC UL 94V-0 BLACK
- CONTACT
COPPER ALLOY, T=0.15mm
GOLD PLATED ON CONTACT AREA
GOLD FLASH PLATED ON SOLDER TAILS UNDER NICKEL PLATED
- SHELL:
STAINLESS STEEL OR COPPER ALLOY T=0.3mm
MATTE TIN PLATING OVERALL UNDER NICKEL PLATED

SPECIFICATIONS

- VOLTAGE RATING: 30V AC
- CURRENT RATING: WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A (FOR TERMINAL NO. 2, 3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A (FOR TERMINAL NO. 1 AND 5)
0.5A (FOR TERMINAL NO. 2, 3 AND 4)
- INSULATION RESISTANCE: 100M MINIAT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE: 100V (r. m. s.) AC FOR 1 MINUTE
- CONTACT RESISTANCE: 30m MAX.
- OPERATING TEMPERATURE: -30 TO +80°C

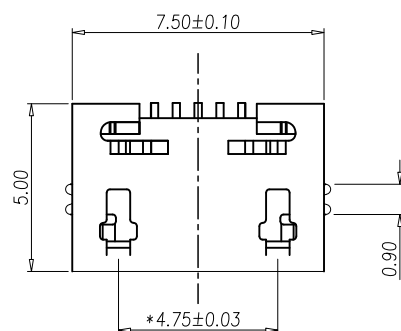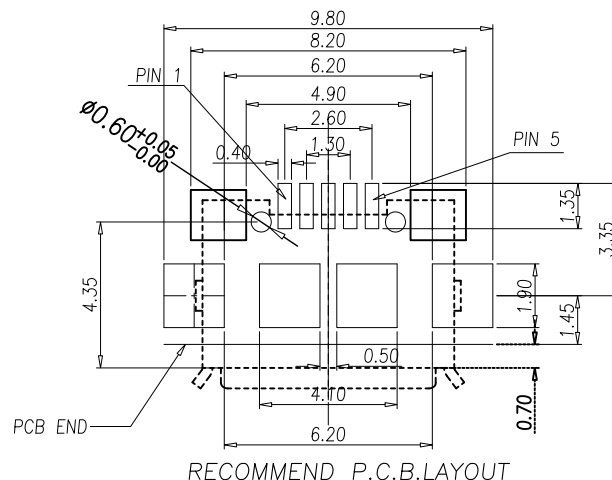

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0526-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .X': ±1"			
		NAME:		MICRO 5P 母座 L=5.0 全贴 带柱 端子SMT 平口 雾锡 铜壳			
				PJ. NO.: MC.01.32-11-J001 SIZE: A4 DRW NO.:			
		FINISH: SEE NOTES		MAT'L.: SEE NOTES			
		APPD. JM_Zheng 23/05'02	CHKD. LYX 23/05'02	SCALE: N/A	REV.: A3	UNIT: mm	PAGE: 1/1
		DR. SGF 23/05'02					

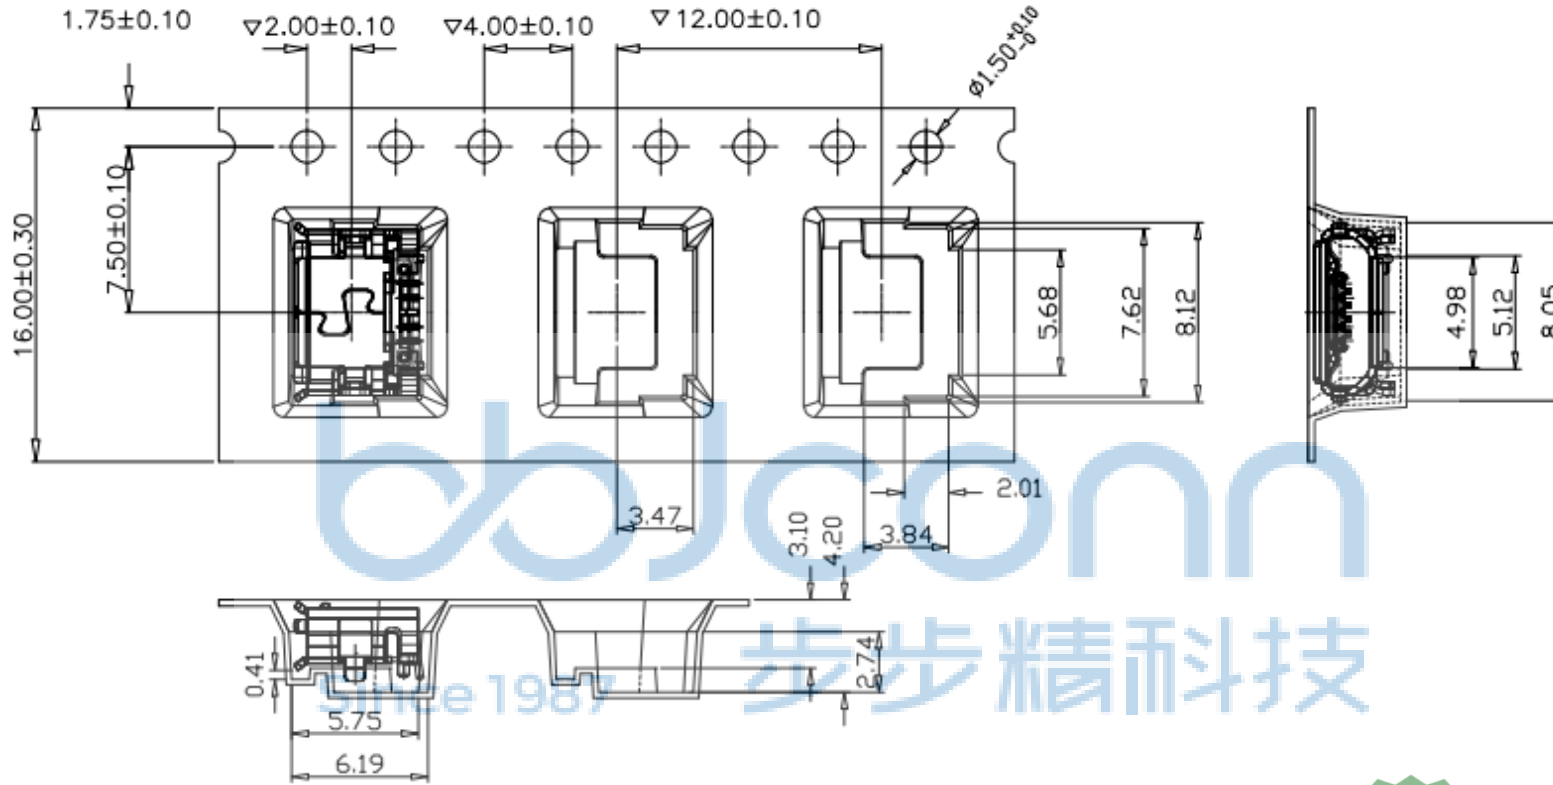

NOTE:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm Max. in 250mm.
3. All dimensions meet EIA-481-D requirements.
4. Material: Polystyrene
5. Thickness: $0.3t$
6. Recommend hub diameter: _____ mm.
7. Packing length per 22" reel: _____ Meters; per 13" reel: 12.5 Meters.
8. Component load per 13" reel: 1500 pcs.



封箱方式	顶部、底部“一”字封箱法
标签	贴外箱标签, 并在外箱标签上编序号
圆盘	13"16宽普通, 横着放
纸箱	345*345*355 纸箱; 16R/箱
项目	要求

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ X'': $\pm 1'$		NAME: MICRO 5P 母座 L=5.0 全贴 带柱 端子SMT 平口 雾锡 铜壳			
APPD.	JM_Zheng	23/05/02		PJ. NO.: MC.01.32-11-J001			
CHKD.	LYX	23/05/02		SIZE: A4 DRW NO.:			
PDWG.NO: 0526-1	DR.	SGF	23/05/02	FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1			