


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	

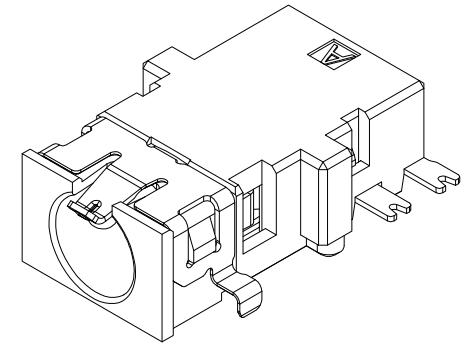

3D VIEW

NOTES:

1. REQUEST OF THE SPECIFICATION:

1.1 CONTACT CURRENT RATING: 1A.;


1.2 CONTACT RESISTANCE: 100 mΩ MAX.;

1.3 INSULATION RESISTANCE: 100MΩ MIN.;



1.4 DIELECTRIC WITHSTANDING: 500V

1.6 CONNECTOR MATING FORCES: 29.8N (3.00Kgf) MAX.;

1.7 CONNECTOR UNMATING FORCES: 2.98N(0.30Kgf) MIN.;

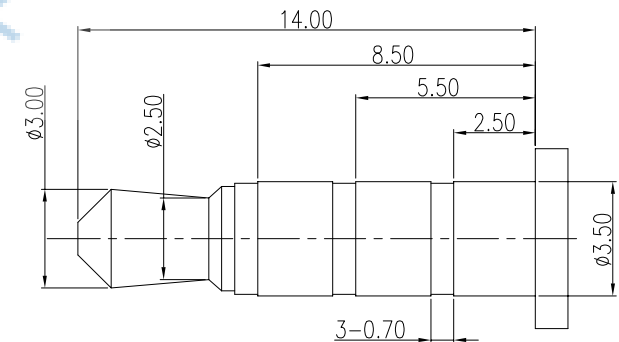

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



SCHEMATIC

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE:±0.05)



7	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
6	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20
5	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20
4	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
ITEM	NAME	QTY	DESCRIPTION	NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE

NOT BE USED IN WHOLE

	OR IN PART WITHOUT
--	--------------------

PRIOR WRITTEN PERMISSION.

0050

PDWG,NO: 0076-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

APPD	IM Zheng	23/05'02
------	----------	----------

APPD:	JM_Zheng	23/03/02

CHKD. LYX 23/05'02

33	221
----	-----

DR.	SGF	23/05'02
-----	-----	----------

NAME:

3.5耳机座 无头 沉板1.0 两脚插四脚贴 四节 (PJ35A083-F06J1BR-E)








PJ. NO.:	PJ.03.22-01-3008
----------	------------------

	No. 100122 02 0000	
	SIZE: A4	DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/1
------------	----------	----------	-----------



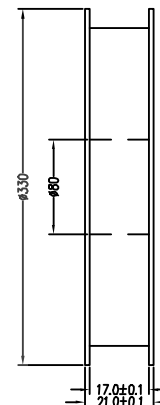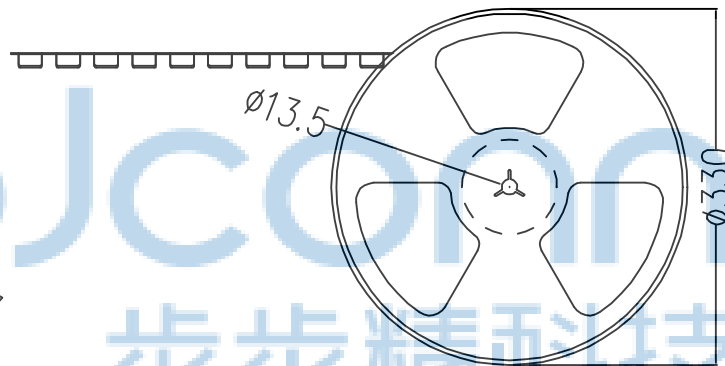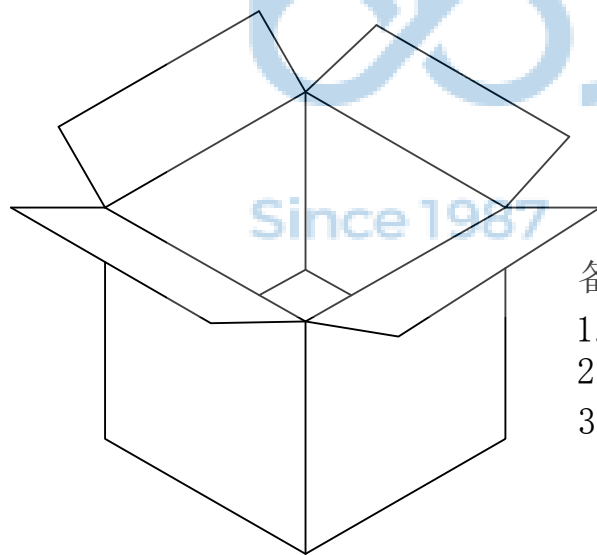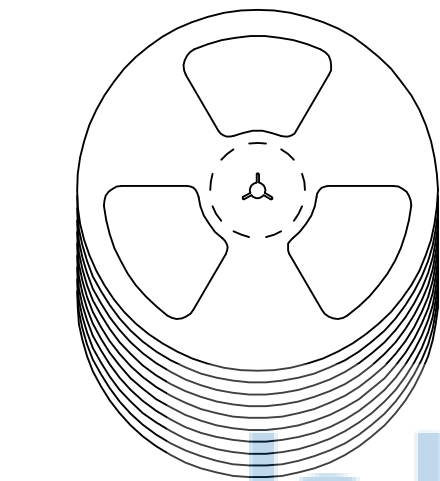

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱或15卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 3.5耳机座 无头 沉板1.0 两脚插四脚贴 四节 (PJ35A083-F06J1BR-E)	
X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$		PJ. NO.: PJ.03.22-01-3008	
APPD. JM_Zheng 23/05'02		SIZE: A4 DRW NO.:	
CHKD. LYX 23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF 23/05'02		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	