

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PA9T BLACK UL 94 V-0
1.2 CONTACT(4pin):C5191 (T=0.20mm)
1.3 CONTACT(5pin):C2680 (T=0.20mm)
1.4 SHELL:SUS 304 (T=0.30mm)

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE: 30mΩ MAXIMUM
2.2 CONTACT CURRENT RATING: 1.5A
2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3 MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:3.5kg MAX
3.2 UNMATED FORCE:1.02kg MIN
3.3 DURABILITY:MANDATORY:5,000 CYCLES
3.4 EXTRACTION FORCE:0.8kg MIN

4. PLATING

4.1 TERMINAL:

- 50u" MIN NICKEL ALL OVER
80u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA

4.2 SHELL:50u"MIN. NICEL ALL OVER



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3'$
.XX: ± 0.25	.X*: $\pm 2'$
.XXX: ± 0.13	.XX*: $\pm 1'$

APPD.	JM_Zheng
-------	----------

CHKD.	LYX
-------	-----

DR.	SGF
-----	-----


NAME:USB 3.1 AF 90度 外壳四脚DIP 端子DIP 反向沉板3.16
L=15.60 CH=0.3 脚距15.70 平口 不锈钢外壳 镀金足1u 编带

	PJ. NO.: 127-272-090013-P2G
---	-----------------------------







	SIZE: A4	DRW NO.:
---	----------	----------


FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

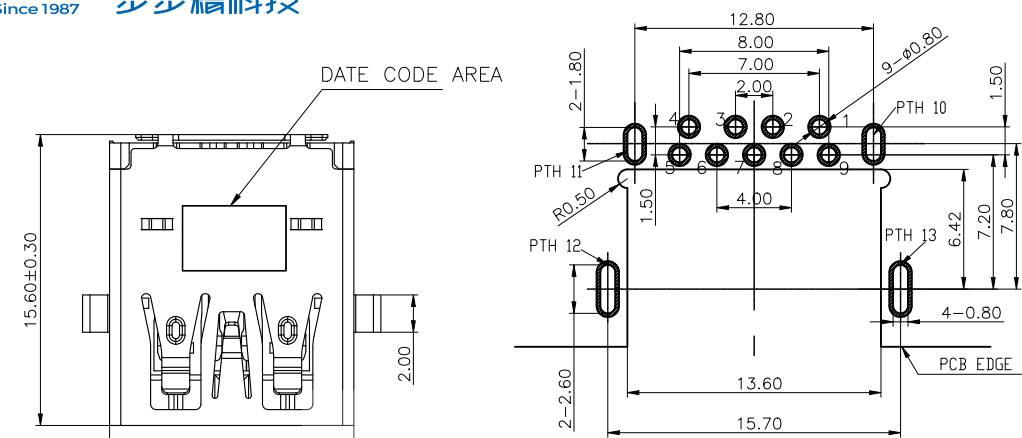

THICKNESS: 1.0mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

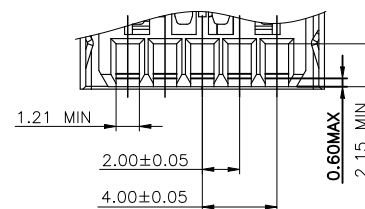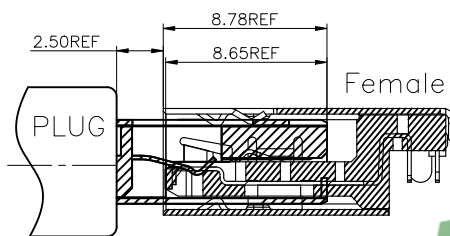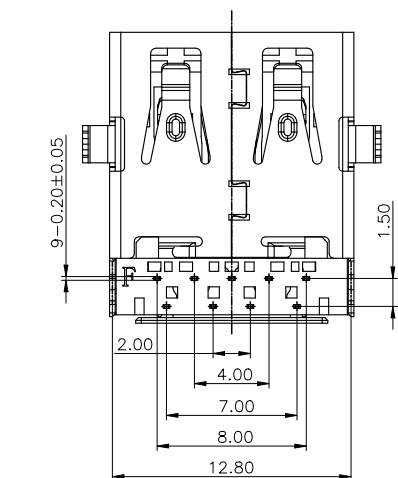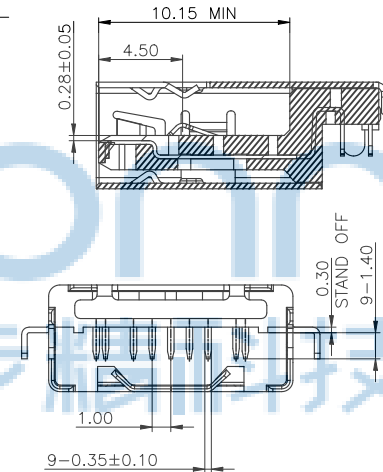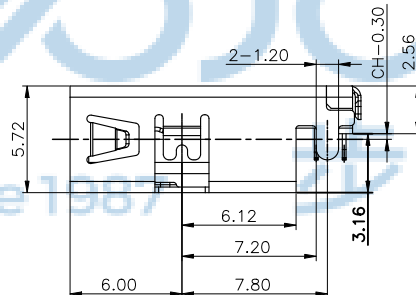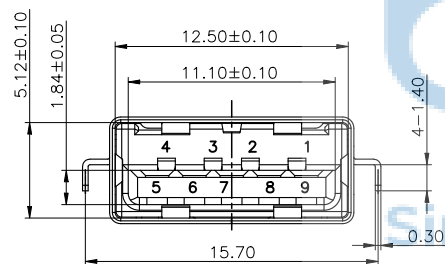

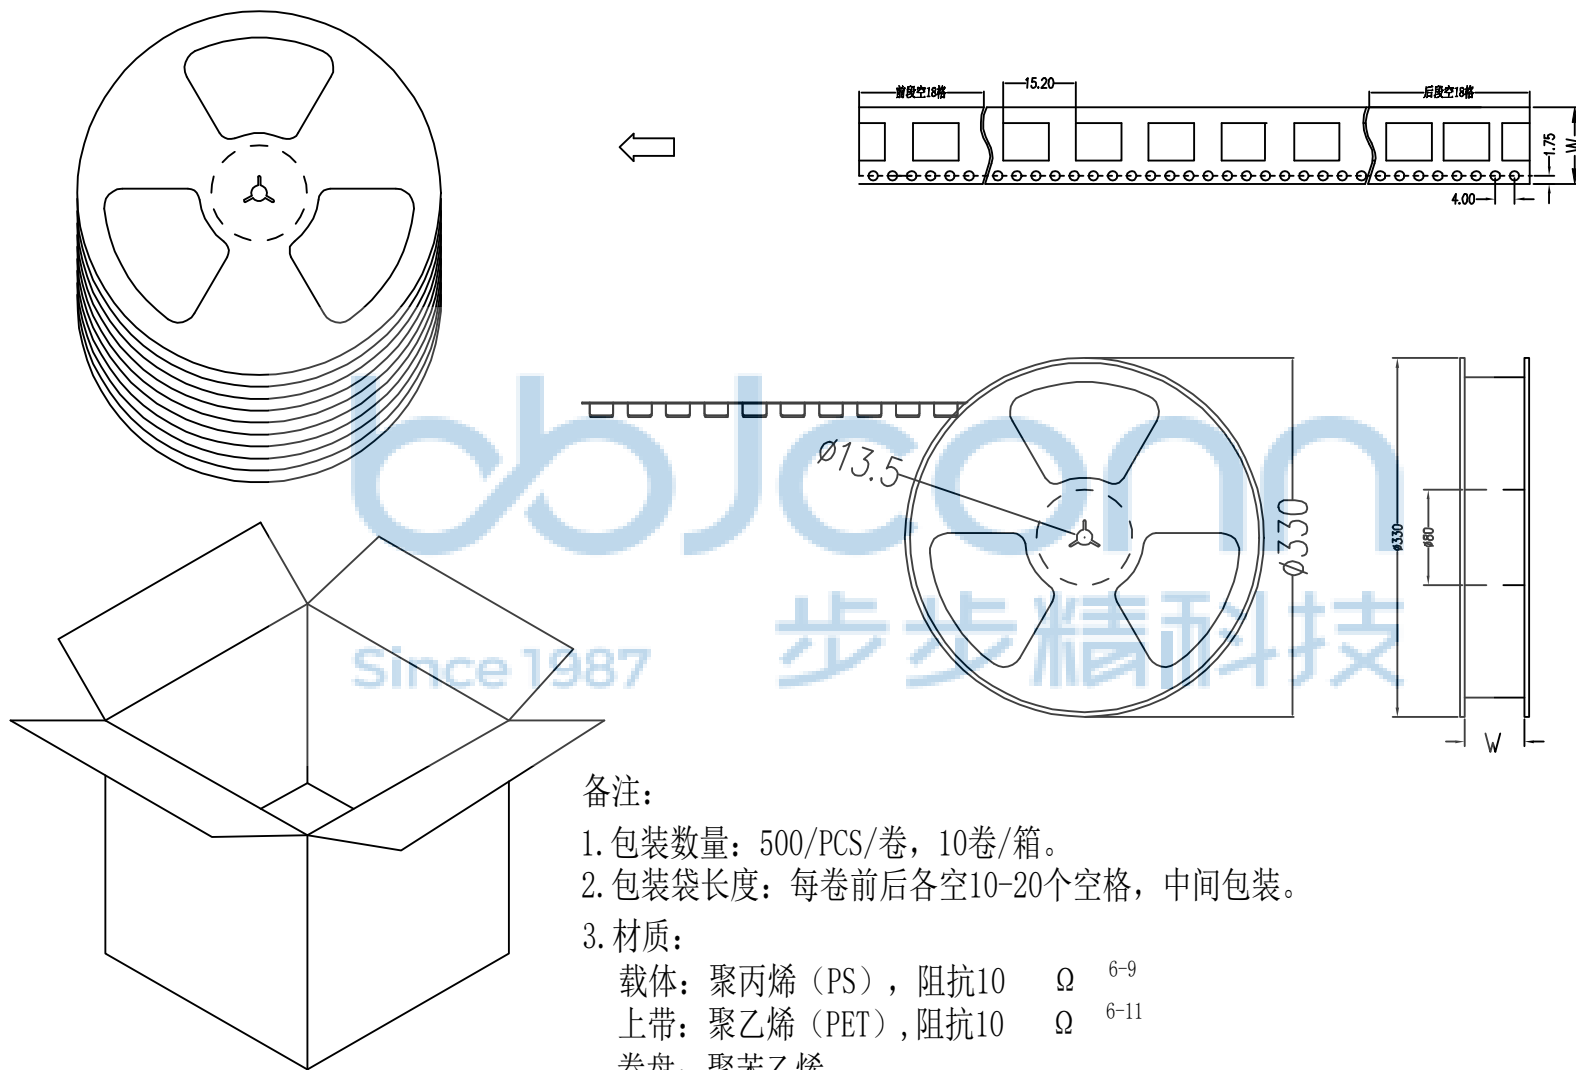

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗10 Ω 6-9
上带: 聚乙烯 (PET), 阻抗10 Ω 6-11
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0536-1		NAME: USB 3.1 AF 90度 外壳四脚DIP 端子DIP 反向沉板3.16 L=15.60 CH=0.3 脚距15.70 平口 不锈钢外壳 镀金足1u 编带	
APPD.	JM_Zheng	PJ. NO.:	127-272-090013-P2G
CHKD.	LYX	SIZE:	A4 DRW NO.:
DR.	SGF	FINISH:	SEE NOTES
		MAT'L:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	2/2