

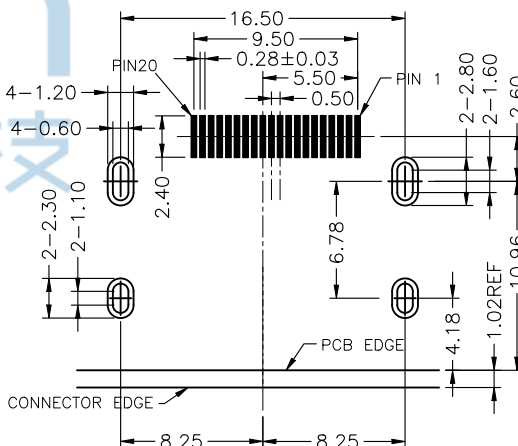
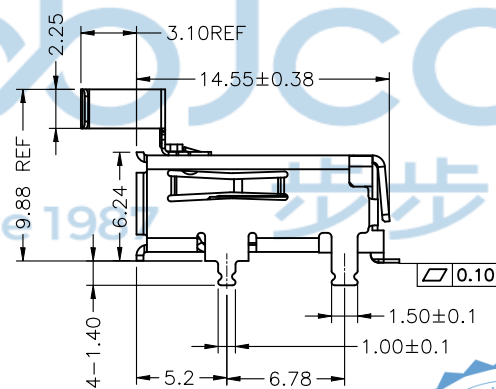
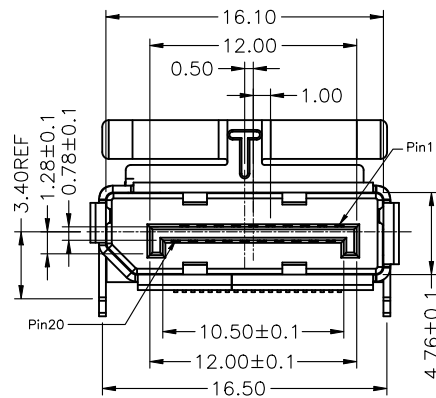
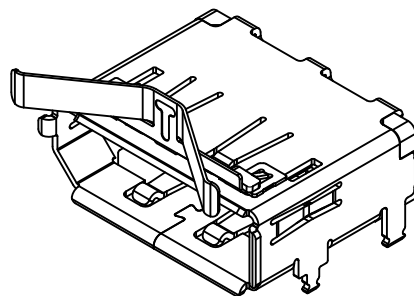
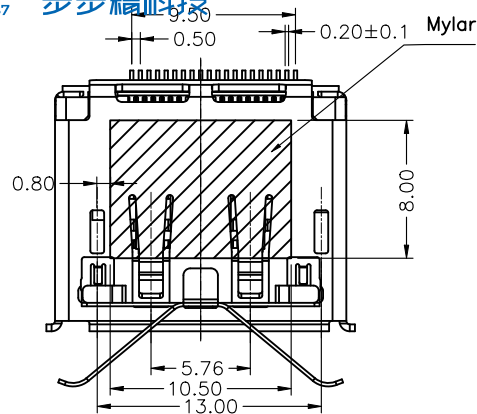




RECOMMENDED P.C.B. LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

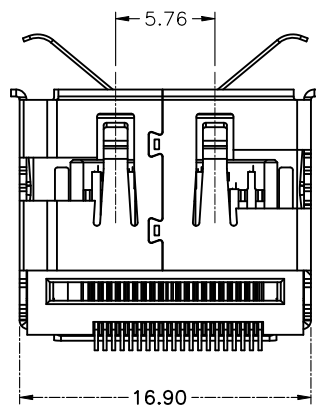

NOTE:

1.Electrical:

- 1.1 RATING CURRENT: 0.5A;
- 1.2 RATING VOLTAGE: 40V;
- 1.3 CONTACT RESISTANCE: 30 mΩ MAX.;
- 1.4 INSULATION RESISTANCE: 100MΩ MIN.;
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE

2. Mechanical:

- 2.1 Mating Force: 4.5Kgf Max.;
- 2.2 Unmating Force: 1.0~4.0Kgf;
- 2.3 DURABILITY: 10000 CYCLES.

3. Environmental





- 3.1 OPERATING TEMPERATURE: -20°C~85°C

旧料号: DP.02.22-03-6005




NO.	DESCRIPTION	MATERIAL	QTY.	REMARK
③	SHIELD	SUS	1	Ni PLATED
②	CONTACT	H62	20	15u"Au /Sn PLATED
①	HOUSING	LCP	1	UL94V-0 / COLOR:BLACK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: XX		深圳市步步精科技有限公司 .X: ±0.38 X*: ±3* .XX: ±0.30 X*: ±1* .XXX: ±0.25 .XX*: ±1*		NAME: DP 弹片款/脚长1.4/无柱 PJ. NO.: 158-221-200009-00G SIZE: A4 DRW NO.: CC23-0008 FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
APPD.	JM_Zheng2023/08/08	CHKD.	DAX 2023/08/08	DR.	King 2023/08/08

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2022 11/08	

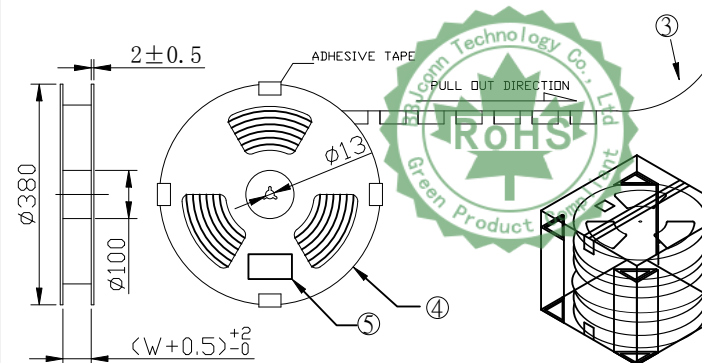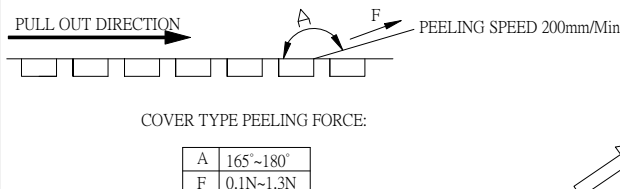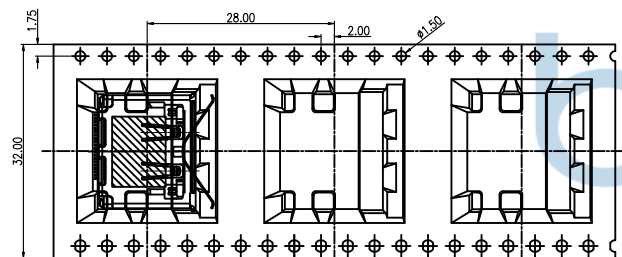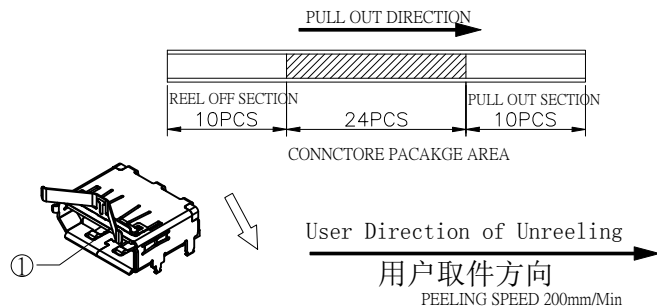

图二

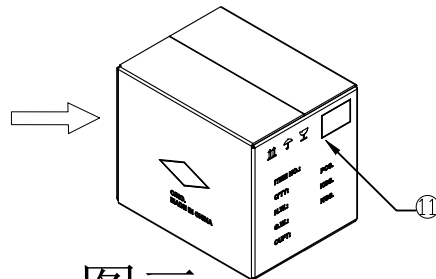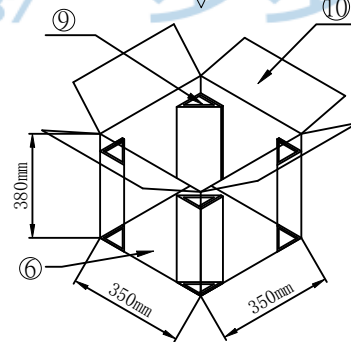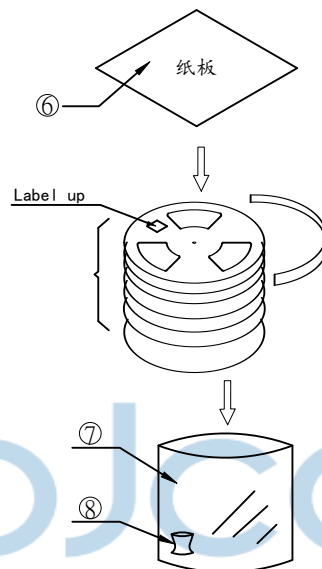

图三

- 一、包装方式：
每料盘封装240PCS产品（图1），10盘（叠放方式见图2）
装一箱（图3）。
- 二、包装数量：
240pcsX10盘=2400pcs
- 三、产品单重:2.28g，净重5.472Kg，包装材料毛重4.6Kg，总重
10.072±1Kg。
- 四、存储条件：温度-40℃~85℃ 湿度<85%RH
- 五、我司保存期限：6个月
- 六、料件使用期限：12个月
- 七、最小包装以及外包装盒都应有RoHS标签或标识。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: DP 普通平口款/脚长1.4/无柱			
APPD. JM_Zheng		CHKD. HongGuang		PJ. NO.: 158-221-200009-00G			
PDWG.NO: 9999-9		DR. LYX		SIZE: A4 DRW NO.: CC23-0008			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2			