

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

1. MATERIAL

CONTACTS: COPPER ALLOY (T=0.20mm)

SHELL: SPCC OR COPPER ALLOY (T=0.30mm)

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.

2. ELECTRICAL PERFORMANCE

CONTACT RESISTANCE: 30MΩ MAX

CONTACT CURRENT RATING: 1.5 AMPERES

DIELECTRIC WITHSTAND VOLTAGE, 500V R.M.S

INSULATION RESISTANCE: 100MΩ MIN

OPERATING TEMPERATURE: -40° C~+85° C.

3. MECHANICAL PERFORMANCE

INSERTION FORCE: 3.5kgf Max

REMOVAL FORCE: 1.02kgf Min

DURABILITY: 1000 CYCLES.

4. PLATING SPECIFICATION:

CONTACTS: GOLD PLATED ON CONTACT AREA, Sn ON SOLDER AREA, NICKEL UNDERPLATED.

SHELL: BRIGHT NICKEL PLATING OVER ALL,


NICKEL MUST BE SOLDABILITY.

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0 .








Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO:	0100-2	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* X*: ±2* X*: ±1*
APPD.	JM_Zheng	NAME: USB 2.0 AF 短体 L=11.05 沉板1.9 端子SMT 平口 LCP黑胶 铁壳 光面 (小米) (金鹏编带)	
CHKD.	LYX	PJ. NO.: UB.01.32-11-1006 SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

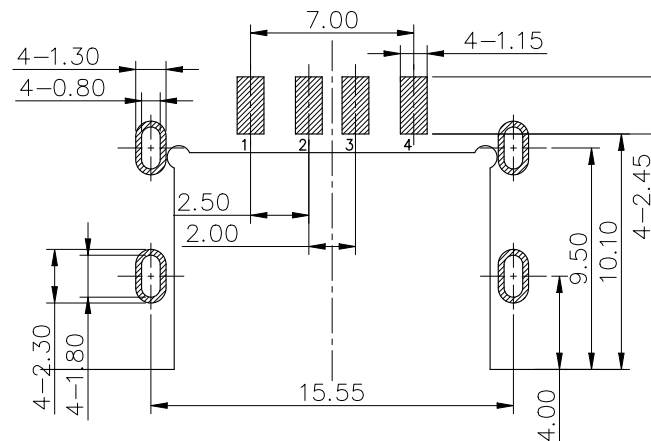

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

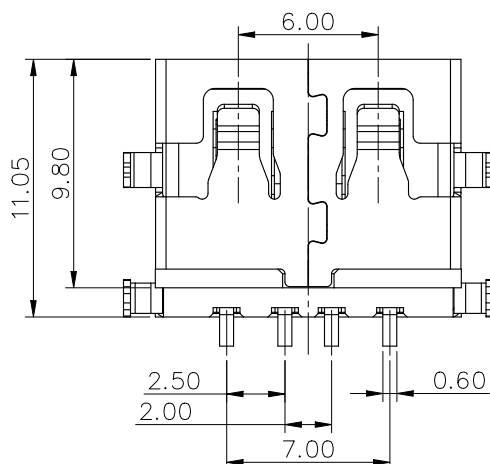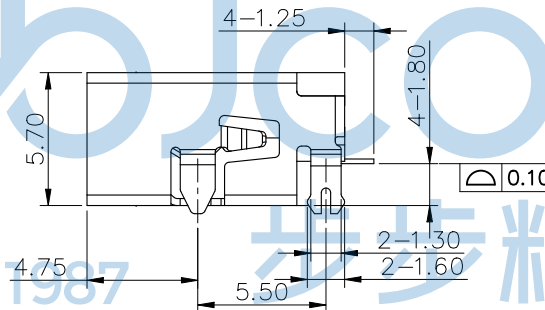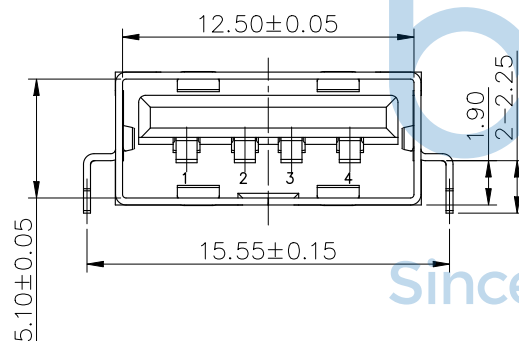

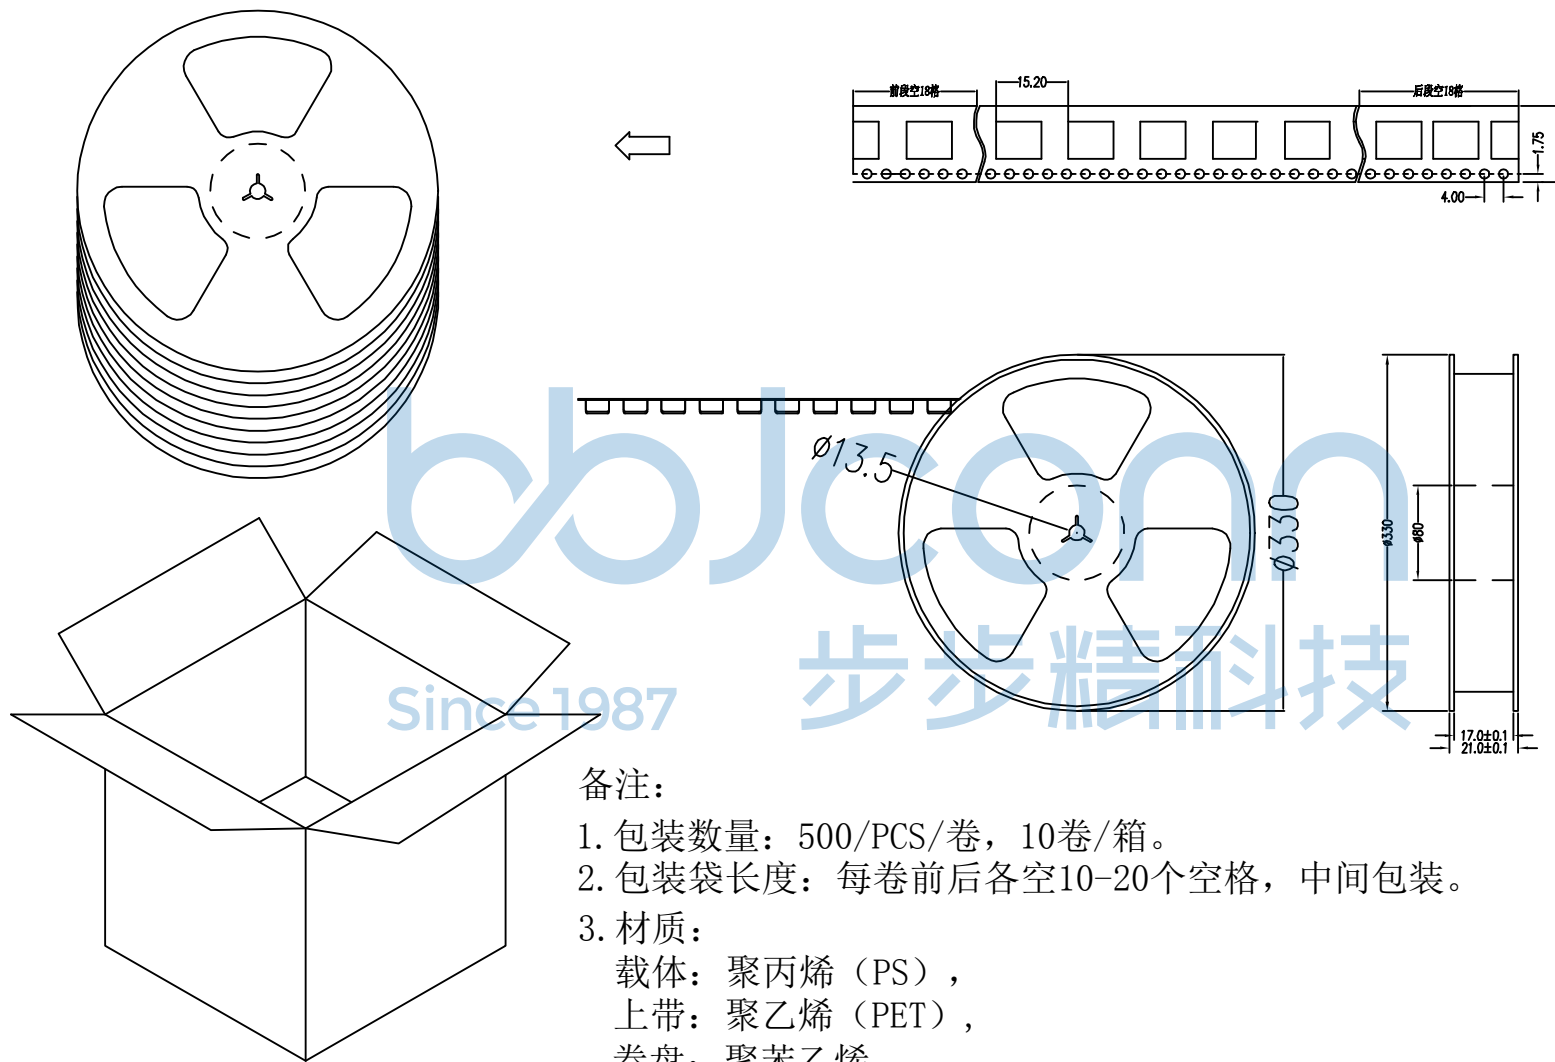

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: USB 2.0 AF 短体 L=11.05 沉板1.9 端子SMT 平口 LCP黑胶 铁壳 光面 (小米) (金鹏编带)	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		APPD. JM_Zheng	
PDWG.NO: 0100-2		CHKD. LYX		DR. TSP	
				PJ. NO.: UB.01.32-11-1006	
				SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	