

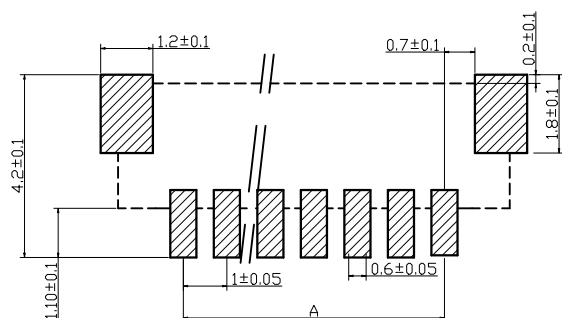
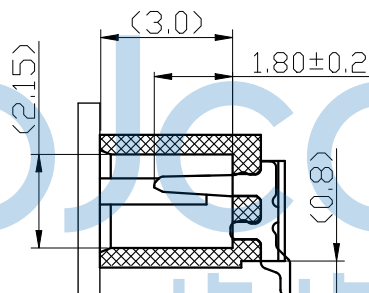
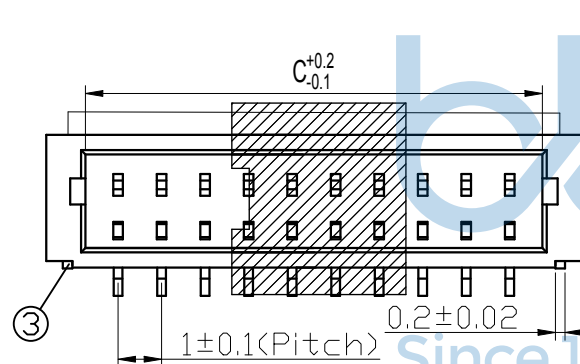
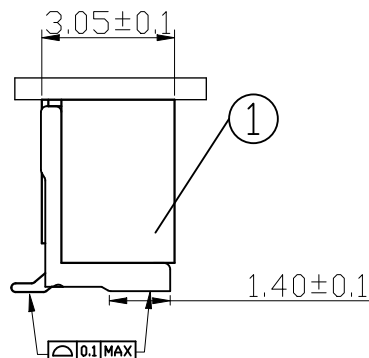


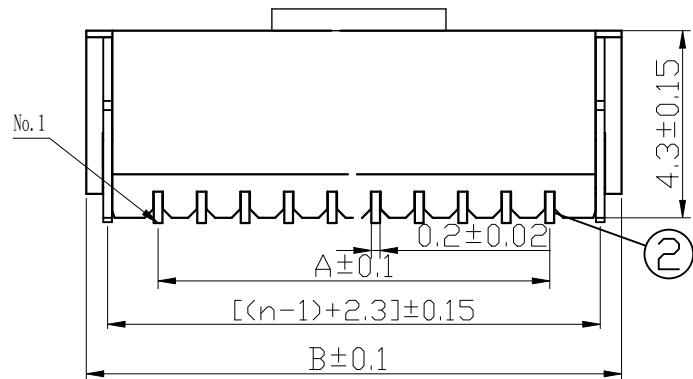

1.0LT-nP PCB寸法  
PCB Layout

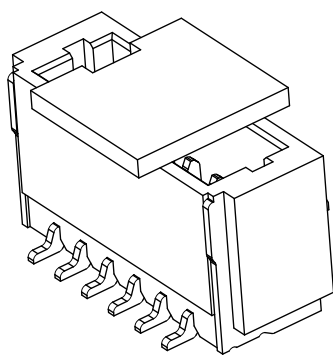

| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | TSP      |

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: -25° C~+85° C;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: ≤0.02 Ω;
- 5、绝缘电阻: ≥100M Ω;
- 6、耐压: 500V, AC/minute.

| 孔位<br>poles | A  | B    | C    |
|-------------|----|------|------|
| 2           | 1  | 4.3  | 2.4  |
| 3           | 2  | 5.3  | 3.4  |
| 4           | 3  | 6.3  | 4.4  |
| 5           | 4  | 7.3  | 5.4  |
| 6           | 5  | 8.3  | 6.4  |
| 7           | 6  | 9.3  | 7.4  |
| 8           | 7  | 10.3 | 8.4  |
| 9           | 8  | 11.3 | 9.4  |
| 10          | 9  | 12.3 | 10.4 |
| 11          | 10 | 13.3 | 11.4 |
| 12          | 11 | 14.3 | 12.4 |
| 13          | 12 | 15.3 | 13.4 |
| 14          | 13 | 16.3 | 14.4 |
| 15          | 14 | 17.3 | 15.4 |
| 16          | 15 | 18.3 | 16.4 |
| 17          | 16 | 19.3 | 17.4 |
| 18          | 17 | 20.3 | 18.4 |
| 19          | 18 | 21.3 | 19.4 |
| 20          | 19 | 22.3 | 20.4 |



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG,NO: 0510-1



深圳市步步精科技有限公司

.X: ±0.38 X\*: ±3\*  
.XX: ±0.25 .X\*: ±2\*  
.XXX: ±0.13 .XX\*: ±1\*

NAME: 针座 1.0-2P 立贴 加盖 米黄色

APPD. JM\_Zheng

PJ. NO.: 123-244-020001-Y3G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


| 3  | 焊片 Fitting Nail | 磷青铜 Phosphor Bronze | 2   | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN. |
|----|-----------------|---------------------|-----|------------------------------------|
| 2  | 端子 Contact      | 磷青铜 Phosphor Bronze | n*1 | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN. |
|    | 基座 Wafer        | LCP(U94V-0)         | 1   | 本色                                 |
| 序号 | 名称              | 材料                  | 数量  | 附注                                 |







| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | TSP      |

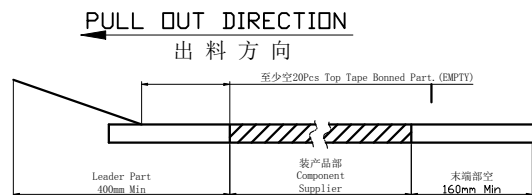



载带带头及带尾尺寸  
Lead tape length



载带上下带剥离强度: 0.1N--1.3N(10g~130g)  
Peeling off force of top tape:  
0.1N--1.3N(10g~130g)

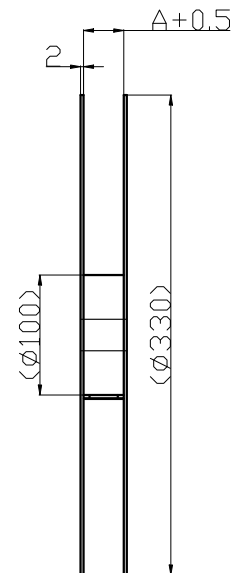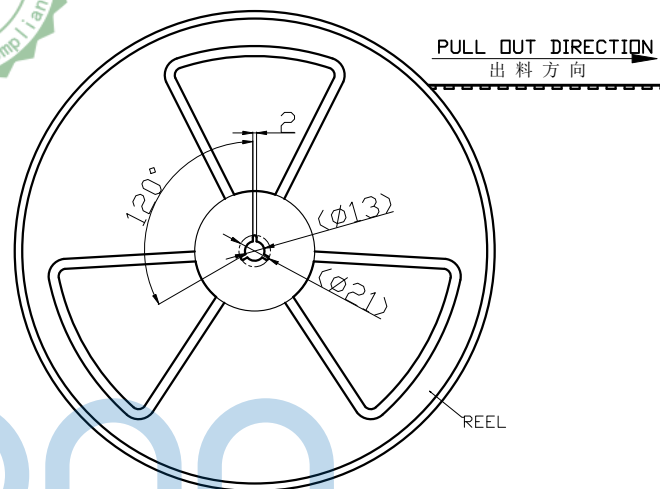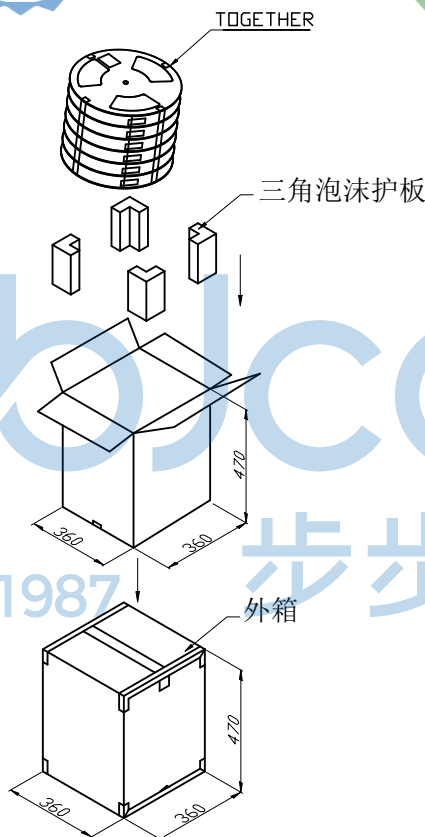

宽度:16mm/24mm 载带

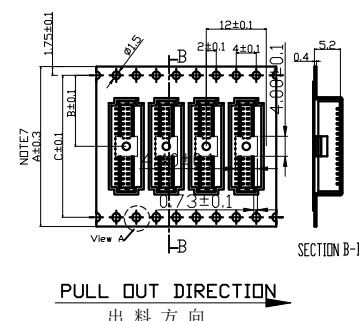

Note:

- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ .(Accumulative Pitch  $\pm 0.2$ )
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness:0.4 $\pm$ 0.1mm.
- 5.Material of top fape:PET,PE,PEF
- 6.Material of carrier fape:Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A)32mm and 44mm pilot holes are provided on both sides.

| 芯数 Pin (n) | 尺寸 A | 尺寸 B | 尺寸 C |
|------------|------|------|------|
| 2-6        | 16.0 | 7.5  | ---  |
| 7-14       | 24.0 | 11.5 | ---  |
| 15-16      | 32.0 | 14.2 | 28.4 |

| 1. 0WT-nP  |             |    |    |    |
|------------|-------------|----|----|----|
| REEL WIDTH | 16          | 24 | 32 | 44 |
| PCS/REEL   | 1500        |    |    |    |
| CTN. SIZE  | 360*360*470 |    |    |    |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0510-1

**深圳市步步精科技有限公司**

|                                                       |          |                                                 |  |                           |  |
|-------------------------------------------------------|----------|-------------------------------------------------|--|---------------------------|--|
| .X: $\pm 0.38$<br>.XX: $\pm 0.25$<br>.XXX: $\pm 0.13$ |          | X': $\pm 3'$<br>X'': $\pm 2'$<br>X'X': $\pm 1'$ |  | NAME: 针座 1.0-2P 立贴 加盖 米黄色 |  |
| APPD.                                                 | JM_Zheng | PJ. NO.: 123-244-020001-Y3G                     |  | SIZE: A4 DRW NO.:         |  |
| CHKD.                                                 | LYX      | FINISH: SEE NOTES                               |  | MAT'L.: SEE NOTES         |  |
| DR.                                                   | TSP      | SCALE: N/A                                      |  | REV.: A0 UNIT: mm         |  |
|                                                       |          |                                                 |  | PAGE: 2/2                 |  |