

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

1.MATERIAL:

- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;
- 1.2 CONTACT: COPPER ALLOY(T=0.2mm)
- 1.3 SHELL: SPCC(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS;

- 2.1 CONTACT RESISTANCE: 30m MAX.
- 2.2 CONTACT CURRENT RATING: 1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS M
- 2.5 OPERATING TEMPERATURE: -55°C~85°C
- 2.6 RATE VOLTAGE: 30V DC

3 MECHANICAL CHARACTERISTICS:


- 3.1 MATING FORCE: SEE NOTE.
- 3.2 UNMATED FORCE: 35 N Max
- 3.3 DURABILITY: 5,000 CYCLES

4.PLATING


- 4.1 TERMINAL CONTACT: GOLD PLATING ALL OVER
50u" MIN NICKEL AND 80u" MIN Matte Tin
NICKEL IN SOLDER AREA (SEE TAB)
- 4.2 SHELL: 50u" MIN. NICKEL ALL OVER



拔出力 要求	是否有凸包
拔出力 10~35N	外壳背面有凸包
拔出力 9~15N	外壳背面无凸包

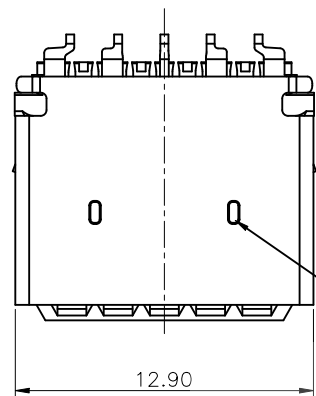





依需求是
否带凸包

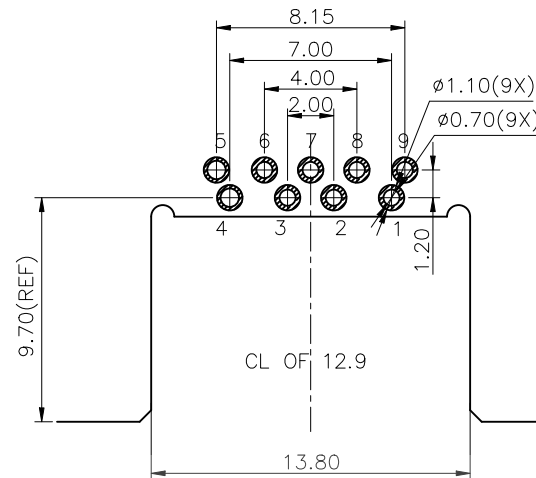

RECOMMENDED PCB LAYOUT(TOP VIEW)

DEFAULT TOLERANCE: ±0.05

PCB EDGE

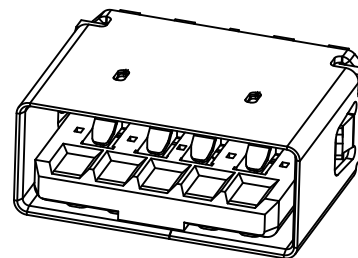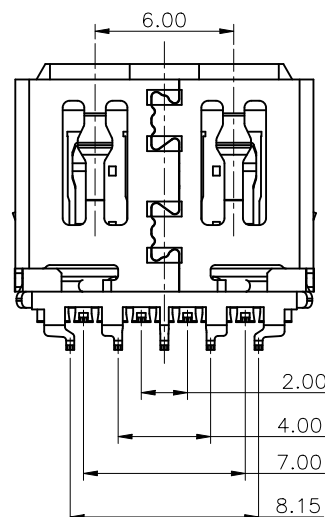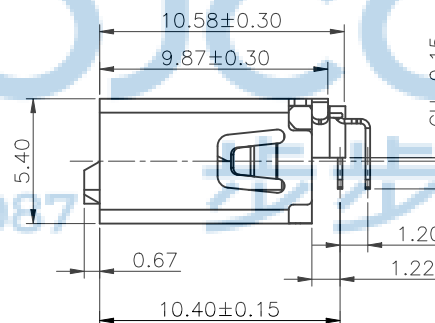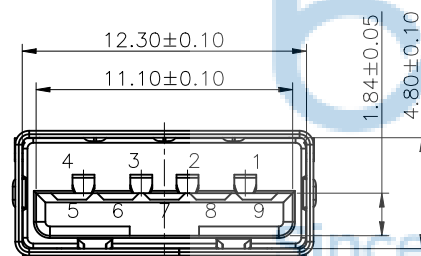

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.

Corporation AND SHOULD
NOT BE USED IN WHOLE

OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0886-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:

USB 3.0 AF 90度 反向沉板 舌片外露0.67 端子DIP L=9.87
CH=0.15 平口 外壳无脚 端子脚长1.35 背面带凸包 铁壳 编带

APPD. JM_Zheng

CHKD. LYX

DR. SGF



PJ. NO.: 127-272-090008-K4G

SIZE: A4 DRW NO.:





FINISH: SEE NOTES

MAT'L: SEE NOTES

SCALE: N/A

REV.: A0 UNIT: mm

PAGE: 1/2

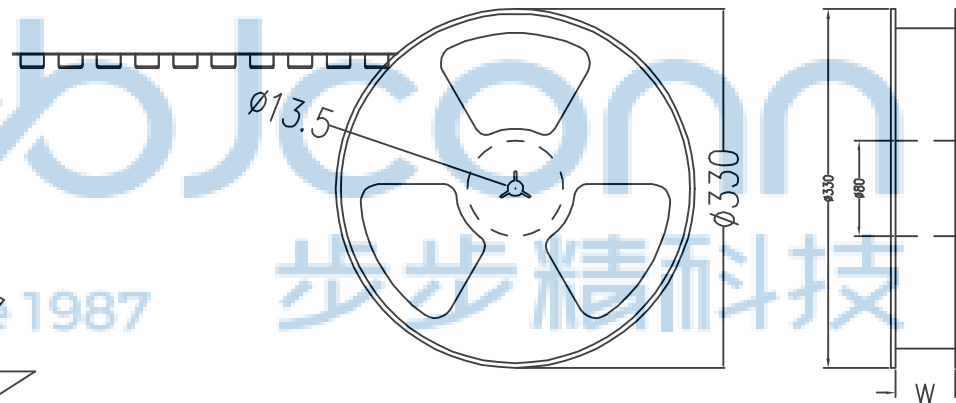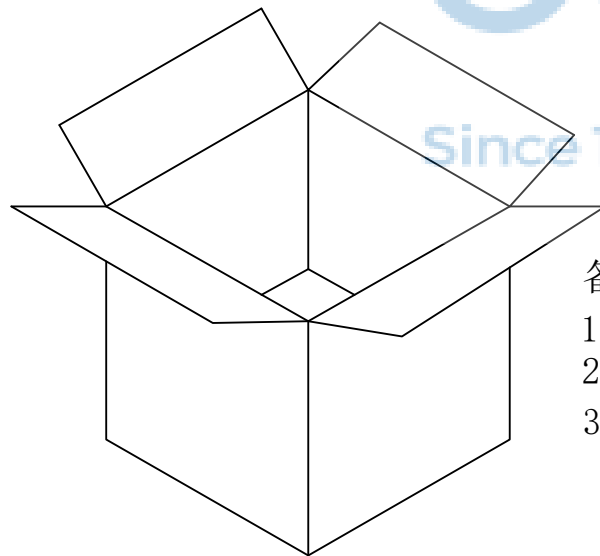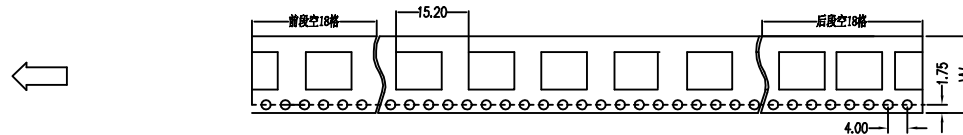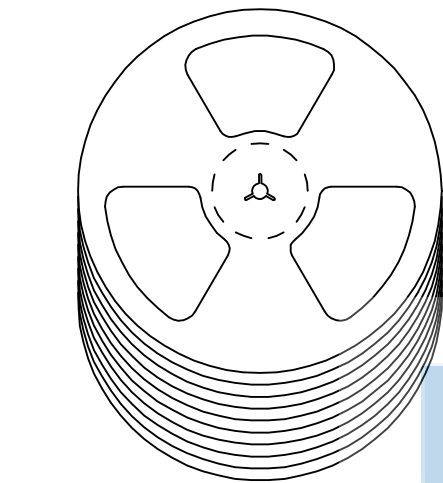

备注:

- 包装数量: 400/PCS/卷, 8卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: USB 3.0 AF 90度 反向沉板 舌片外露0.67 端子DIP L=9.87 CH=0.15 平口 外壳无脚 端子脚长1.35 背面带凸包 铁壳 编带	
.X': $\pm 3'$.X'': $\pm 2'$.X''': $\pm 1'$		PJ. NO.: 127-272-090008-K4G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0886-1		MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A	
		REV.: A0	
		UNIT: mm	
		PAGE: 2/2	