






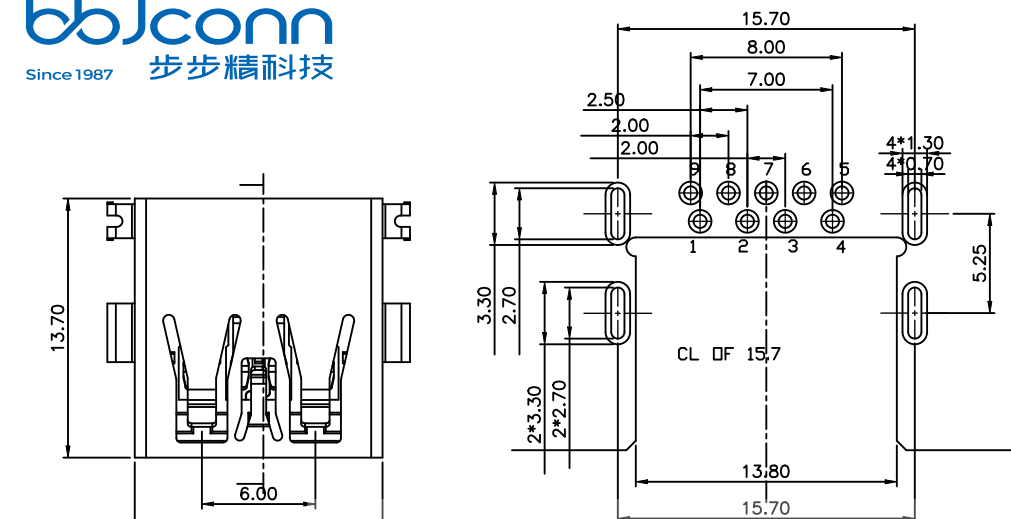


TOLERANCE: ± 0.05 , THICKNESS: 1.2mm


RECOMMENDED PCB LAYOUT

(TOP VIEW)

KEEP OUT AREA

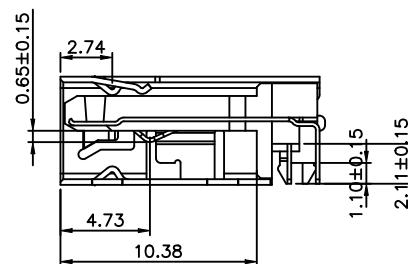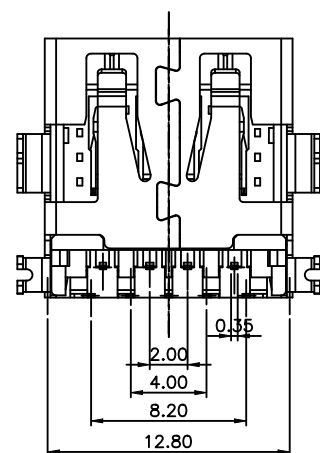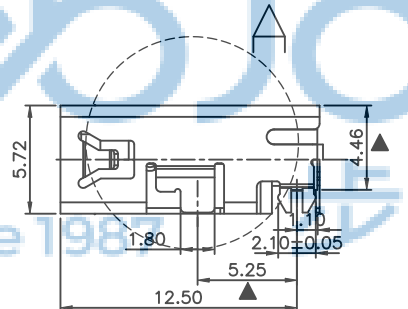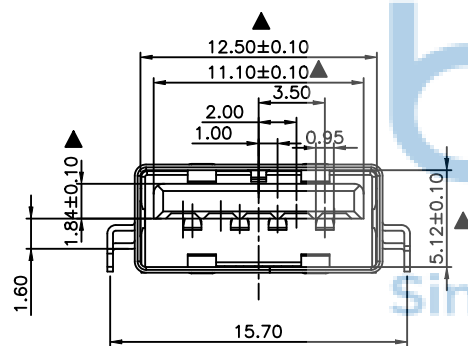

SECTION A-A



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTE:

1. MATERIAL:

- 1.1 INSULATOR: 塑胶9T PLASTIC UL 94 V-0;BLUE
- 1.2 CONTACT:C5191-H(T=0.20mm)
- 1.3 SHELL:SUS201(T=0.30mm)

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
- 2.4 INSULATION RESISTANCE 1000 MEGOHMS Min

3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
- 3.3 DURABILITY:5,000 CYCLES

4. PLATING





- 4.1 TERMINAL CONTACT:(SEE TAB) GOLD PLATING ALL OVER
50u" MIN NICKEL AND 100u"MIN MATTE Tin ALL OVER 50u"
MIN NICKEL ON SOLDER AREA
- 4.2 SHELL:50u"MIN. NICKEL ALL OVER

5. PART NUMBER:



Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0471-1		深圳市步步精科技有限公司	
.X: ± 0.38	X': $\pm 3'$	NAME: USB 3.0 AF L=13.70 沉板1.16 四脚插		PJ. NO.: UB.03.32-33-W001	
.XX: ± 0.25	.X': $\pm 2'$	端子DIP 平口 PA9T蓝胶 不锈钢外壳		SIZE: A4 DRW NO.:	
.XXX: ± 0.13	.XX': $\pm 1'$	APPD.	JM_Zheng	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		CHKD.	LYX	SCALE: N/A	REV.: A0
		DR.	TSP	UNIT: mm	PAGE: 1/2

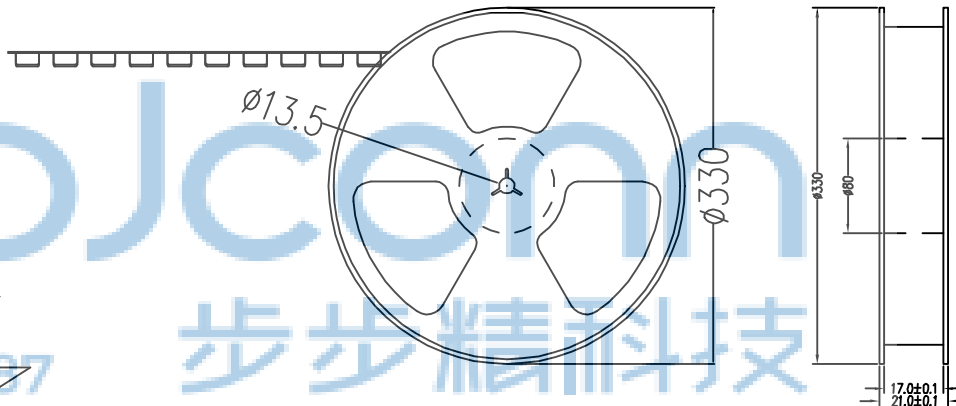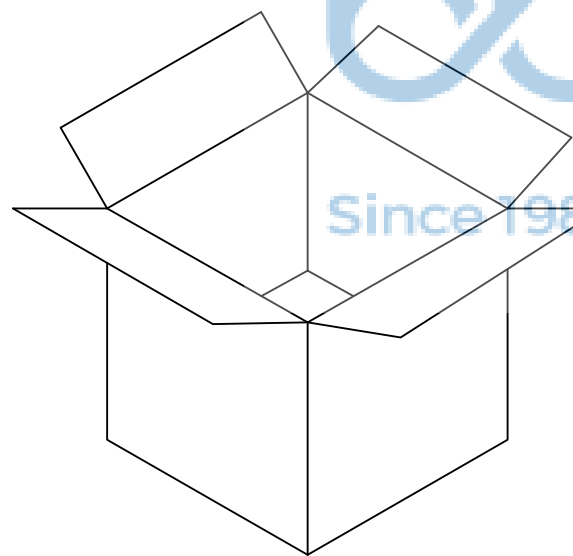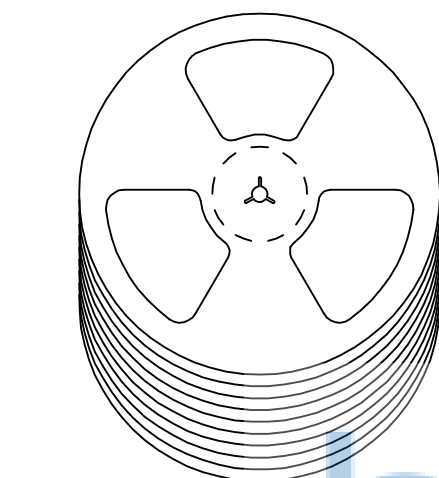

备注:

1. 包装数量: 450/PCS/卷, 9卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: USB 3.0 AF L=13.70 沉板1.16 四脚插 端子DIP 平口 PA9T蓝胶 不锈钢外壳	
APPD.	JM_Zheng	PJ. NO.: UB.03.32-33-W001	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0471-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	