








REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

MATERIAL:
HOUSING: LCP,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
G/FU" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20~50U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

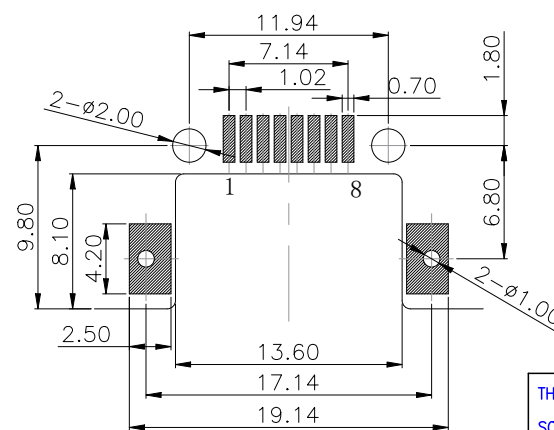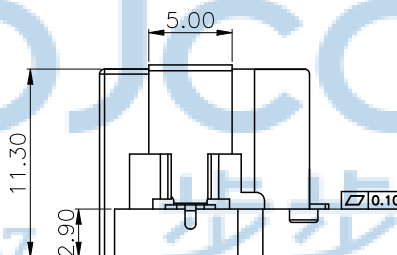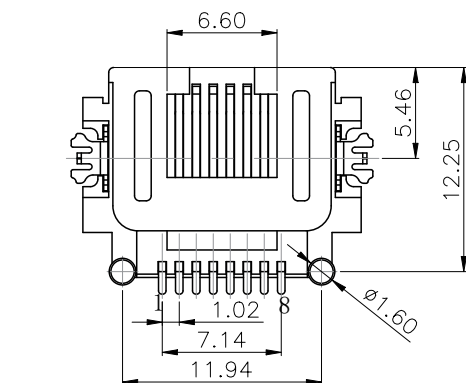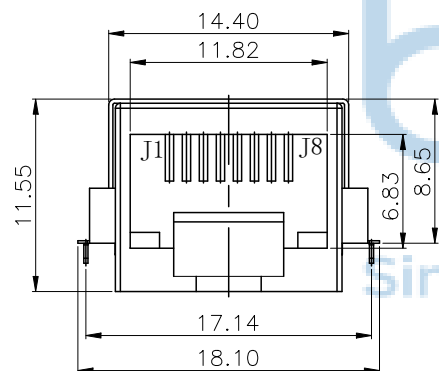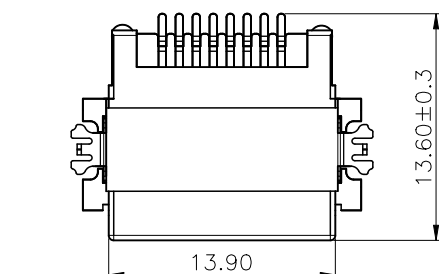

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE




1	○	○	J1
2	○	○	J2
3	○	○	J3
4	○	○	J4
5	○	○	J5
6	○	○	J6
7	○	○	J7
8	○	○	J8

PCB SIDE TO PHY

CABLE SIDE




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司						
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"				
	NAME: 网络接口 RJ45 1X1 8P8C 90度 无灯无弹 带柱 沉板2.9 L=12.60 SMT 半包 编带							
	APPD	JM_Zheng				PJ NO: 131-2K1-080002-Y7G		
	CHKD	LYX				SIZE:A4	DRW NO:	
PDWG NO: 0521-1	DR	SGF			FINISH:SEE NOTES		MAT'L:SEE NOTES	
					SCALE:N/A	REV:A0	UNIT:mm	PAGE:1 / 2

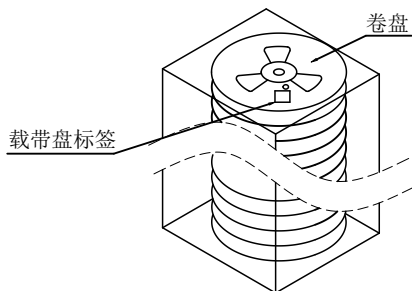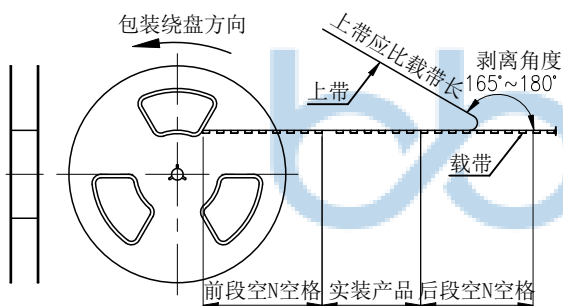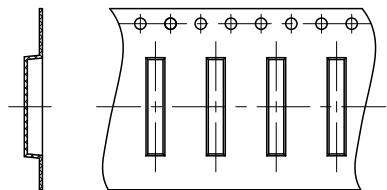

备注:

- 1、包装数量: 400/PCS/卷, 9卷/箱。
- 2、包装袋长度: 每卷前后各空10~20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

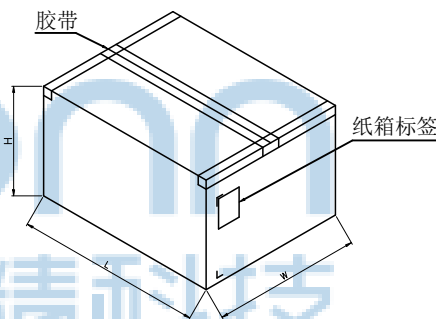

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$
APPD	JM_Zheng	NAME: 网络接口 RJ45 1X1 8P8C 90度 无灯无弹 带柱 沉板2.9 L=12.60 SMT 半包 编带	
CHKD	LYX	PJ NO: 131-2K1-080002-Y7G	
PDWG NO: 0521-1		DR	SGF
		SCALE: N/A	REV: A0
		UNIT: mm	PAGE: 2/2