

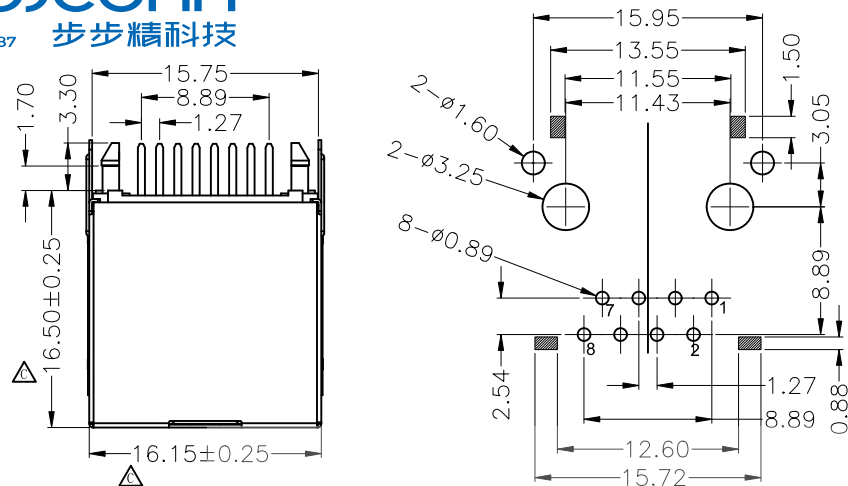
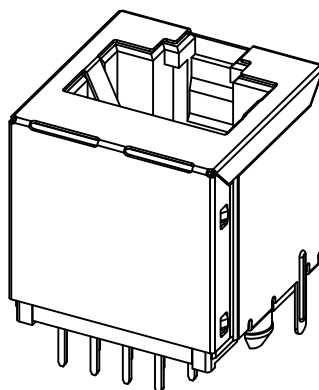
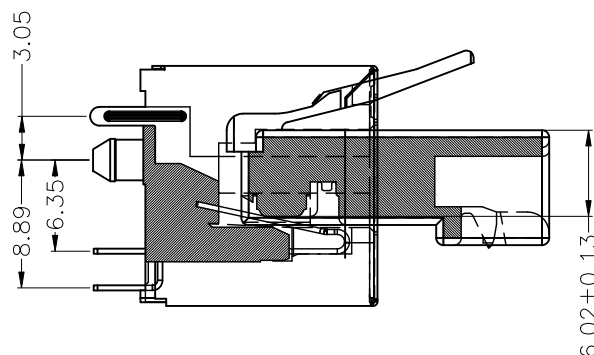



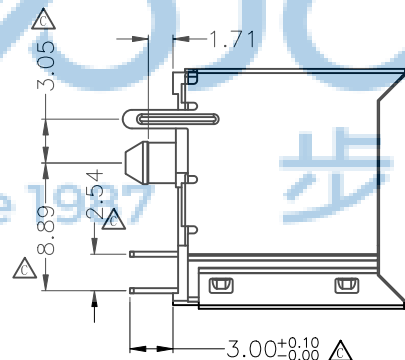

RECOMMEND PCB LAYOUT VIEW (COMPONENT SIDE)
THICKNESS=1.60mm (ALL TOLERANCE =±0.05)

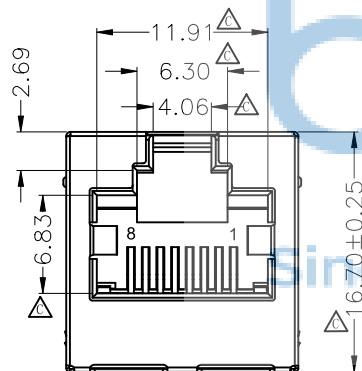

Note:

1. MATERIAL:

- 1-1. HOUSING&INSERT MATERIAL: LCP UL94V-0 BLACK
- 1-2. CONTACT MATERIAL: COPPER ALLOY T=0.35mm.
- 1-3. SHELL: COPPER ALLOY, T=0.20mm.

2. PLATING:

- 2-1. TERMINAL: GOLD PLATING AT CONTACT AREA
NICKEL 30U"MIN. TIN FEET PLATING GOLD FLASH
- 2-2. SHELL: BRASS, T=0.20mm.
30U" NICKEL PLATING OVERALL

3. ELECTRICAL:

- 3-1. CONTACT CURRENT RATING : 1.5A
- 3-2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC OR 1500V DC RMS AT 0.50mA 50 Hz/60Hz FOR 1MINUTE
- 3-3. CONTACT RESISTANCE: 40 m OHMS MAX.


4. MECHANICAL:

- 4-1. MATING/UNMATING FORCE: 30N/3.06KG MAX.
- 4-2. OPERATING LIFE: 750 CYCLES MIN.
- 4-3. RETENTION STRENGTH: 50N MIN FOR 60S±5S.




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0642-1


深圳市步步精科技有限公司		NAME: 网络接口 RJ45 1x1 8P8C 180度 H=16.50 无灯 无弹 前脚3.05 全包 带柱 扁针 DIP 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" X'': ±2" X'X': ±1"	APPD. JM_Zheng CHKD. TSP DR. LYX	PJ. NO.: 131-2K5-080004-Y6G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/2




(图1)

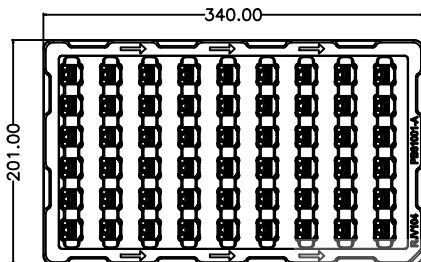


(图2)



(图3)



(图4)




(图5)

顶部底部加纸板


1个防潮袋

2包干燥剂


拉伸膜

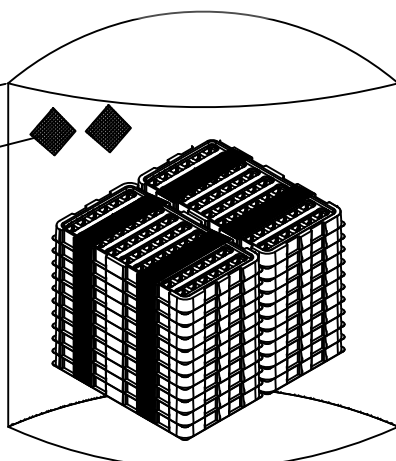

(图6)

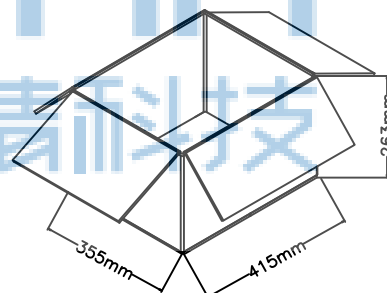

(图7)

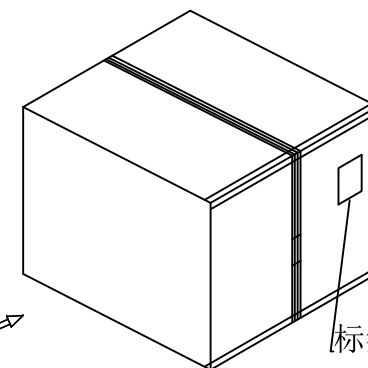

(图8)

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

操作步骤:

1. 将产品(图1) 按照图示方向放入吸塑盒内(图2);
2. 堆叠11盒装好产品的吸塑,
- 然后在顶部和底部各加一片纸板。(图3);
4. 取两摞产品(图4) 分别用拉伸膜缠绕(图5);
5. 将两摞产品放入防潮袋, 并放入2包干燥剂;
6. 按图所示装入纸箱(图7),
- 然后将产品装入纸箱内;
7. 封箱并贴标签(图8);
8. 栈板摆放不可超过5层;

包装数量:

1. 整盘包装数量: 54pcs/盒
2. 整箱数量: 1188pcs/盒, 即(22盒)

重量:

1. 产品净重(P. N. W.): 6.88KG (1188pcs)
3. 整箱毛重 (G. W.): 9.29KG

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: 网络接口 RJ45 1x1 8P8C 180度 H=16.50 无灯 无弹 前脚3.05 全包 带柱 扁针 DIP 盒装	
APPD. JM_Zheng	CHKD. TSP	PJ. NO.:131-2K5-080004-Y6G	
DR. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0642-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2	