






REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

Note:


- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
Underplating: Au/matt Tin overall.
 - Fitting Nail:
Underplating: matt Tin overall.
- Product must comply HF RoHS specification.

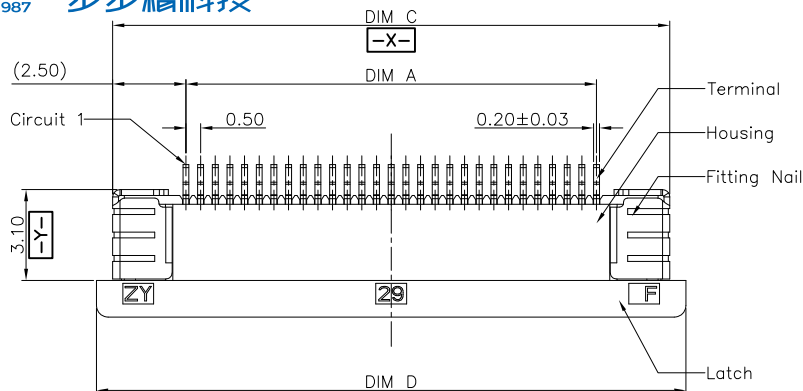

SECTION A-A
SCALE 1:1

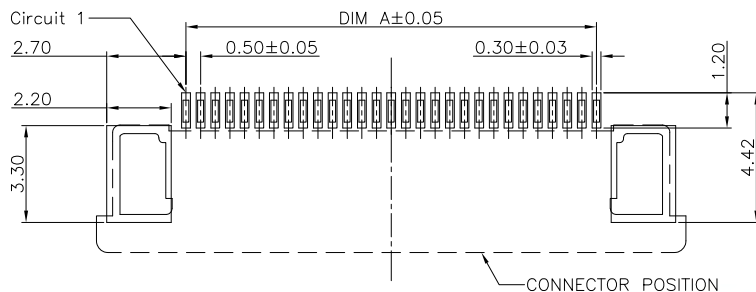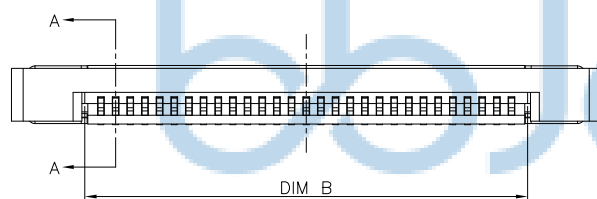

RECOMMENDED P.C.B. PATTERN LAYOUT

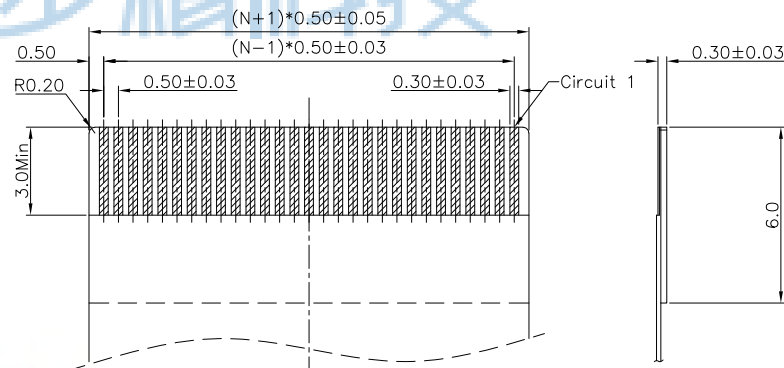

RECOMMENDED FPC/FPC DIMENSION

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
4	1.50	2.60	6.50	7.60		
5	2.00	3.10	7.00	8.10		
6	2.50	3.60	7.50	8.60		
7	3.00	4.10	8.00	9.10		
8	3.50	4.60	8.50	9.60		
9	4.00	5.10	9.00	10.10		
10	4.50	5.60	9.50	10.60		
11	5.00	6.10	10.00	11.10		
12	5.50	6.60	10.50	11.60		
13	6.00	7.10	11.00	12.10		
14	6.50	7.60	11.50	12.60		
15	7.00	8.10	12.00	13.10		
16	7.50	8.60	12.50	14.50		
17	8.00	9.10	13.00	14.10		
18	8.50	9.60	13.50	14.60		
19	9.00	10.10	14.00	15.10	5.20	6.45
20	9.50	10.60	14.50	15.60		
21	10.00	11.10	15.00	16.10		
22	10.50	11.60	15.50	16.60		
23	11.00	12.10	16.00	17.10		
24	11.50	12.60	16.50	17.60		
25	12.00	13.10	17.00	18.10		
26	12.50	13.60	17.50	18.60		
27	13.00	14.10	18.00	19.10		
28	13.50	14.60	18.50	19.60		
29	14.00	15.10	19.00	20.10		
30	14.50	15.60	19.50	20.60		
31	15.00	16.10	20.00	21.10		
32	15.50	16.60	20.50	21.60		
33	16.00	17.10	21.00	22.10		
34	16.50	17.60	21.50	22.60		
35	17.00	18.10	22.00	23.10		
36	17.50	18.60	22.50	23.60		
37	18.00	19.10	23.00	24.10		
38	18.50	19.60	23.50	24.60		
39	19.00	20.10	24.00	25.10		
40	19.50	20.60	24.50	25.60		
41	20.00	21.10	25.00	26.10		
42	20.50	21.60	25.50	26.60		
43	21.00	22.10	26.00	27.10		
44	21.50	22.60	26.50	27.60		
45	22.00	23.10	27.00	28.10		
46	22.50	23.60	27.50	28.60		
47	23.00	24.10	28.00	29.10	5.75	7.00
48	23.50	24.60	28.50	29.60		
49	24.00	25.10	29.00	30.10		
50	24.50	25.60	29.50	30.60		
51	25.00	26.10	30.00	31.10		
52	25.50	26.60	30.50	31.60		
53	26.00	27.10	31.00	32.10		
54	26.50	27.60	31.50	32.60		
55	27.00	28.10	32.00	33.10		
56	27.50	28.60	32.50	33.60		
57	28.00	29.10	33.00	34.10		
58	28.50	29.60	33.50	34.60		
59	29.00	30.10	34.00	35.10		
60	29.50	30.60	34.50	35.60		



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:
FPC 0.5-24P 抽拉下接 H=2.0 编带

APPD. JM_Zheng

PJ. NO.: 130-221-240007-W3G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. GZY


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 24.60METERS.
7. COMPONENT LOAD PER 13" REEL : 2000PCS.
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

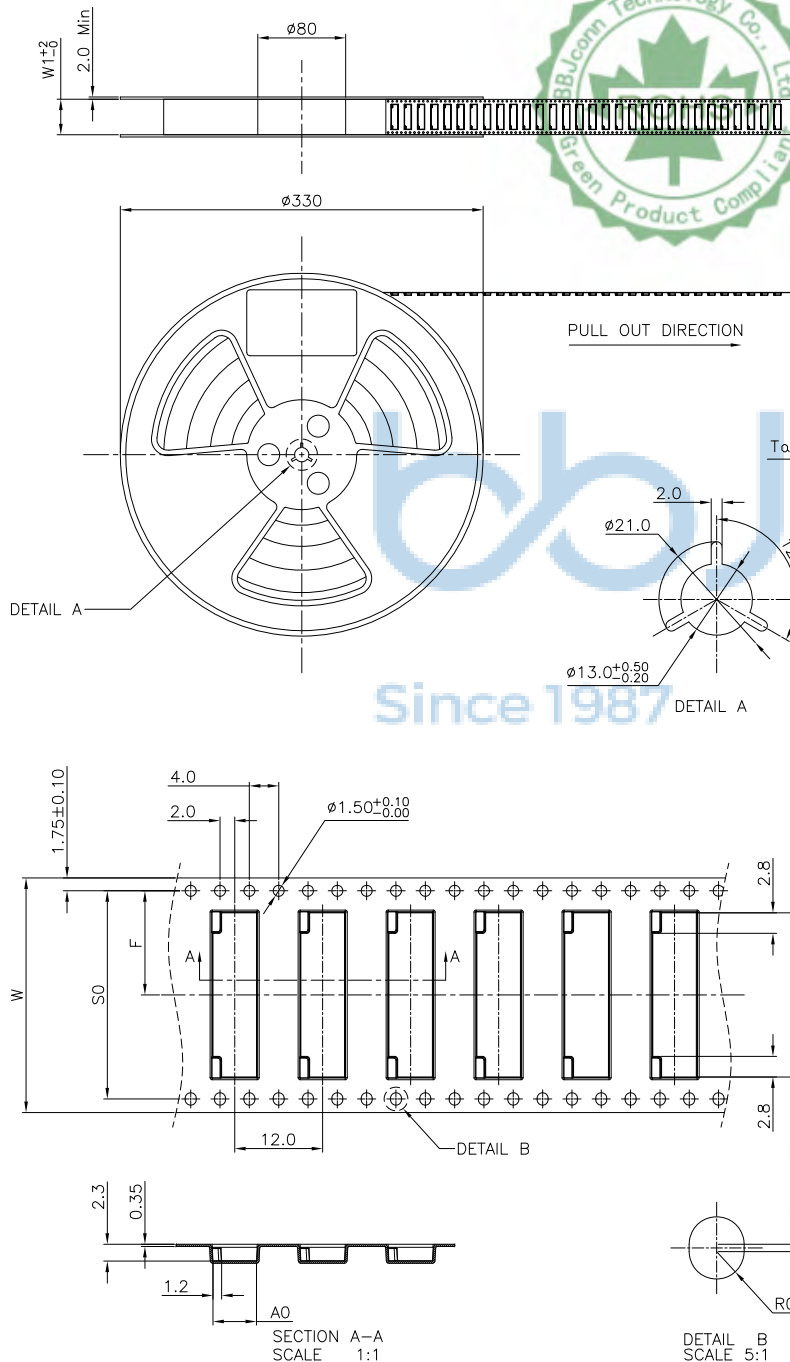

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司
工程
APPD. JM_Zheng
CHKD. LYX
DR. GZY

NAME:
FPC 0.5-24P 抽拉下接 H=2.0 编带
PJ. NO.: 130-221-240007-W3G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2

CKTS For L.0 Pitch Conn.	CKTS For 0.5 Pitch Conn.	B0±0.10	A0±0.10	W	W1	F	S0±0.10
	4	7.90					
	5	8.40					
	6	8.90		16±0.3/-0	16.4	7.5±0.10	
	7	9.40					
	8	9.90					
4	9	10.40					
	10	10.90					
5	11	11.40					
	12	11.90					
6	13	12.40					
	14	12.90					
7	15	13.40		24±0.3/-0	24.4	11.5±0.10	
	16	13.90					
8	17	14.40					
	18	14.90					
9	19	15.40	3.95				
	20	15.90					
10	21	16.40					
	22	16.90					
11	23	17.40					
	24	17.90					
12	25	18.40					
	26	18.90					
13	27	19.40		32±0.30	32.4	14.2±0.10	28.4
	28	19.90					
14	29	20.40					
	30	20.90					
15	31	21.40					
	32	21.90					
12	33	22.40					
	34	22.90					
17	35	23.40					
	36	23.90					
18	37	24.40					
	38	24.90					
19	39	25.40					
	40	25.90					
20	41	26.40					
	42	26.90					
21	43	27.40					
	44	27.90					
22	45	28.40		44±0.30	44.4	20.2±0.15	40.4
	46	28.90	6.50				
23	47	29.40					
	48	29.90					
24	49	30.40					
	50	30.90					
25	51	31.40					
	52	31.90					
26	53	32.40					
	54	32.90					
27	55	33.40					
	56	33.90					
28	57	34.40					
	58	34.90					
29	59	35.40		56±0.30	56.4	26.2±0.15	52.4
	60	35.90					

单边孔



深圳市步步精科技有限公司