
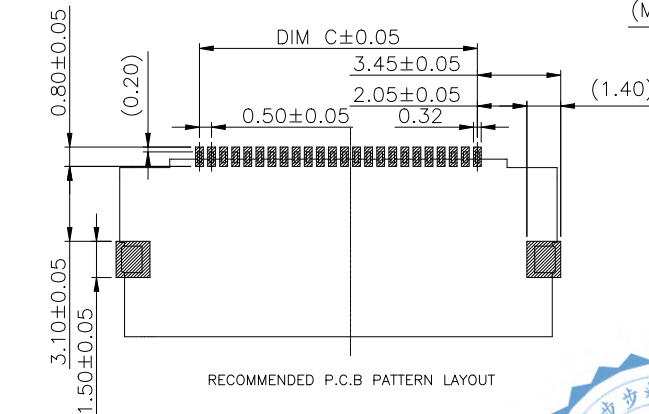
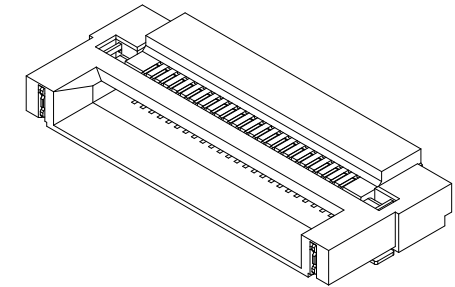
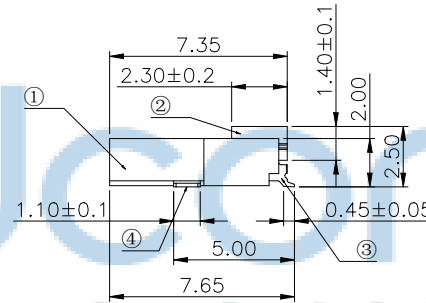
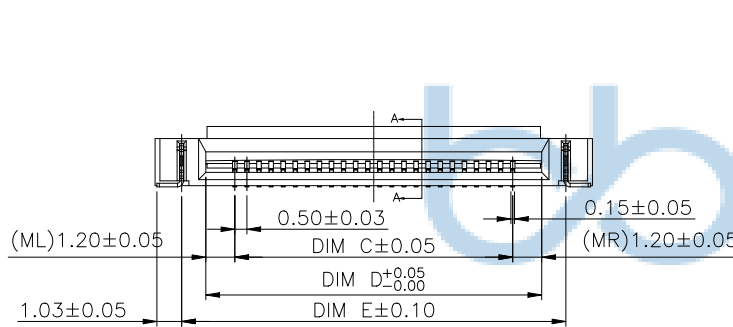
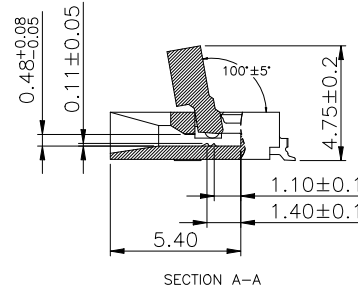



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Notes:

- Material:
 - Housing: thermoplastic high temp. UL94V-0; Color: Natural.
 - Latch: thermoplastic high temp. UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Hold down: copper alloy.
- Finish:
 - Terminal: 50u" Min. Nickel underplated overall. L:4u"Gold on contact and 2u"Gold on solder area.
 - Fitting Nail: 50u" Min. Nickel underplated overall. 100~200u" Min. Matte Tin plated.
- Product must comply HF RoHS specification.
- Margin SPEC: |ML-MR| ≤ 0.05mm

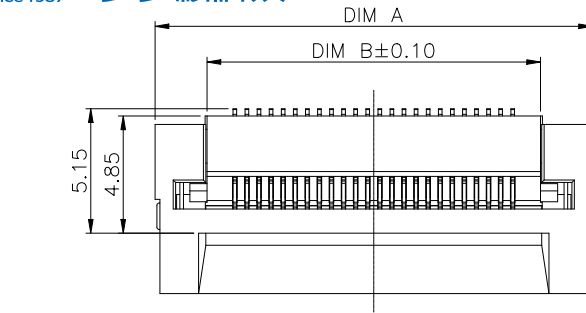

RECOMMENDED P.C.B PATTERN LAYOUT

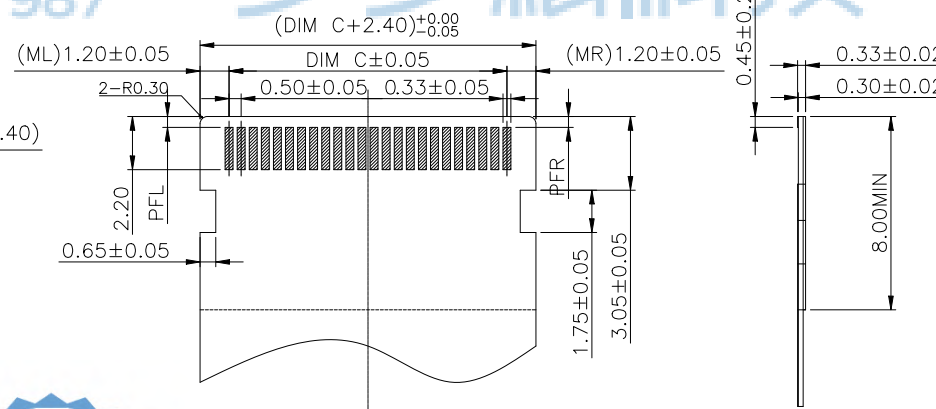

RECOMMENDED FPC/FFC DIMENSION

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
24	18.10	13.80	11.50	13.90	15.90
96	54.10	49.80	47.50	49.90	51.90



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1






深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°	NAME: FPC 0.5-24P 翻盖下接 H=2.5 编带 (AF534)
APPD JM_Zheng	CHKD LYX	PJ NO: 130-221-240013-W3G
DR SGF	SCALE: N/A	SIZE: A4
	REV: A0	DRW NO:
	UNIT: mm	MAT'L: SEE NOTES
	PAGE: 1/2	

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: WHITE
REEL-PS/CARRIER TAPE-PS/COVER TAPE-PET.
5. IT IS THERMAL WELDING FOR CONNECTOR POST PACKAGING METHOD
6. THICKNESS: 0.30 ± 0.05 mm.
7. PACKING LENGTH PER 15" REEL : 31.20METERS.
8. COMPONENT LOAD PER 15" REEL : 1900PCS.
9. PEELING OFF FORCE OF TOP TAPE 0.2N~0.7N(20gf~70gf).

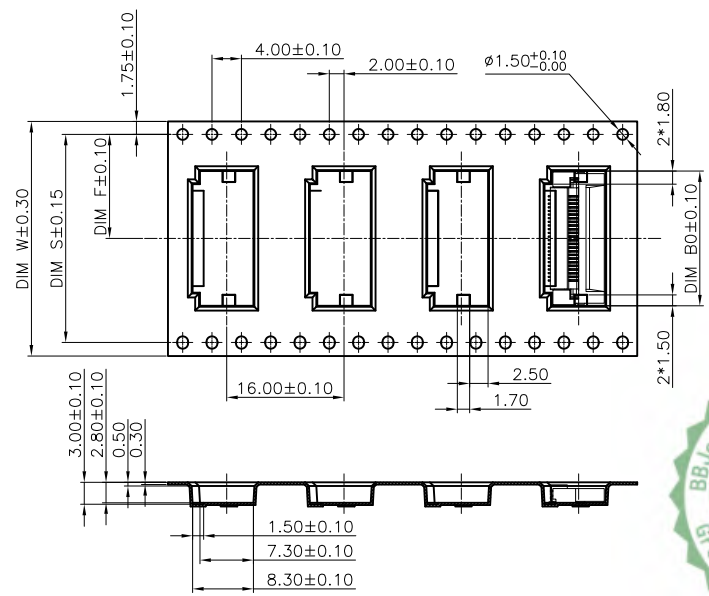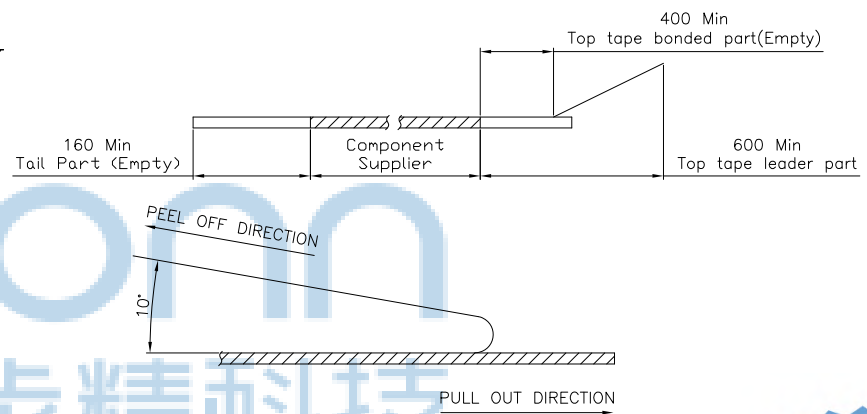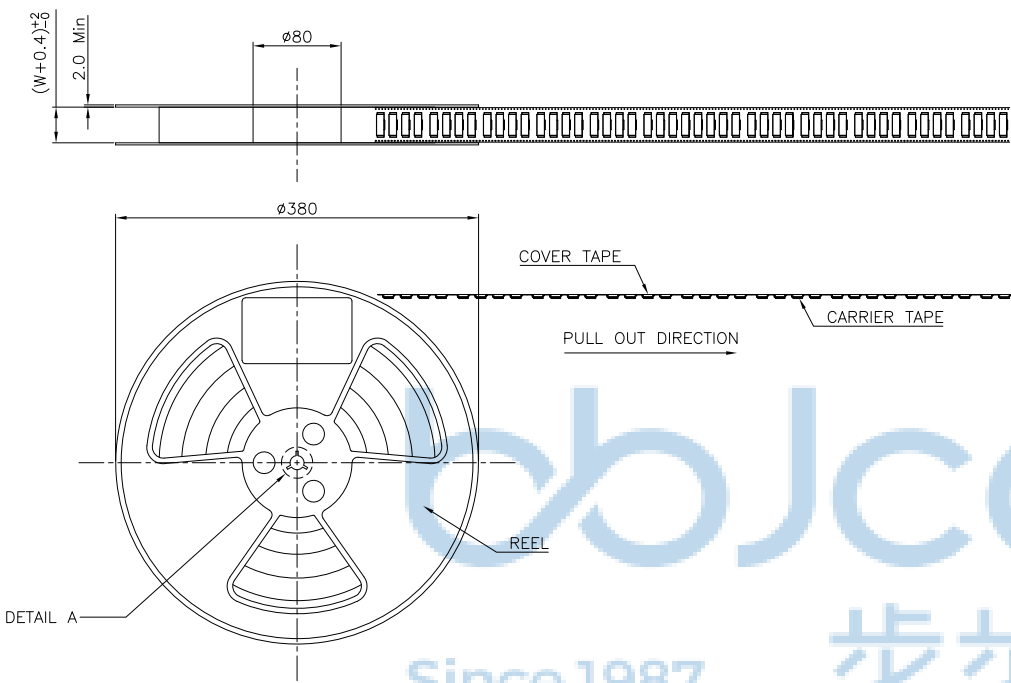

CKTS	DIM B0	DIM W	DIM S	DIM F
24	18.40	32.00	28.40	14.20
96	54.40	72.00	68.40	34.20

THIS DOCUMENT IS THE
SOLE PROPERTY OF
bbJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:0407-1

深圳市步步精科技有限公司		NAME:	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		FPC 0.5-24P 翻盖下接 H=2.5 编带 (AF534)	
APPD	JM_Zheng	PJ NO:	130-221-240013-W3G
CHKD	LYX	SIZE:A4	DRW NO:
FINISH:SEE NOTES		MAT'L:SEE NOTES	
SCALE:N/A		REV: A0	
UNIT:mm		PAGE: 2/2	