

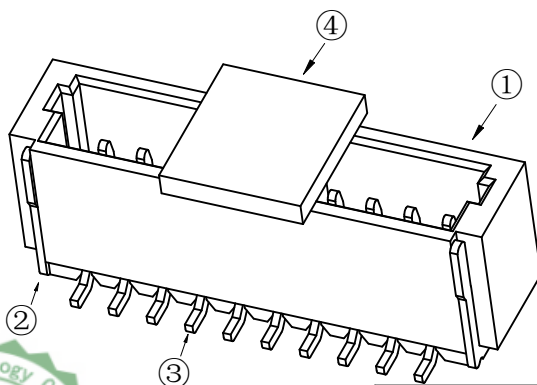
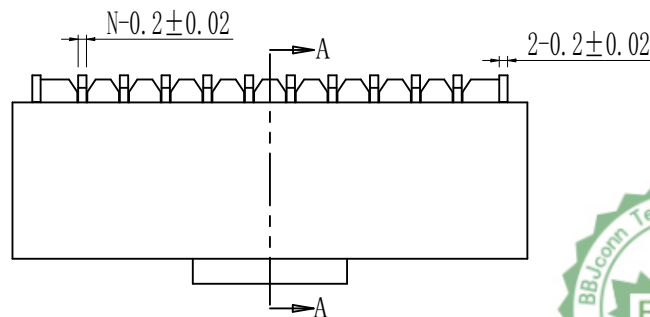
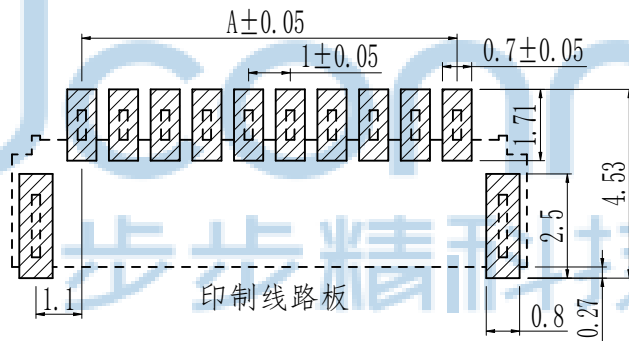
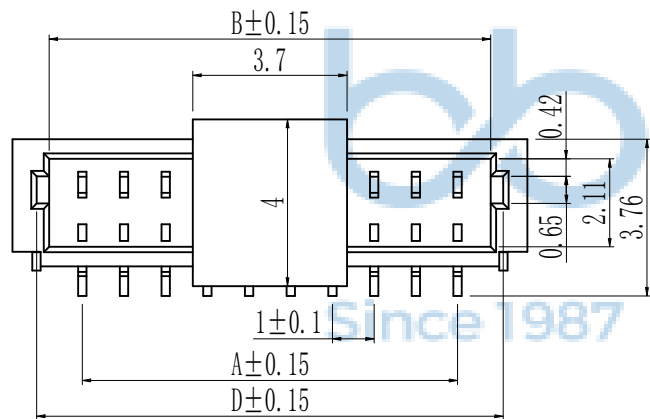


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

1. 技术参数:
- 1.1 额定电流: 1.0A AC/DC
 - 1.2 额定电压: 50V AC/DC
 - 1.3 耐电压: 500V ACminute
 - 1.4 接触电阻: 20mΩ MAX
 - 1.5 绝缘电阻: 100MΩ MIN
2. 工作温度: -25℃~+85℃

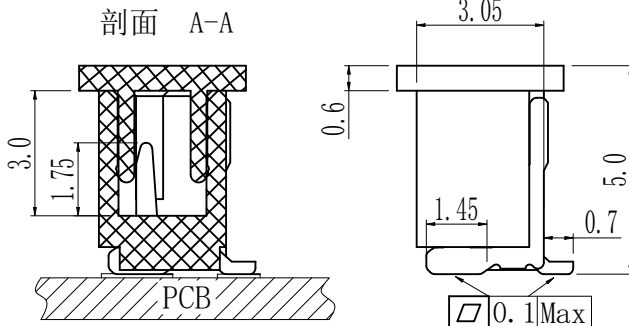



Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.0	2.5	4.3	3.2
3PIN	2.0	3.5	5.3	4.2
4PIN	3.0	4.5	6.3	5.2
5PIN	4.0	5.5	7.3	6.2
6PIN	5.0	6.5	8.3	7.2
7PIN	6.0	7.5	9.3	8.2
8PIN	7.0	8.5	10.3	9.2
9PIN	8.0	9.5	11.3	10.2
10PIN	9.0	10.5	12.3	11.2
11PIN	10.0	11.5	13.3	12.2
12PIN	11.0	12.5	14.3	13.2
13PIN	12.0	13.5	15.3	14.2
14PIN	13.0	14.5	16.3	15.2
15PIN	14.0	15.5	17.3	16.2
16PIN	15.0	16.5	18.3	17.2
17PIN	16.0	17.5	19.3	18.2
18PIN	17.0	18.5	20.3	19.2
19PIN	18.0	19.5	21.3	20.2
20PIN	19.0	20.5	22.3	21.2

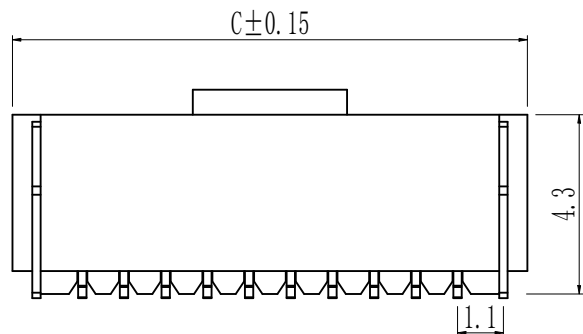

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	LCP	本色
②	焊片	2 PCS	磷铜C5191	亮锡
③	PIN针	2~16 PCS	磷铜C5191	亮锡
④	盖板	1 PCS	LCP	本色



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 针座 1.0-4P 立贴 加盖 米黄色 编带			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 123-244-040001-T4G			
DR. GZY		SCALE: N/A		SIZE: A4 DRW NO.:			
PDWG.NO: 0013-1		REV.: A0		FINISH: SEE NOTES MAT'L.: SEE NOTES			
		UNIT: mm		PAGE: 1/2			

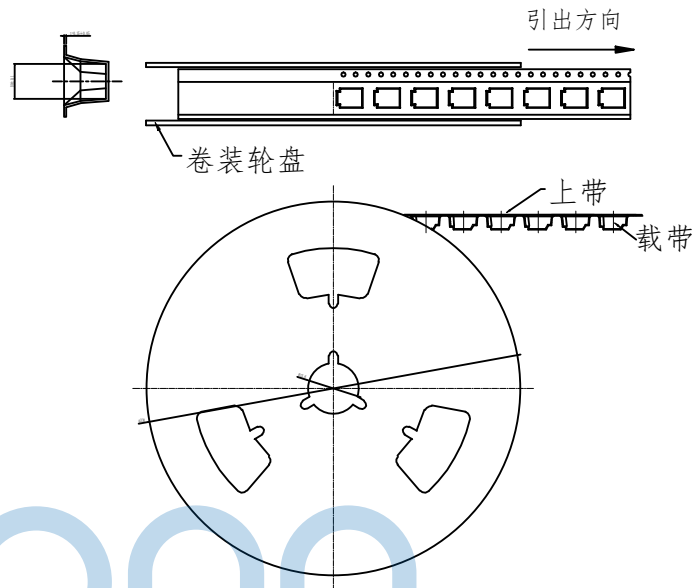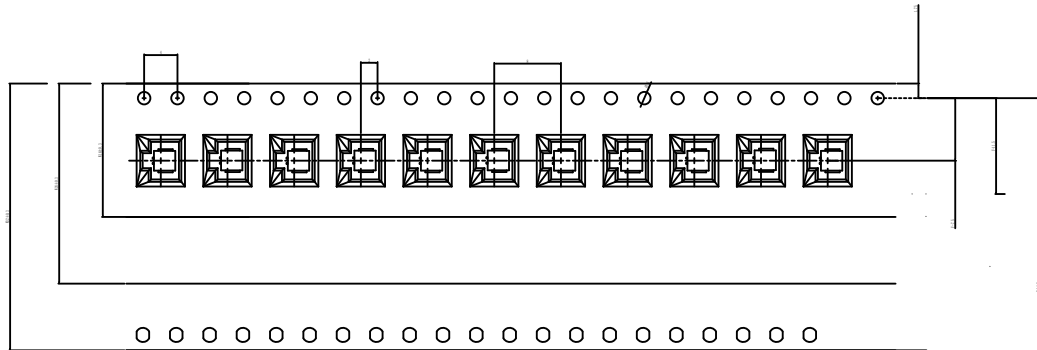

Circuits	载带尺寸		
	W	B0	F
1. 0LT-02	16.0	4.5	7.5
1. 0LT-03	16.0	5.5	7.5
1. 0LT-04	16.0	6.5	7.5
1. 0LT-05	16.0	7.5	7.5
1. 0LT-06	16.0	8.5	7.5
1. 0LT-07	24.0	9.5	11.5
1. 0LT-08	24.0	10.5	11.5
1. 0LT-09	24.0	11.5	11.5
1. 0LT-10	24.0	12.5	11.5
1. 0LT-11	24.0	13.5	11.5
1. 0LT-12	24.0	14.5	11.5
1. 0LT-13	24.0	15.5	11.5
1. 0LT-14	32.0	16.5	14.2
1. 0LT-15	32.0	17.5	14.2
1. 0LT-16	32.0	18.5	14.2

备注:

1. 材料: 载带PS 雾透色 t=0.3


热封/自粘上盖带: PET t=0.05mm.

纸箱: 纤维板、波纹、双墙, 黄色。


卷盘: 聚苯乙烯, 耐热温度: 70℃, 蓝色。

2. PET膜剥离力: 30~70g, 剥离速度: 300mm/分钟。

3. 带子前后预留:

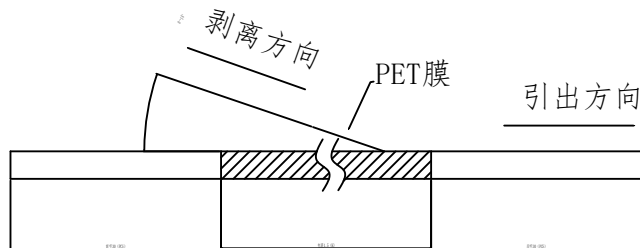

卷装包装明细			
PIN位	每卷包装数	每件盘数	每件数量
02P~06P	1500 (PCS)	20 (盘)	30 (K)
07P~13P	1500 (PCS)	14 (盘)	21 (K)
14P~16P	1500 (PCS)	11 (盘)	16.5 (K)

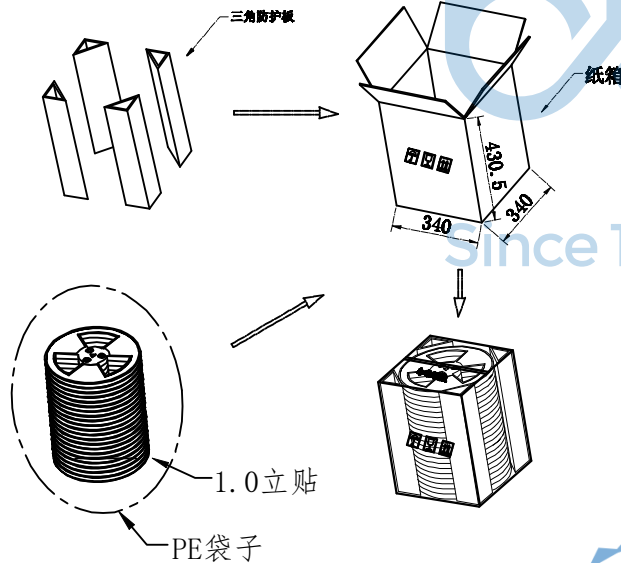

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

深圳市步步精科技有限公司

NAME: 针座 1.0-4P 立贴 加盖 米黄色 编带

PJ. NO.: 123-244-040001-T4G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2