

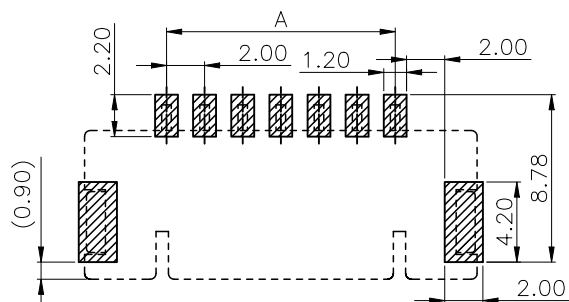
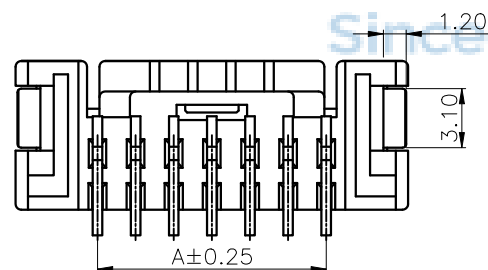

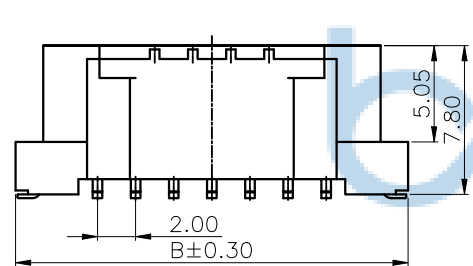


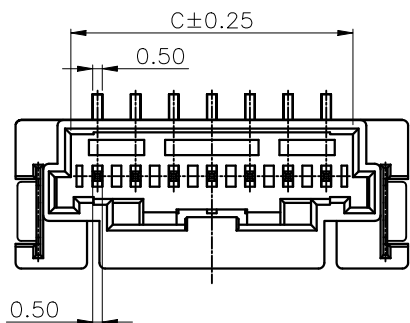


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Specifications:

Contact resistance: $\leq 25m\Omega$
Insulation resistance: $\geq 1000M\Omega$
Rated voltage: 125V AC DC
Rated current: 3.0A AC DC
Withstand Voltage: 1000V
AC/minute
Temperature Range: $-40^{\circ}C \sim +125^{\circ}C$
Housing: PA9T UL94V-0, Natural
Contacts: Phosphor Bronze/MATTE Sn
Solder Tabs: Brass/MATTE Sn

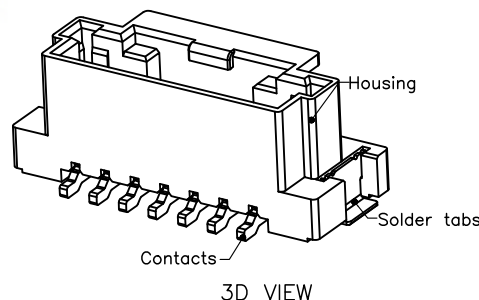

PCB LAYOUT(Tolerance:±0.05)

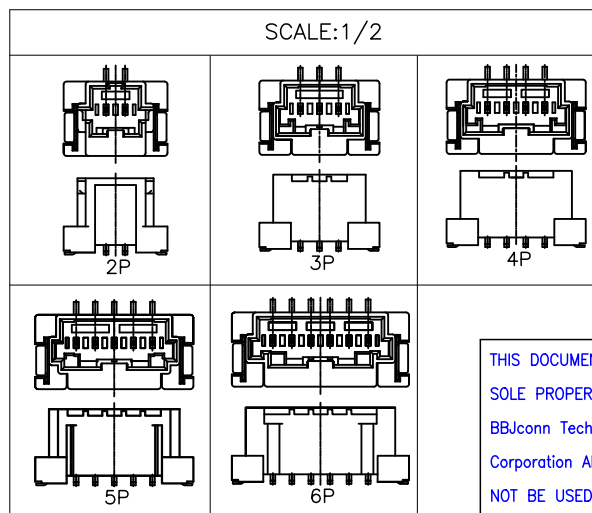

PIN	DIM A	DIM B	DIM C
2	2.0	10.9	4.8
3	4.0	12.6	6.8
4	6.0	14.6	8.8
5	8.0	16.6	10.8
6	10.0	18.6	12.8
7	12.0	20.6	14.8
8	14.0	22.6	16.8
9	16.0	24.6	18.8
10	18.0	26.6	20.8
11	20.0	28.6	22.8
12	22.0	30.6	24.8
13	24.0	32.6	26.8
14	26.0	34.6	28.8
15	28.0	36.6	30.8

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .X': ±1"

APPD JM_Zheng


CHKD LYX

DR

SGF

NAME:

针座 A2009-8AB (2.0-8P) 立贴 米黄色 编带



PJ NO: 123-274-080002-Y3G


SIZE:A4 DRW NO:

FINISH:SEE NOTES


SCALE:N/A

MAT'L:SEE NOTES


UNIT:mm PAGE:1/2

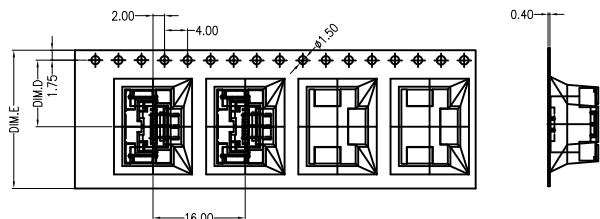





02~03 CONTACTS

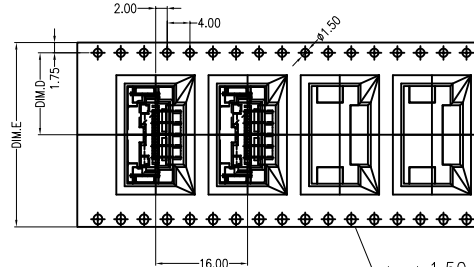

04~15 CONTACTS

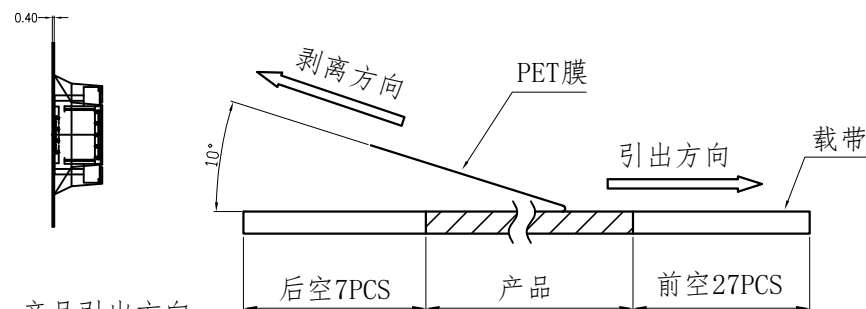

(PET膜剥离示意图)

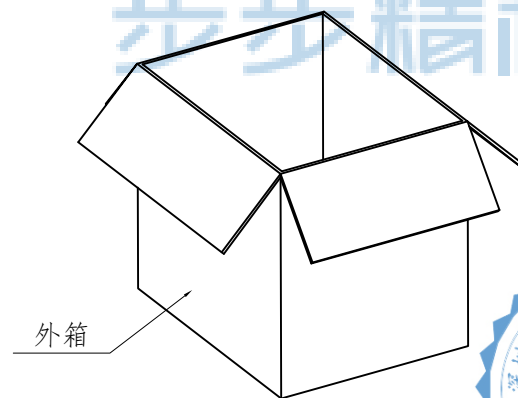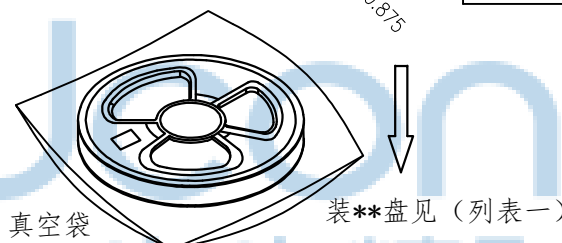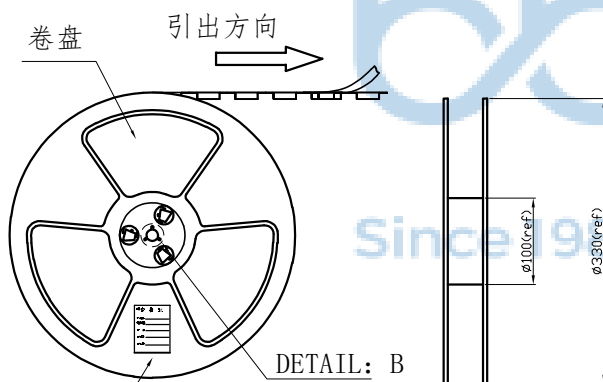

列表一:

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02~03 PIN	11.50	24	500PCS	15/Reel
04~06 PIN	14.25	32	500PCS	11/Reel
07~12 PIN	20.20	44	500PCS	8/Reel
13~15 PIN	26.20	56	500PCS	7/Reel

包装说明:

- 把成品包入卷盘中, 每盘装500PCS, 卷盘上贴上合格证, 将装好产品的卷盘含真空袋直接放进外箱中, 外箱上贴上合格证.
- 所有材料有害物控制符合RoHS标准.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:0510-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: 针座 A2009-8AB (2.0-8P) 立贴 米黄色 编带	
APPD	JM_Zheng	PJ NO: 123-274-080002-Y3G	SIZE:A4
CHKD	LYX	FINISH:SEE NOTES	MAT'L:SEE NOTES
DR	SGF	SCALE:N/A	REV: A0
		UNIT:mm	PAGE: 2/2