

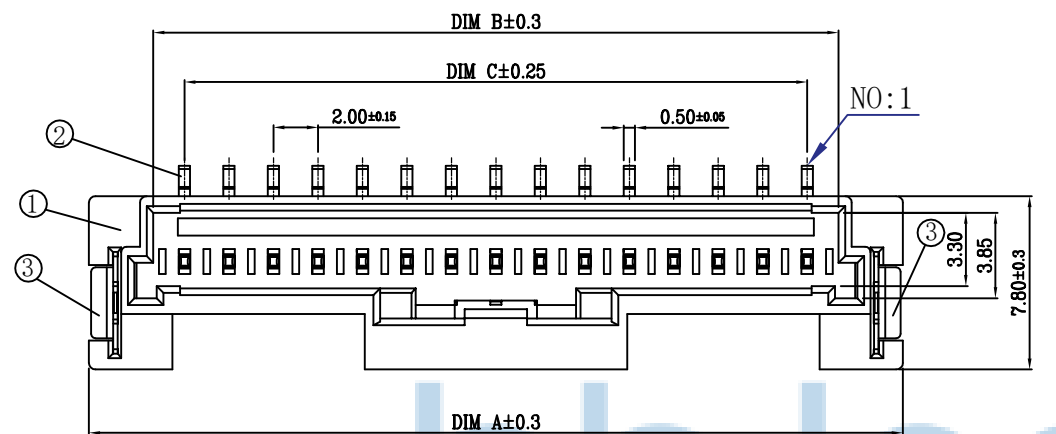



序号 (NO.)	品名 (Name)	材质 (Material)
①	MX2.0 Pitch B型立式 WTB胶芯	PA9T UL94 V-0, 颜色: 本色
②	MX2.0 Pitch B型立式 WTB端子	铜合金/表面镀锡
③	MX2.0 Pitch B型立式 WTB焊片	铜合金/表面镀锡

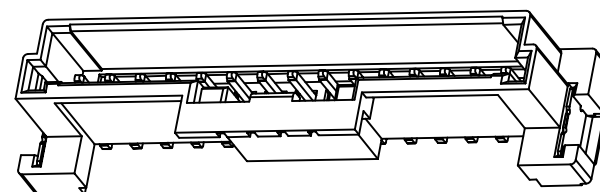


SECTION A-A



技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$ 。
3. 额定电压: 125V, AC/DC。
4. 额定电流: 2.0A AC DC (AWG#24, 0.1mm MAX)
5. 接触电阻: $\leq 40\text{m}\Omega$ 。
6. 绝缘电阻: $\geq 1000\text{M}\Omega$ 。
7. 耐电压: 500V AC/Minute















CKT	DIM A	DIM B	DIM C
2	10.90	4.80	2.00
3	12.60	6.80	4.00
4	14.60	8.80	6.00
5	16.60	10.80	8.00
6	18.60	12.80	10.00
7	20.60	14.80	12.00
8	22.60	16.80	14.00
9	24.60	18.80	16.00
10	26.60	20.80	18.00
11	28.60	22.80	20.00
12	30.60	24.80	22.00
13	32.60	26.80	24.00
14	34.60	28.80	26.00
15	36.60	30.80	28.00

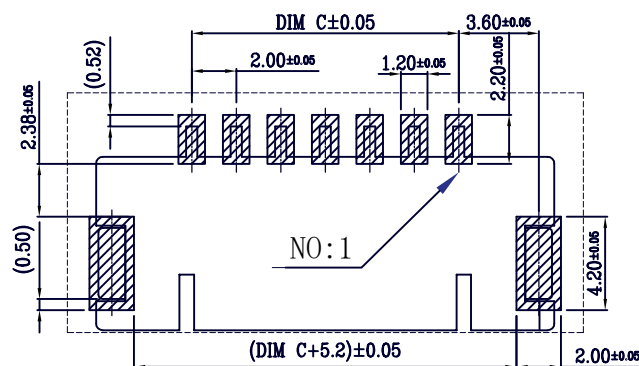

适用线路板 (PCB LAYOUT)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .X': $\pm 1'$		NAME: 针座 MX 2.0-4P 立贴 PA9T本色 编带	
APPD.	JM_Zheng	PJ. NO.: 123-274-040002-X3G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0456-1	DR.	GZY	SCALE: N/A	REV.: AO UNIT: mm PAGE: 1/2

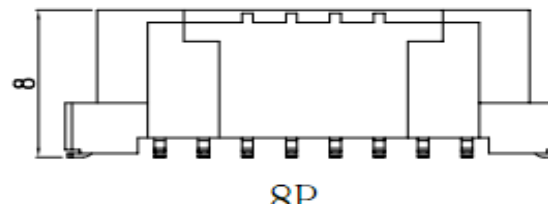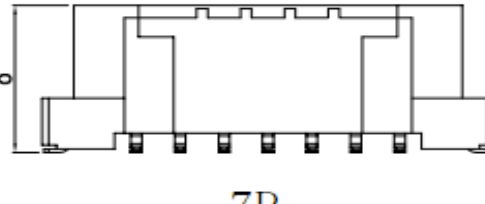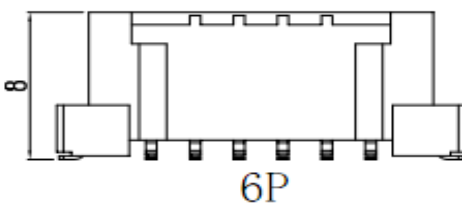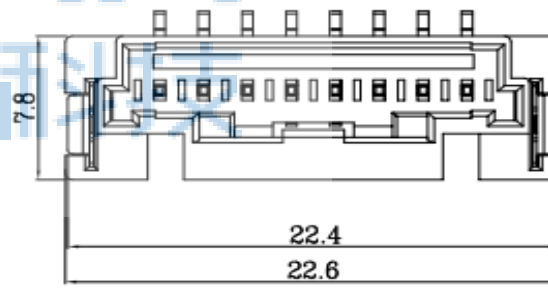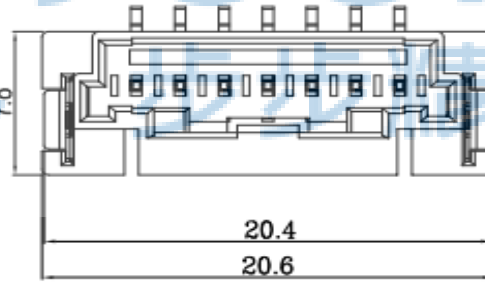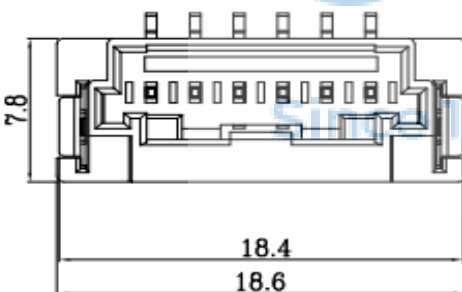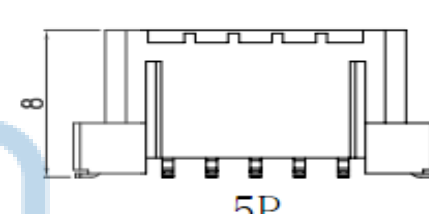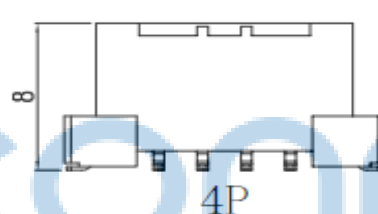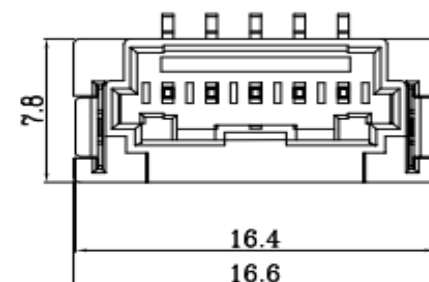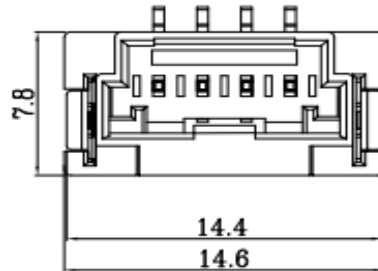

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3^\circ$
.XX: ± 0.25 .X'': $\pm 2^\circ$
.XXX: ± 0.13 .X''': $\pm 1^\circ$

NAME:
针座 MX 2.0-4P 立贴 PA9T本色 编带

APPD. JM_Zheng

PJ. NO.: 123-274-040002-X3G

CHKD. LYX











SIZE: A4 DRW NO.:

DR. GZY

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

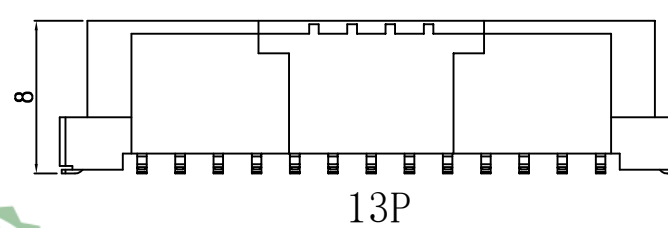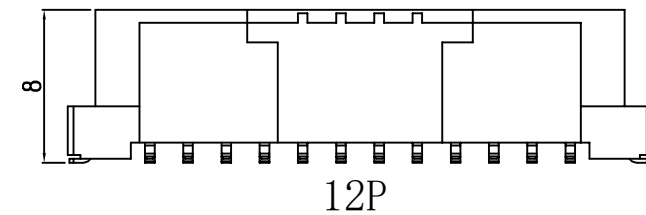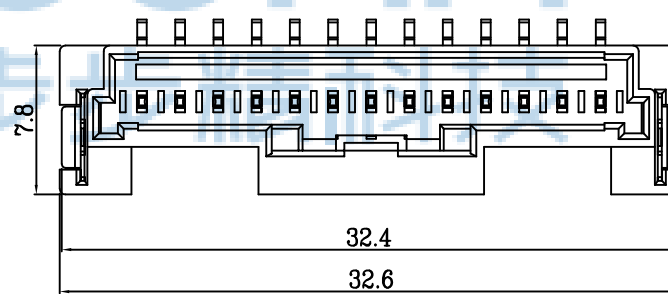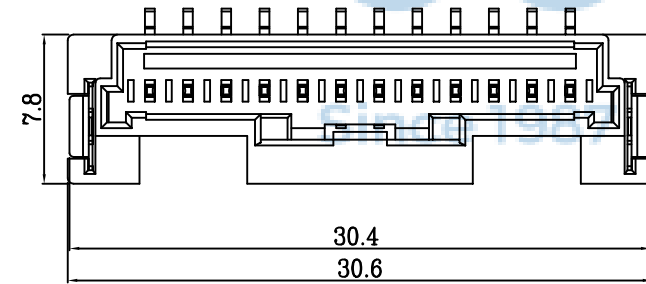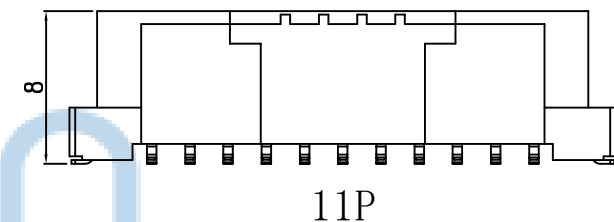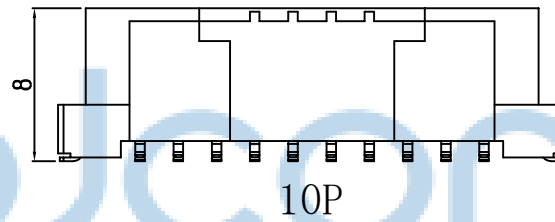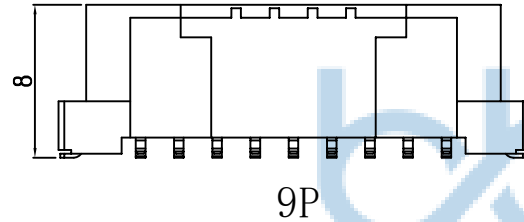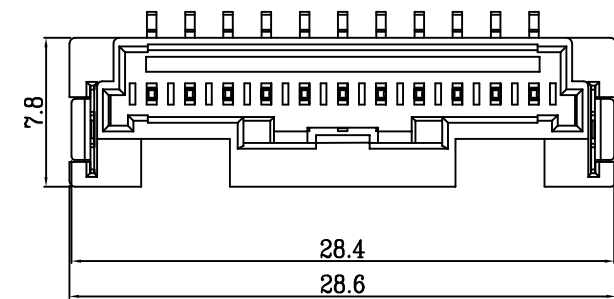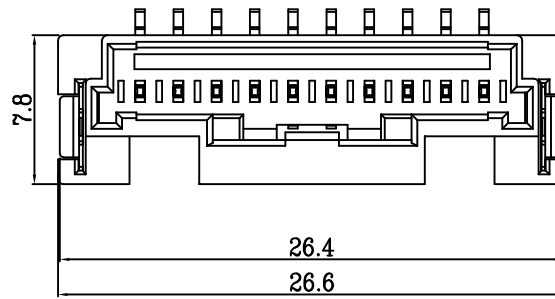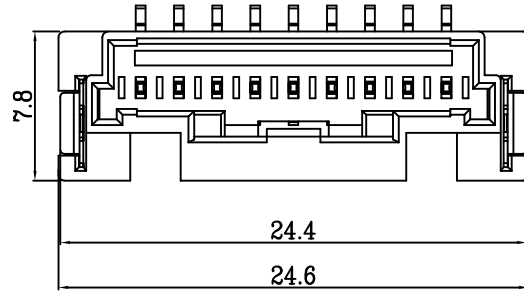



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: 针座 MX 2.0-4P 立贴 PA9T本色 编带			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 123-274-040002-X3G			
DR. GZY		PDWG.NO: 0456-1		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

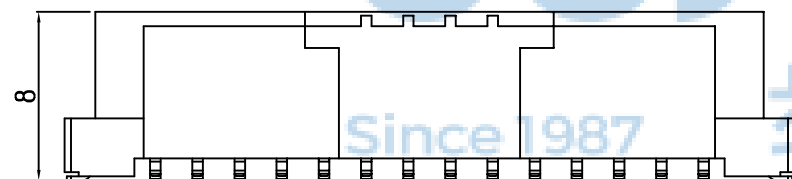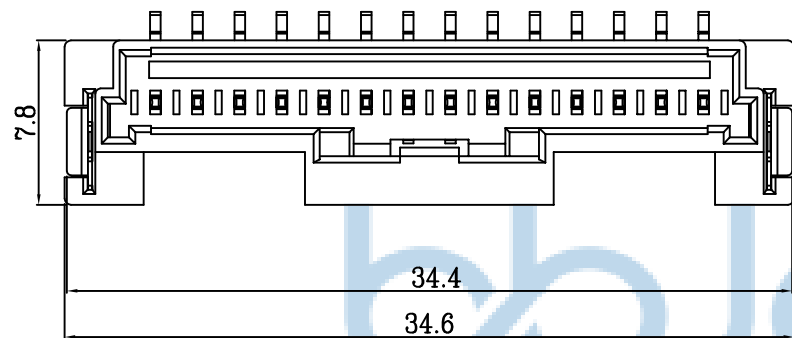





14P

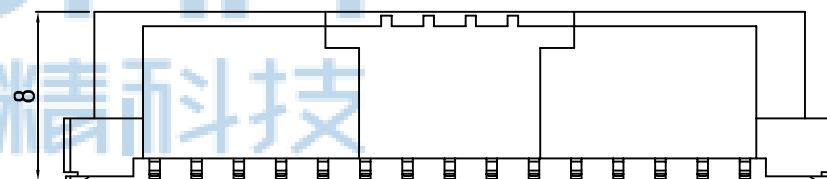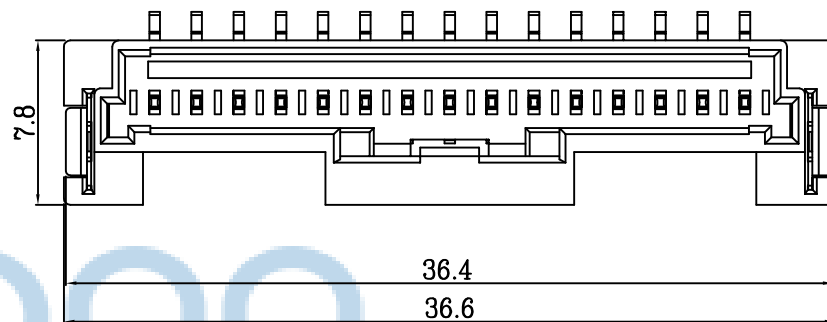

15P



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0456-1		深圳市步步精科技有限公司			
		.X: ±0.38 .X': ±3° .XX: ±0.25 .X': ±2° .XXX: ±0.13 .XX': ±1°		NAME: 针座 MX 2.0-4P 立贴 PA9T本色 编带	
	APPD. JM_Zheng		PJ. NO.:123-274-040002-X3G		
	CHKD. LYX		SIZE: A4 DRW NO.:		
			FINISH: SEE NOTES	MAT'L.: SEE NOTES	
	DR. GZY	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

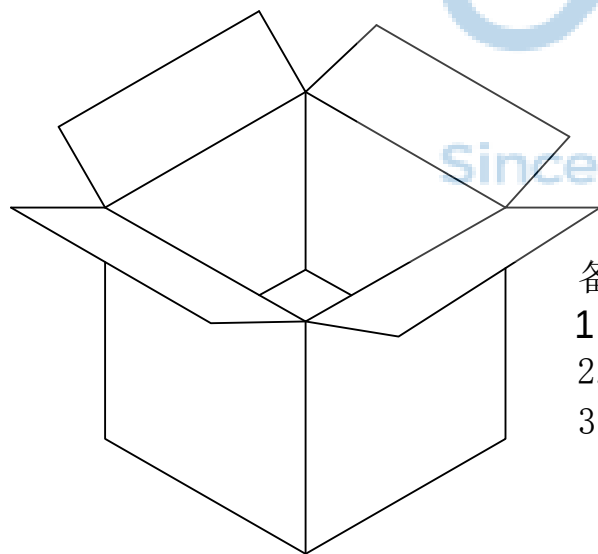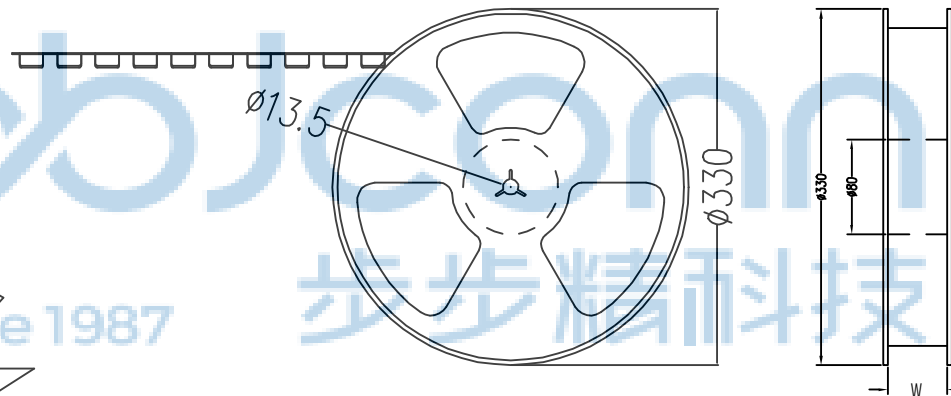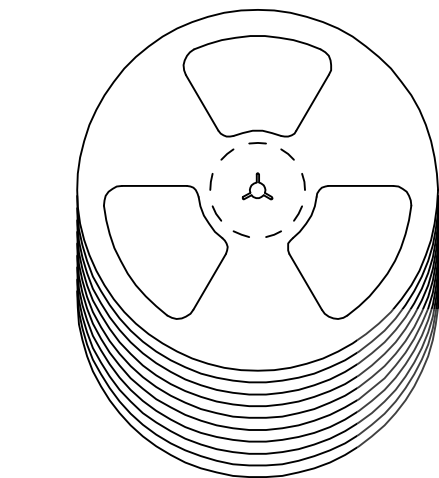

备注:

1. 包装数量：500/PCS/卷，10卷/箱
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*230MM

纸箱规格：345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0456-1		 深圳市步步精科技有限公司		NAME: 针座 MX 2.0-4P 立贴 PA9T本色 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		PJ. NO.: 123-274-040002-X3G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
DR. GZY		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0		UNIT: mm	
				PAGE: 2/2	