

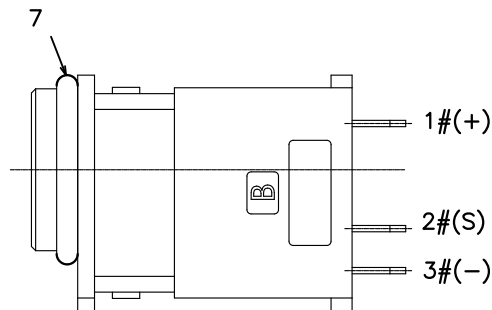
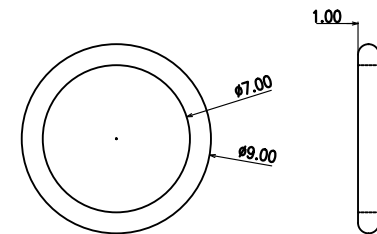

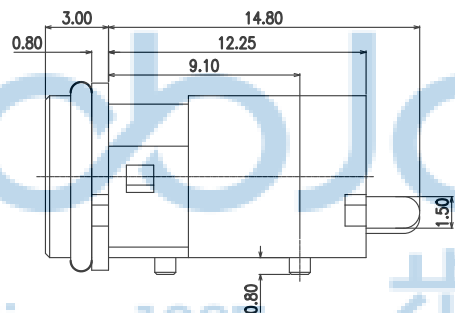
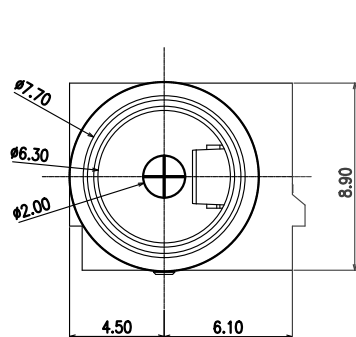



3D VIEW

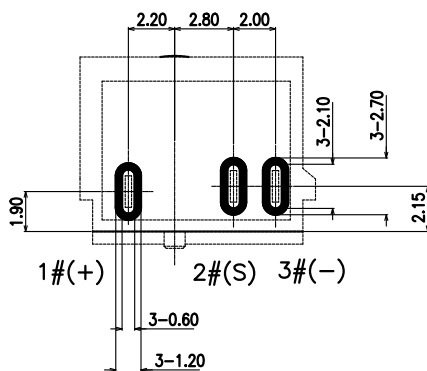

WHITE WATERPROOF RING




PCB LAYOUT (TOP VIEW)
TOLERANCE: ± 0.05

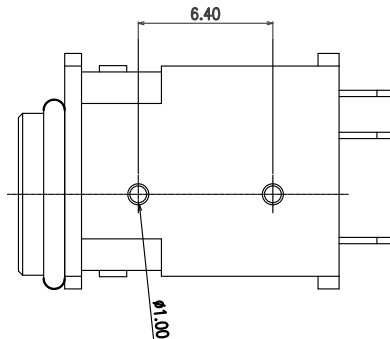


7	WATERPROOF RING	SILICONE	WHITE	1
6	GLUE	EPOXY	COLOR BLACK	1
5	BACK COVER	HIGH TEMPERATURE	COLOR BLACK	1
4	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1
3	TERMINAL 3#	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA	1
2	TERMINAL 2#	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE	1
1	CENTER PIN 1#	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

Not to install the waterproof ring shipment

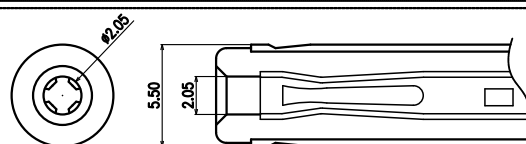

Circuit Diagram




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0498-1

深圳市步步精科技有限公司		NAME: DC座 2.0针 防水 三脚插 带柱 立插 IPX7 全铜 0型防水圈 编带	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$	PJ. NO.: 116-305-030001-J8G SIZE: A4 DRW NO.:	
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES	MAT'L: SEE NOTES
DR. SGF	SCALE: N/A	REV.: A0	UNIT: mm
			PAGE: 1/2

NOTES

1. CURRENT RATING: 24V & 5A MAX.
2. CONTACT RESISTANCE: 50m Ω MAX.
3. INSULATION RESISTANCE: 100M Ω MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3N MIN.
7. CONNECTOR UNMATING FORCES: 35N MAX.
8. OPERATING TEMPERATURE: -25°C TO +85°C.
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

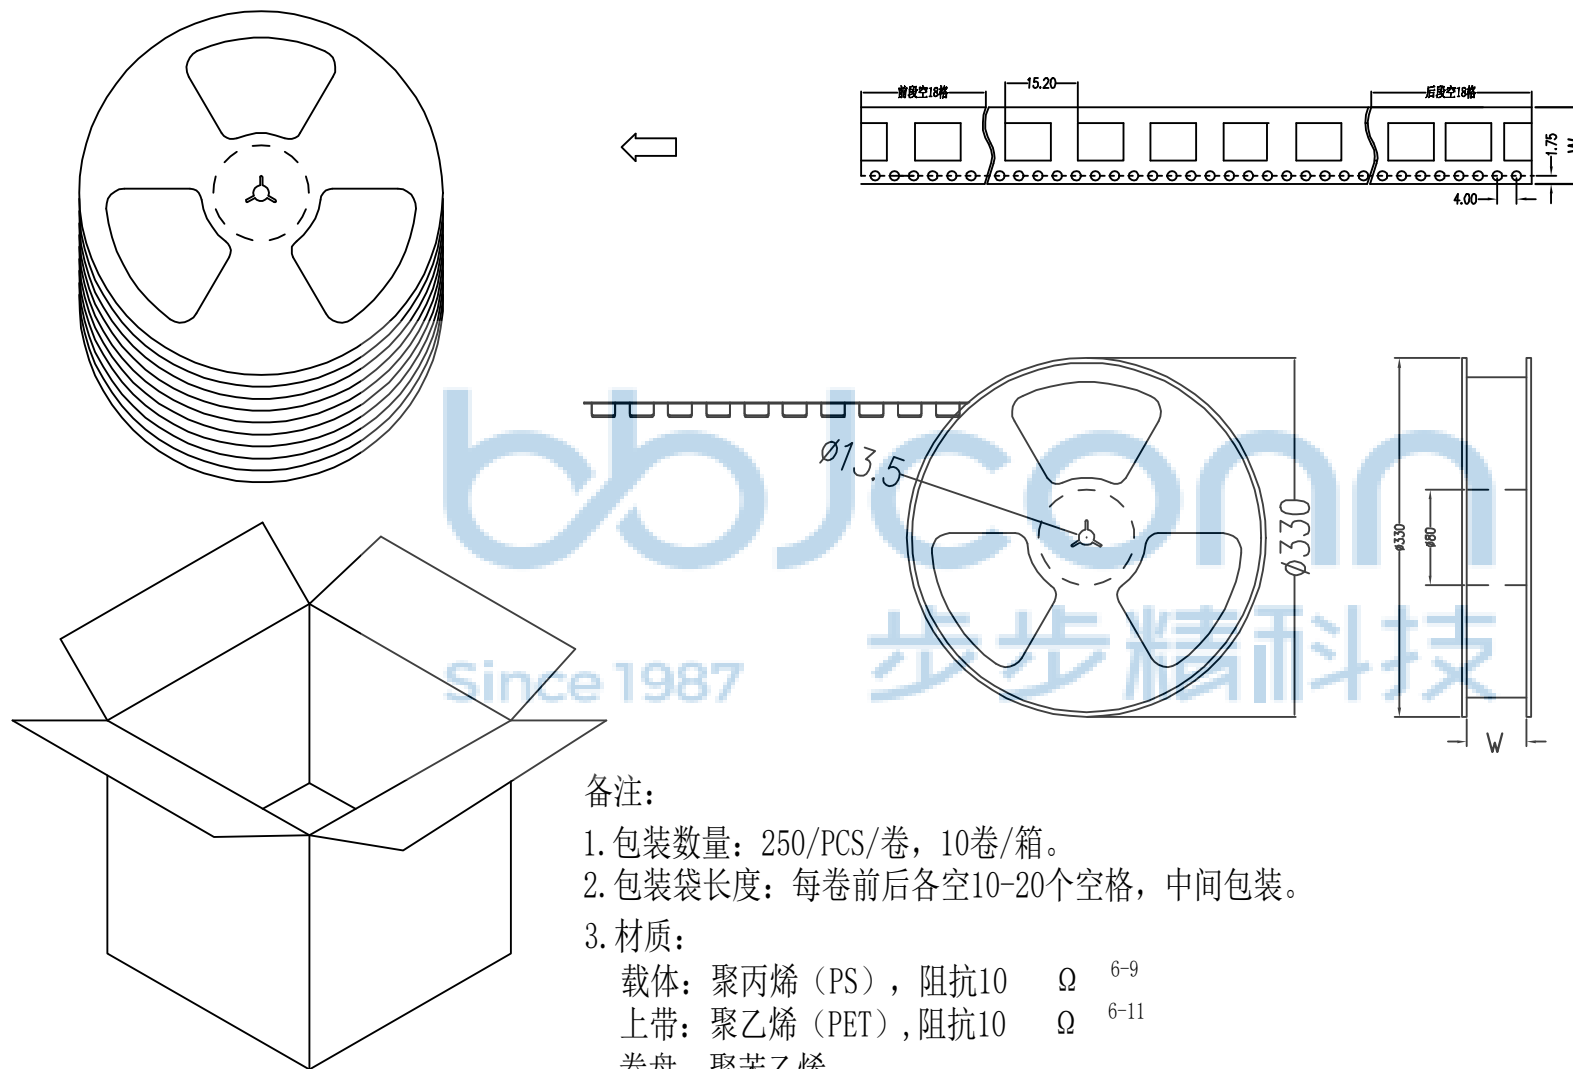

备注:

- 包装数量: 250/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
 - 载体: 聚丙烯 (PS), 阻抗10 Ω 6-9
 - 上带: 聚乙烯 (PET), 阻抗10 Ω 6-11
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: DC座 2.0针 防水 三脚插 带柱 立插 IPX7 全铜 0型防水圈 编带	
APPD. JM_Zheng		PJ. NO.: 116-305-030001-J8G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0498-1		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	