
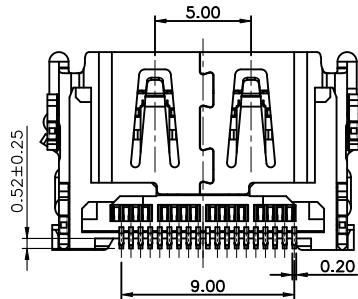
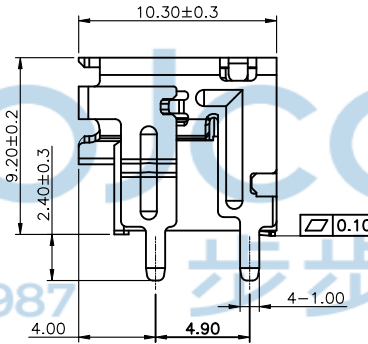
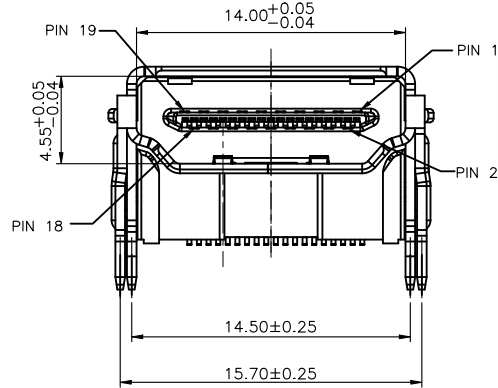


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	




NOTE:
 1.MATERIAL AND FINISH SEE THE TABLE.
 2.MECHANICAL CHARACTERISTICS
 INSERTION FORCE: 44.1N MAX
 EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
 MATING CYCLE:10000 CYCLES
 3.ELECTRICAL CHARACTERISTICS
 RATING CURRENT: 0.5A
 RATING VOLTAGE: 40V
 CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
 (EXCLDING CONDUCTOR RESISTANCE)
 INSULATION RESISTANCE:
 a, UNMATED: 100M OHMS MIN AT 500 VDC
 b, MATED: 10M OHMS MIN AT 150 VDC
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/1MINUTE
 OPERATING TEMPERATURE: -20°C---+85°C
 STORAGE TEMPERATURE: -20°C---+65°C

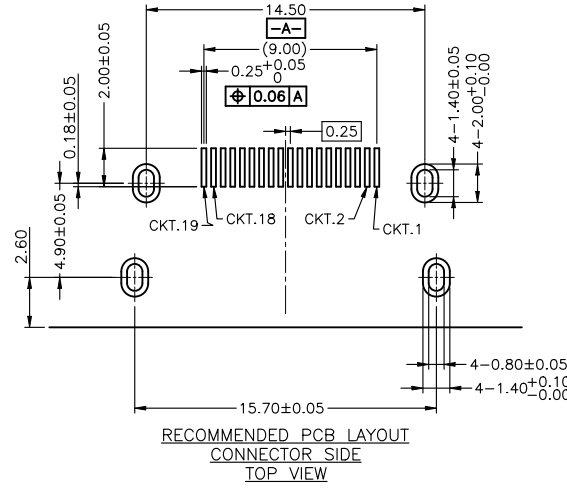

MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	C2680 T=0.50	NICKEL PLATED
2	TERMINAL	19	C2680 T=0.20	AU/TIN PLATED
1	HOUSING	1	LCP BLACK	(UL94V-0)


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
APPD. JM_Zheng		NAME: HDMI A TYPE 母座 L=10.30 90度 板上四脚直插 垫高款 H=9.20 铜壳镀镍 端子SMT 镀金G/F 编带	
CHKD. LYX		PJ. NO.: 124-221-190010-J8G	
PDWG.NO: 0873-1		SIZE: A4 DRW NO.:	
DR.		FINISH: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

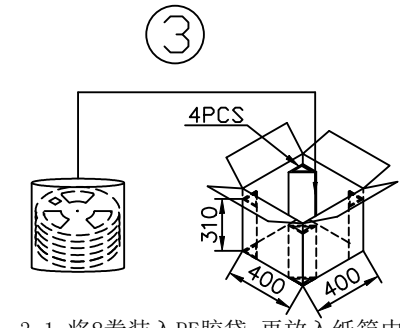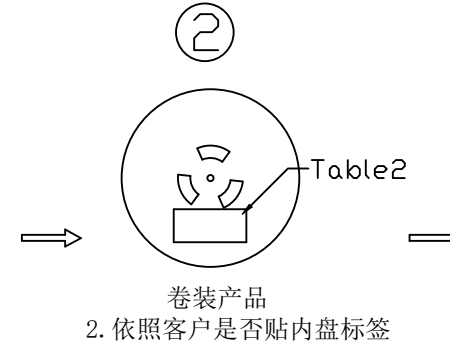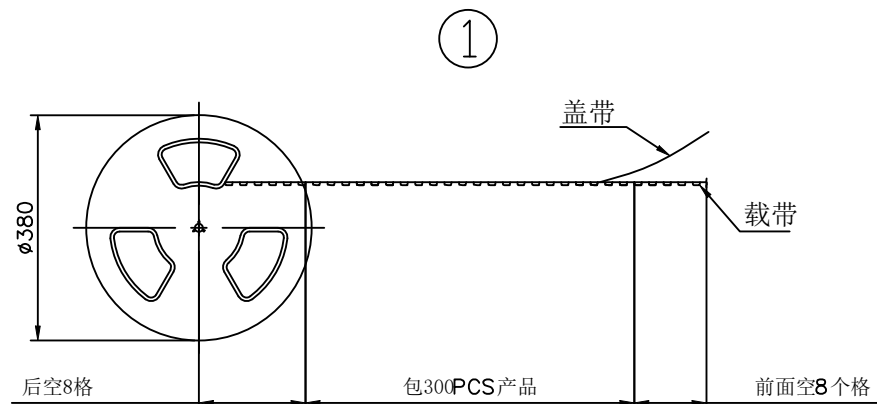

3-1. 将8卷装入PE胶袋, 再放入纸箱中。
3-2. 纸箱4个角落用缓冲材料塞好, 并盖上与之相配的纸板。
备注: 纸箱的规格: 400*400*310mm

3-3. 包装明细:


卷/每箱	PCS/每卷	PCS/每箱
8卷/每箱	300PCS/每卷	2400PCS/每箱

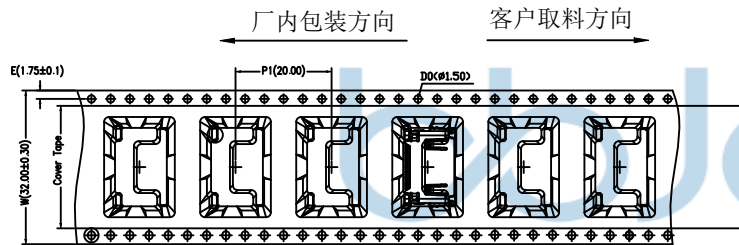

1. 按图包装, 前、后各空格8PCS, 300PCS/REEL

Since 1987

步步精科技

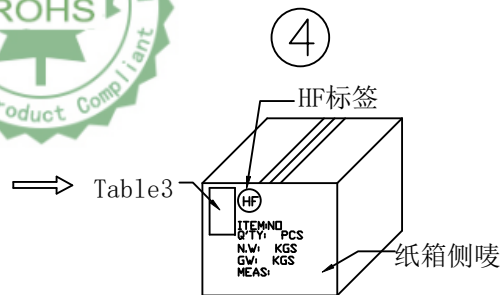

4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱, 必须以缓冲材塞
4-3. 依照客户要求贴标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: HDMI A TYPE 母座 L=10.30 90度 板上四脚直插 垫高款 H=9.20 铜壳镀镍 端子SMT 镀金G/F 编带	
APPD.	JM_Zheng	PJ. NO.: 124-221-190010-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0873-1	DR.	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	